

S. HRG. 109-345

**ALTERNATIVE AUTOMOTIVE TECHNOLOGIES AND  
ENERGY EFFICIENCY**

---

---

**HEARING**

BEFORE THE

**JOINT ECONOMIC COMMITTEE  
CONGRESS OF THE UNITED STATES**

ONE HUNDRED NINTH CONGRESS

FIRST SESSION

—————  
JULY 28, 2005  
—————

Printed for the use of the Joint Economic Committee



U.S. GOVERNMENT PRINTING OFFICE

24-915 PDF

WASHINGTON : 2006

---

For sale by the Superintendent of Documents, U.S. Government Printing Office  
Internet: [bookstore.gpo.gov](http://bookstore.gpo.gov) Phone: toll free (866) 512-1800; DC area (202) 512-1800  
Fax: (202) 512-2250 Mail: Stop SSOP, Washington, DC 20402-0001

JOINT ECONOMIC COMMITTEE

[Created pursuant to Sec. 5(a) of Public Law 304, 79th Congress]

**HOUSE OF REPRESENTATIVES**

JIM SAXTON, New Jersey, *Chairman*  
PAUL RYAN, Wisconsin  
PHIL ENGLISH, Pennsylvania  
RON PAUL, Texas  
KEVIN BRADY, Texas  
THADDEUS G. McCOTTER, Michigan  
CAROLYN B. MALONEY, New York  
MAURICE D. HINCHET, New York  
LORETTA SANCHEZ, California  
ELIJAH E. CUMMINGS, Maryland

**SENATE**

ROBERT F. BENNETT, Utah, *Vice Chairman*  
SAM BROWNBACK, Kansas  
JOHN SUNUNU, New Hampshire  
JIM DEMINT, South Carolina  
JEFF SESSIONS, Alabama  
JOHN CORNYN, Texas  
JACK REED, Rhode Island  
EDWARD M. KENNEDY, Massachusetts  
PAUL S. SARBANES, Maryland  
JEFF BINGAMAN, New Mexico

CHRISTOPHER J. FRENZE, *Executive Director*  
CHAD STONE, *Minority Staff Director*

# CONTENTS

## OPENING STATEMENT OF MEMBERS

Statement of Hon. Jim Saxton, Chairman, a U.S. Representative from the State of New Jersey .....	1
Statement of Hon. Carolyn B. Maloney, a U.S. Representative from the State of New York .....	2
Statement of Hon. Thaddeus G. McCotter, a U.S. Representative from the State of Michigan .....	13
Statement of Hon. Maurice D. Hinchey, a U.S. Representative from the State of New York .....	15

## WITNESSES

Statement of Hon. David K. Garman, Under Secretary of Energy, U.S. Department .....	4
Statement of Joe Loper, Vice President, Alliance to Save Energy .....	19
Statement of Tom Stricker, National Manager, Technical and Regulatory Affairs, Toyota Motor North America, Inc. ....	22
Statement of Mary Ann Wright, Director, Sustainable Mobility Technologies and Hybrid and Fuel Cell Vehicle Programs, Ford Motor Company .....	25
Statement of Mark Chernoby, Vice President, Advanced Vehicle Engineering, DaimlerChrysler Corporation .....	27

## SUBMISSIONS FOR THE RECORD

Prepared statement of Representative Jim Saxton, Chairman .....	37
Prepared statement of Representative Carolyn B. Maloney .....	37
Prepared statement of David K. Garman .....	38
Responses to questions from:	
Hon. Jim Saxton, Chairman .....	63
Hon. Maurice D. Hinchey .....	63
Prepared statement of Joe Loper .....	45
Prepared statement of Tom Stricker .....	49
Prepared statement of Mary Ann Wright .....	53
Response to question from Mr. Hinchey .....	61
Prepared statement of Mark Chernoby .....	54





# ALTERNATIVE AUTOMOTIVE TECHNOLOGIES AND ENERGY EFFICIENCY

THURSDAY, JULY 28, 2005

CONGRESS OF THE UNITED STATES,  
JOINT ECONOMIC COMMITTEE,  
*Washington, DC*

The Committee met, pursuant to call, at 10:00 a.m., in room 2226, Rayburn House Office Building, Hon. Jim Saxton (Chairman of the Committee) presiding.

**Present:** Representatives Saxton, McCotter, Maloney, Hinchey, and Cummings.

**Staff Present:** Chris Frenze, Ted Boll, Chad Stone, Colleen Healy, and John Kachtik.

## OPENING STATEMENT OF HON. JIM SAXTON, CHAIRMAN, A U.S. REPRESENTATIVE FROM NEW JERSEY

**Representative Saxton.** Good morning. I am pleased to welcome Under Secretary Garman and the other expert witnesses before the Committee this morning.

With oil prices in the neighborhood of \$60 per barrel, it is not surprising that there is increased interest in fuel efficiency and alternative ways of powering cars and trucks. Increased demand for oil, especially from Asia, combined with the restrictive practices of the OPEC cartel, have together created a situation where oil prices have spiked in recent months. With OPEC members only last December complaining about an "overproduction" of oil, it is abundantly clear that we cannot depend on them to be reliable suppliers of petroleum. Unfortunately, according to many experts, OPEC has elevated oil prices and they may be with us for quite some extended period of time.

It is interesting to point out that while OPEC members have 70 percent of the oil reserves, they produce only a total of 40 percent of our needs. Gasoline accounts for about 45 percent of American oil consumption each day, so it is appropriate to consider the long-term potential of alternative automotive technologies that would reduce our dependency on foreign oil.

The purpose of this hearing is to explore these alternatives and examine which of them seem to be the most feasible over the short, medium and long terms. Greater efficiency in internal combustion engines, using methods such as shutting off half the cylinders when maximum power is not needed, is already being realized. Flexible fuel vehicles, capable of burning a mixture of gasoline and up to 85 percent alcohol are already in production. Recently I have introduced legislation to enhance tax incentives for the purchase of

flexible fuel vehicles. U.S. auto companies already make millions of flexible fuel vehicles that are only slightly more expensive to produce than cars that run on conventional engines.

The market for hybrid vehicles is also expanding far beyond small economy cars and this promises additional savings. Small hybrid cars demonstrated the feasibility of this technology, and it is now being applied to mid-sized passenger cars, as well as to SUVs. As a matter of fact, the Department of Defense has even manufactured a tank with a hybrid engine. There are some exciting new refinements of hybrid technology that could produce significant increases in fuel efficiency. Perhaps the future hybrid and electric vehicles could even be recharged using the existing power grid.

None of these technologies alone is likely to reduce our oil consumption significantly over the short run. But over the next decade or two, they could make a real difference and synergies between them offer the potential for further gains. For example, improved efficiencies of the internal combustion engine could be combined with hybrid and other technologies to maximize fuel savings.

Over the long run, the high price of oil is likely to create incentives for other technology breakthroughs that will produce even more dramatic savings. Hydrogen fuel cells offer one promising technology for the long term. Since power can be most efficiently generated in power plants, there are those who argue that a transition to hydrogen fuel cell or electric vehicles offers the most promising technologies for coming decades.

In any event, continued Federal Government and industry support for research and development, and the vision of entrepreneurs and inventors, are needed to ensure the advancements in technology that will enable us to eventually increase our energy security.

[The prepared statement of Representative Jim Saxton appears in the Submissions for the Record on page 37.]

I turn now to Mrs. Maloney.

**OPENING STATEMENT OF HON. CAROLYN B. MALONEY,  
A U.S. REPRESENTATIVE FROM NEW YORK**

**Representative Maloney.** Thank you very much, and thank you, Chairman Saxton, and welcome, Mr. Garman. The question of what role alternative automotive technologies will play in our energy future is an extremely important one, and I hope we will be able to learn things from this hearing that can inform our future policy choices.

We are heavily reliant on oil to power our cars and fuel our lifestyle and 58 percent of the oil we consume is imported, often from politically volatile regions of the world. Promoting conservation, raising efficiency standards and supporting research and development can all play an important role in overcoming our dependence on oil and reducing our reliance on imports.

Today more than two-thirds of the oil consumed in the United States is used for transportation, mostly for cars and light trucks. Increasing fuel efficiency would lower pressures on oil prices, enhance our national security, curb air pollution and reduce the emission of greenhouse gases, which cause global warming. Clearly, alternative fuel and automotive technologies are needed to help

achieve these goals, but we cannot overlook the importance of other approaches.

CAFE standards, the Corporate Average Fuel Economy standards, for cars have remained static for 2 decades and the average vehicle fuel economy has actually declined since the late 1980s when sales of SUVs begin to climb. Car manufacturers could increase the average fuel economy from today's 27.5 miles per gallon to 46 miles per gallon just by implementing existing technologies, according to a recent MIT report. This would reduce our dependence on foreign oil by three-fourths and cut greenhouse gas emissions by nearly a third.

The auto industry is pursuing a variety of advanced vehicle technologies, such as hybrid vehicles, fuel cells and hydrogen fuel. While hybrid vehicles have received a great deal of attention, they still make up only 1 percent of the 17 million vehicles sold in the United States each year. However, some hybrids don't contribute much to energy efficiency, as car companies are building more high end, high-performance vehicles.

Congress needs to be careful about which technologies it subsidizes. We should make sure that we are not prematurely committing to any particular technology and neglecting other potentially beneficial approaches. We also should make sure that tax incentives are well targeted to achieving their objectives, rather than simply subsidizing behavior that would have taken place anyway. It doesn't make much sense to give a tax break when manufacturers are wait-listing customers for certain models. The demand is already there. The cars are not.

My sister-in-law had to wait 3 years to get a hybrid car. There is a waiting list for them. People want them. The auto industry is not developing or putting them out for sale fast enough.

I will be interested to learn more about whether the President's initiative to promote hydrogen fuel and fuel cells has realistic goals or is just science fiction. Right now there is a danger that hydrogen and hydrogen fuel cells may never be commercialized because they are so expensive and this initiative may draw funding away from near-term technologies such as hybrids.

I have more questions, but I will stop here, because we have a panel—two panels, as I understand it. I hope that they will be able to provide us with more information on the intriguing technological possibilities that lie before us.

So I look forward to getting more solid information, and I thank you for calling this hearing.

[The prepared statement of Representative Carolyn B. Maloney appears in the Submissions for the Record on page 37.]

**Representative Saxton.** Thank you very much. We are going to hear first from Under Secretary of Energy, the Honorable David K. Garman, from the Energy Department. Then we are going to turn to three important representatives of industry who are knowledgeable about the technology that we have been fortunate to have developed, which goes to the issues that Mrs. Maloney and I have just been talking about.

I would just like to make one other short comment. I recently had the opportunity to read something that was written in 1999 by the People's Liberation Army representatives of China. It was ti-

tled "Unrestricted Warfare," and it talks about the long-range strategies of some of our foes overseas, in this case of course China. The notion of unrestricted warfare relates to the national security of our country, and essentially what it talked about was strategies that some of our foes could use to accomplish goals which perhaps traditionally have been accomplished through military means, such as information technology, and other various means that our foes could use to affect our economy and, therefore, disadvantage us. It is pretty clear to me that unrestricted warfare is not as new as we might think it is by reading what the Chinese write.

As a matter of fact, over the last several decades, OPEC has used a strategy to disadvantage our economy. Today some OPEC members produce oil at about \$1.50 a barrel. Think of that. We are paying \$60 a barrel. That is primarily, from my point of view, because of underproduction by OPEC countries who produce about 40 percent of what we need. They could be producing much more than that inasmuch as they control about 70 percent of the oil reserves that exist in the world. So it would behoove us as a society to become energy independent, so that we don't have to rely on those who are underproducing petroleum.

So, Mr. Garman, thank you for being with us here today. To me this is an extremely important subject and one that through government and through industry we need to move on to rectify this problem that we find ourselves in.

**STATEMENT OF HON. DAVID K. GARMAN, UNDER SECRETARY OF ENERGY, U.S. DEPARTMENT OF ENERGY**

**Mr. Garman.** Thank you, and understanding that my full statement will be inserted into the record, I will summarize briefly.

**Representative Saxton.** Without objection.

**Mr. Garman.** The global economy consumes roughly 80 million barrels a day and 20 million barrels are consumed in the United States each day. Therefore, any impact that we might have in making our country less reliant on oil has implications not only for the United States and our balance of trade and our security and our foreign oil dependence, but for the world.

Here in the United States, transportation accounts for two-thirds of our daily oil use, and most of that is due to the 230 million cars and light trucks on the road. President Bush laid out a vision in his 2003 State of the Union Address that "the first car driven by a child born today could be powered by hydrogen and pollution free."

Since that time, we have established an aggressive research program to overcome the cost and technology obstacles to affordable, practical hydrogen fuel cell vehicles. These obstacles include the challenges of hydrogen production, distribution and storage, including storage aboard the vehicle.

We are also working to lower fuel cell costs while improving durability and performance, and we are doing so in partnership with the private sector. Some have characterized our efforts towards hydrogen fuel cell vehicles as an abandonment of other automotive technology work. This is not the case. Allow me to explain.

The hydrogen fuel cell vehicle of 2020 shares many of the same components of the hybrid vehicles of today, electric drive, power

electronics, advanced lightweight materials, and even the batteries that are crucial systems in hybrid vehicles are also likely to play important roles in the fuel cell vehicles of the future. Therefore, we have very robust programs to advance hybrid systems, energy storage, power electronics and advanced materials that are making technological contributions to the hybrid gasoline vehicles of 2010 as well as the hydrogen fuel cell vehicles of 2020.

In addition to the work on technologies that I have mentioned, we are also doing a great deal of work on advanced combustion engines and fuels, including light duty diesels that will never find their way into a hydrogen fuel cell vehicle. It is important to note that these component technologies can be brought together in different ways to meet consumer demands while reducing petroleum use.

As an example, our work on batteries, electric drive, power electronics, renewable fuels and advanced internal combustion engines contribute to the potential of plug-in hybrid vehicles that could conceivably use a high percentage of blended renewable fuels if consumer tastes and markets take us in that direction. In other words, our portfolio will advance component technologies that can make significant contributions in the near term, mid-term and long-term.

How successful can we be with our portfolio of automotive technologies? Some insights can be gained by two different scenarios outlined by the National Academy of Sciences 2004 report on the hydrogen economy.

The chart that I have here illustrates these two scenarios against business as usual in this chart, which is identified as case A. In the business as usual case, as projected by DOE, oil use in light duty personal vehicles roughly doubles by 2050.

Case B in the chart assumes that hybrids will be successful, but that fuel cell vehicles will not. In this venue, the oil savings in 2025 are 3 million barrels a day rising to 6 million barrels a day in 2050. While oil use for light duty transportation levels in the near term, it will resume its rise after 2035 or so.

Case C in that chart illustrates why we believe getting to hydrogen is so important over the long term. Based on what we know today, this approach has the greatest potential to drive oil use in personal transportation to zero. Of course, we don't intend these scenarios to be predictions of the future, but rather a way to think about what we can and should do to reduce our dependence on foreign oil.

Finally, Mr. Chairman, let me stress the importance of partnership, not only with the automotive companies represented here today, but with the energy providers of today and the future. One of the most important accomplishments of this administration has been the creation of the FreedomCAR and Fuel partnership comprised of major automotive manufacturers, as well as the energy providers of today's fuels and tomorrow's hydrogen. Vehicle technologies, fuels and refueling infrastructure cannot be developed in isolation from one another, which is a reality that we are fully cognizant of.

With that, Mr. Chairman, I would be pleased to stop and answer any questions that you or this Committee may have either today or in the future.

[The prepared statement together with chart entitled “???” of Hon. David K. Garman appear in the Submissions for the Record on page 38.]

**Representative Saxton.** Well, thank you very much, Mr. Garman, for your statement. I am interested in your chart. I notice that you are fairly optimistic, over the long-term, of finding other means of power that we can use for our transportation needs. Regarding the hybrid technology that exists today, would you say that it is a mature type of technology or is it something that we need to continue to develop?

**Mr. Garman.** We need to continue to improve the technology, just to cite an example. The type of battery used in today’s hybrid is a nickel hydride battery. We can improve performance of hybrid vehicles if we are successful in moving to a more expensive but lighter weight technology, a lithium ion battery that on an energy-to-weight ratio could both reduce the weight of the vehicle but provide a lot more energy and contribution to the drive.

There are a couple of issues we have to overcome. Chief among them is cost. Lithium ion batteries are still comparatively expensive compared to nickel hydride batteries. We have a technology program in partnership which is focused on bringing down the cost and improving the performance of that battery. That, again, is one of those examples of a technology that would not only be used in a hybrid vehicle, but could conceivably be used in a fuel cell vehicle in the future.

**Representative Saxton.** Now, you have also made reference to the longer term here with regard to hybrid electric and fuel cell vehicles kicking in, perhaps, a decade from now?

**Mr. Garman.** Our expectation—of course, hybrid electric vehicles are in the market today, and I have been privileged to buy a couple of them myself. I think they work terrific, and I think they will get better.

Mrs. Maloney raises a very important question about the trade-offs inherent. Hybrid technology can be used not only to improve fuel economy, but to improve performance. It will be interesting to see how consumer demands will evolve and what manufacturers will be offering in this regard.

But over the longer term, we see the transition to hydrogen fuel-cell vehicles as very, very important, because that is the only thing that reverses and ends our dependence on petroleum for light duty transportation. We envision that if we are successful in overcoming the technology targets as we understand them today, we could get to a commercialization decision in 2015.

Let me point out that I think that nearly every attempt we have made in the past at pushing alternative fuel vehicles on the public have not been successful. We will be successful when we are able to offer a vehicle that consumers want to buy and drive. That is something that we are keeping very much in mind as we go ahead.

There has to be a business case to offer these vehicles. We have to overcome the technology obstacles, and we are hoping that around 2015 a commercialization decision can be made by industry where they say we have the technology and the technology is at a cost where we can make the business case for both the vehicles and the infrastructure in the marketplace. Because these can be very

exciting vehicles that consumers will want to buy and drive. If we are successful that the technology and business case can be made, one would hope that government incentives to push the technologies in the marketplace will not be as expensive as they might otherwise be.

**Representative Saxton.** Mr. Garman, I think this is a great goal for the long term. Let us talk short term for just a moment. It is my understanding that there is a technology available that is generally referred to as flexible fuel, vehicles which combine a mixture of gasoline and alcohol or gasoline.

We generally talk about alcohol that is made from organic material. I noted you don't show the use of flexible fuel vehicles, at least on your chart. I am wondering if there is a reason for that. It seems to me that if technology is available today, there are some things that we need to do perhaps to make it feasible to use it in terms of supplying, creating a supply line for fuel for flexible fuel vehicles. Could you talk about that a little bit?

**Mr. Garman.** Sure, absolutely. First of all, I think it is important to make the observation that manufacturers are offering in the marketplace today literally hundreds of thousands of flex fuel vehicles. Those are available. Some consumers are buying them without even knowing it. They are out there. I believe that every manufacturer produces them and some of the manufacturers can talk to the specific models and numbers.

The interesting question is, is the fuel available for those flex fuel vehicles. Most flexible fuel vehicles, I can tell you, that are driven and used in the Federal Government, where we have requirements for purchases of flexible fuel vehicles, many of them are not being fueled with renewable fuels, which is the goal after all. Part of that is being addressed, we believe, in the energy bill that will come before the House, I believe, today in the conference report with an increased mandate in the production of ethanol. Ethanol is, of course, the component, the E85, or 85 percent ethanol fuel blend that flexible fuel vehicles use. So part of it is not only having the vehicles available, but having the fuel available.

As you pointed out in your statement, the manufacturers are getting quite good at lowering the cost differential between a flexible fuel vehicle and a conventional vehicle. In fact, some of the manufacturers are actually getting to the point where instead of using a sensor in the vehicle to determine when flexible fuel is being used, they are actually using computer algorithms so that no hardware is actually needed and they can basically offer a flexible fuel vehicle at no additional cost. That is, I think, an important breakthrough.

But we also have to get more fuel in the market, and that gets us to the limits of ethanol and corn-based ethanol and how much corn-based ethanol can we make. There is a mandate in the energy bill which helps. It would bring us from about 4 gallons a year to 7.5 gallons a year in 2012. But compare that with the reality that we use about 135 gallons of gasoline each year. So it will still be a relatively small amount. If we want to move beyond corn-based ethanol to actually produce a lot more ethanol than we can from corn, we have to develop a breakthrough in what we call cellulosic ethanol, ethanol that is made from agricultural residues, clippings,

certain kinds of organic wastes, a wider variety of feedstock than what we use to make ethanol today.

Unfortunately, our cost of producing that ethanol today is around \$2.75 a gallon. We think we could make a lot of it, perhaps up to 60 million—I am sorry, billion gallons a year, which would make an appreciable impact on our oil dependency. But no one is going to buy it at that price. That is untaxed. So we have to do a better job and continue to work. We at the Department are spending on the order of about \$70 million a year just on this problem of producing more cellulosic ethanol so that we can fuel increasing numbers of flexible fuel vehicles that are coming into the market.

**Representative Saxton.** I notice that you refrained from mentioning the actual names on the vehicles that they consider flex fuel vehicles.

**Mr. Garman.** Only because I was afraid of leaving some out.

**Representative Saxton.** I understand. One of the reasons we have public hearings though is to let the public know what actually exists. So I would like to try to do that a little bit with regard to some of the vehicles that are available today.

I notice that we have representatives from DaimlerChrysler here today. We have representatives from Ford Motor Company. We have representatives from Toyota here today. I know that there are also General Motors vehicles that are considered flex fuel vehicles.

Let us just run down the list of some of these, because they are going to be very familiar and the public is going to be surprised when they hear, for example, that a Ford Taurus is a flex fuel vehicle.

**Mr. Garman.** That is right.

**Representative Saxton.** And that a Chevrolet Suburban is a flex fuel vehicle, or in some cases are.

Could you please just list common-day cars that people drive that are flex fuel vehicles?

**Mr. Garman.** The Dodge Sebring. A complete list can be found on the website, fueleconomy.org that is maintained by the Department of Energy—

**Representative Saxton.** You are still being too careful.

**Mr. Garman.** That is because, again, Ford, Chevrolet, DaimlerChrysler, most of the major motor companies offer a wide variety of flex fuel vehicles in a number of different classes. I would almost be at the point of guaranteeing that almost any type of car that you want to buy has a flexible fuel offering in that class. There are that many vehicles out there.

**Representative Saxton.** Every day, if we went out on Independence Avenue and stood there and watched cars go by, what percentage of them would be capable of burning flexible fuels?

**Mr. Garman.** I would have to provide that for the record. I can tell you that I came to this hearing in a flex fuel vehicle. They are out there. They are numerous. As I said, some consumers are actually driving them without knowing it.

[The information requested appears in the Submissions for the Record on page 63.]

**Representative Saxton.** Is a Sable a flex fuel vehicle?

**Mr. Garman.** I believe it is, but I would have to check my website to be sure.



**Representative Saxton.** Yes, all right. I just want to make this point for my friends on the panel here and for the public that flex fuel vehicles are out there. And you can burn up to 85 percent alcohol, mixed with gasoline, in those cars.

Now, you talked about our energy bill that is going to require, mandate the production at a certain level. That doesn't go to solve the whole problem from what I understand it. It has to be delivered, it has to be pumped. It has to be available to put in the car, the flex fuel vehicle, and a distribution system is another part of the problem, isn't it? Would you talk about that a little bit?

**Mr. Garman.** That is correct. I think it is fair to say that if you were a consumer with a flexible fuel vehicle—I know there is a station in Lanham, Maryland. I know there is a station at the Pentagon. I know there is a station at the Navy Yard, but I am hard pressed to think of many more stations that are offering E85 in this immediate area. That is one of the problems.

**Representative Saxton.** E85 is?

**Mr. Garman.** Eighty-five percent ethanol.

**Representative Saxton.** Eighty-five percent ethanol and——

**Mr. Garman.** 15 percent gasoline.

**Representative Saxton** [continuing]. Fifteen percent gasoline.

**Mr. Garman.** Correct.

**Representative Saxton.** You have to have special pumps as part of the distribution system, right?

**Mr. Garman.** Not a special pump but a dedicated tank.

**Representative Saxton.** Because it has to be cleaner?

**Mr. Garman.** Right, ethanol and alcohol have an affinity for water. So it is a little bit more difficult to move it through a conventional petroleum pipeline than certain other kinds of petroleum products that don't have that affinity for water.

**Representative Saxton.** For economic reasons, I suspect, gasoline filling stations have been reluctant to convert and dedicate a pump to E85, right?

**Mr. Garman.** Many have, yes. It is an added investment without an assurance that that supply of ethanol is going to be there for them.

**Representative Saxton.** I am going to say that I have spent a fair amount of time working on this in the last couple of months. In fact, Joni Zielinski, sitting in the back of the room, my staffer, has done great yeoman's work in making me able to ask the questions that I have asked today.

We have actually introduced some legislation which does a number of things. It recognizes that flexible fuel vehicles are available. It also recognizes that we are neither producing nor able to distribute E85 to the extent that we could to make it a viable fuel today.

So our legislation provides a tax deduction of up to \$100,000, which currently exists, and it says within 5 years—now, this is Draconian, but it gets people's attention—within 5 years any filling station with, I believe it is 8 pumps or more, would have to dedicate one of them to E85, and the government would be willing to help pay for that with this tax deduction situation.

So I hope we can make your chart look even more optimistic than it is in the short term by taking advantage of technology that al-

ready exists that we are not able to use because we are not able to produce ethanol to the extent that we should or distribute it in an efficient way. We really need to get on that, and that will help us bridge these new technologies that you are talking about. At least that is my opinion.

Mrs. Maloney, it is your turn.

**Representative Maloney.** Thank you for calling the hearing, I feel we are becoming—that becoming more fuel independent as a nation is a top priority of our economic strategy as a nation. I will take a serious look at your bill. I just have one question of the Chairman. Who gets the 100,000 deduction? Is it the filling station or the car producer? Who gets the deduction?

**Representative Saxton.** In this case it is the filling station owner.

**Representative Maloney.** I will take a look at it. Thank you for being here and talking to us about this really important issue. You mentioned the President's vision that he spoke about in his address in 2003 to move to hydrogen fuel engines and pollution free.

My question is where did this vision come from? Was this something that was plucked out of the air, was it pure vision or was it based on solid research, that this was the area we should be focusing on and going to? Are we now scrambling to just put flesh and bones on that vision, or how developed was it with the scientific community behind it?

**Mr. Garman.** I can tell you, as someone who is intimately involved with the development of this initiative, this was not one of those ideas that was thought up on the way to the podium at the State of the Union Address. This was undergirded with analytical work in my office and in other places, that preceded the State of the Union by more than a year.

**Representative Maloney.** How would you respond to some of the critics of the President's hydrogen initiative who suggest that its real purpose was to divert attention and forestall efforts to raise CAFE standards? I cite, really, and I would like to put in the record an article that appeared today on EPA Holds Back Report on Car Fuel Efficiency.

Holding back the report itself is newsworthy, but the contents of it showed that the loopholes—and I am quoting from it directly—in the American fuel economy regulations have allowed auto makers to produce cars and trucks that are significantly less fuel efficient on average than they were in the late 1980s.

In other words, we are going in the wrong direction. Your comment on—I mean, these are not—these are criticisms that have been well published, editorialized and so forth, that it was really to forestall raising CAFE standards.

**Mr. Garman.** Sure, let me make a couple of points. First of all, this administration did increase CAFE standards on light trucks. We did so—it was the first increase in CAFE standards since the 1996 model year, and it was the largest increase in CAFE standards in 20 years. So the Administration has increased CAFE standards on light trucks.

**Representative Maloney.** Yet the report says that—let us take trucks out of it. Cars, that the cars are now less fuel efficient on

average than they were in the late 1980s. That is an astonishing report coming out of our government, EPA.

**Mr. Garman.** Yet, they are meeting the legislated statutory fuel efficiency standard for automobiles, which if memory serves is 27—

**Representative Maloney.** That is the point. The point is the legislative statute has allowed loopholes and has not upheld higher fuel efficiency standards. That is what it is saying.

I just would like to ask some questions about the hybrid cars. As I mentioned earlier, my sister-in-law has a hybrid car. She says she sold 10 of them just from people coming up and asking her about her hybrid car finding out it is fuel efficient and really as citizens wanting to be a part of conserving our energy.

She tells me that there is a waiting list. I am not going to tell you the company. It is an American company. There is a 3-year waiting list just to get one of these cars. If this is the stated policy, the Chairman supports it, that most Americans should get hybrid cars, then why can't we get them produced and out on the market?

Other people tell me that the foreign countries are producing these hybrid cars. A lot of Americans are buying from the foreign country—foreign cars because they can't get them from the American manufacturers. My question is why aren't we moving with full speed, instead of cars that consume more and more gasoline, moving towards the hybrids.

I have had this conversation with Mr. Dingell, who is very supportive of the American automobile industry. Why aren't they moving to produce these hybrid cars at a faster rate? The foreign industries are just going to undercut us because the American people want it. They will even pay more. They will pay even substantially more to get a hybrid car.

**Mr. Garman.** I would make the following points. First of all, we are very much encouraging the purchase of hybrid vehicles. The President, in 2001—

**Representative Maloney.** Everyone is encouraging them. Why are they not producing them?

**Mr. Garman** [continuing]. Offered a tax incentive for the purchase of hybrid vehicles. The question as to why aren't manufacturers producing more of them or offering more of them is a question I respectfully submit you might want to ask the manufacturers, and you have that opportunity in a minute.

**Representative Maloney.** I am sure we will hear from the other panel, but I am sure you have discussions with them every day. I would like your own perspective.

**Mr. Garman.** My only perception is that hybrid vehicles are relatively new. Folks are figuring out the market. Is this an—and very few numbers have actually been bought. The question is, who has been buying the vehicles? Are they just early technology adopters who just like the hybrid vehicle concept or are they everyday Americans who are making a direct economic choice? Is this a flash in the pan, or is this going to be a sustained demand for this new technology?

Most hybrid vehicles, the extra additional cost for the components in the hybrid vehicles, cannot be repaid with gas savings over the normal 5-year ownership of the vehicle. So some will say that the purchase of a hybrid vehicle is not an economically ration-

al choice for a consumer. Yet consumers are buying them anyway. I think the manufacturers are trying to understand the market and look at the market and trying to—of course, they are only successful if they meet consumer tastes and demands.

If this consumer taste and demand is something that is real and sustained, I am certain that the manufacturers—not only from foreign-based auto companies but U.S.-based auto companies—will fill that demand if that demand is real and sustained. We want to help, as you do, because there is a public benefit.

**Representative Maloney.** People that I know that are buying them are making an environmental choice. They want our country to be more energy independent. They will pay more money to be part of that. But what I am hearing is they cannot even buy them. They are not even out there for them to buy.

I would like to ask, what was the process for deciding that hydrogen vehicles should get the attention, and how does that affect the ability to fund other worthwhile investments in achieving greater energy efficiency? I think this is really important. I think we all share the goal of moving to greater energy efficiency.

In fact, many of my constituents are concerned that maybe we are in Iraq—now that they find out we are not finding weapons of mass destruction—for the reason—I don't believe it—but for oil. There is a huge concern about the American public, and I hear it every day from my constituents.

Why aren't we moving more, like we are with the ethanol, as the Chairman said, to be more energy efficient? But how does that—in other words, how does the trade-off between hydrogen vehicles and having the money and the technology and the research dollars to go after other windmills of efficiency or other ways we could approach it?

**Mr. Garman.** Thank you for that question. That is a great question. The first part of it, why hydrogen, is answered in the following way. As you look at that chart, hydrogen is the only method that we foresee that over the long term actually gets personal transportation out of the oil business, out of the geopolitical implications of oil, out of the environmental impact of oil, over the long term.

Hydrogen is a common fuel that can be produced from a variety of domestic resources we have right here in the United States. You can make hydrogen from wind power, you can make hydrogen from solar power, you can make it from nuclear power. You can make it from natural gas. You can make it from coal if you sequester the carbon dioxide.

We have lots of choices of making carbon-free hydrogen for a common fuel. That kind of flexibility we don't have with any other fuel. So that is the short answer to why hydrogen. It was the only thing that could get us completely off of oil, and it was something that gave us the flexibility to make that fuel a variety of different ways.

Now as to the question—which I take the question to mean, are we putting all of our eggs in the hydrogen basket? Are we spending too much on hydrogen to the detriment of other technologies that can make a contribution in the near term? I would argue that the answer is no. Based on the President's budget submissions in the

last 3 fiscal years, you have seen our requests for funding for some of the nearer-term technologies, hybrid vehicles, batteries, energy storage, power electronics, some of these things that can advance internal combustion, some of these things that can make contributions in the near term have been going up, not down.

So we haven't been stealing the dollars from the near term to pay for the long term. Our dollars focused on the oil problem. Vehicle technologies R&D have been on an upward trend, not a downward trend. So that is how I would respond.

**Representative Maloney.** Thank you. There are many other panelists with questions. Thank you.

**Mr. Garman.** Thank you.

**Representative Saxton.** Thank you, Mrs. Maloney.  
Mr. McCotter.

**STATEMENT OF HON. THADDEUS G. McCOTTER,  
A U.S. REPRESENTATIVE FROM MICHIGAN**

**Representative McCotter.** Thank you, Mr. Chairman. I get asked the Iraq question too. Our reliance on foreign fuels, has that driven us to Iraq? Are we there to go take Iraq's oil? The response that I generally find helpful is the fact that if we were there to steal it we wouldn't be paying for it. So I don't think we are there for the oil itself. We would have taken it by now.

Secondly, I come from Detroit. I am graced to have the champion of the auto industry, Congressman Dingell, as my neighbor to the South. One of the things that I think he and I agree on is that the auto industry is not in the robust health that it was in earlier days. A lot of that has to do with the erosion of the North American market for the Big Three.

One of the problems that led to that is it made some missteps in the marketplace. So we have to go back to the concept that while we may think that it would be nice for the Big Three to drive market demand, the reality in a free marketplace is that supply follows demand. While we may have a new development where people are making decisions on cars no longer on a cost-benefit basis but being able to have the economic luxury of adding something like an environmental consideration or a political consideration to their purchase of a vehicle, it is very difficult for the Big Three at this point in time to increase production and guess wrong again. That would not only cut into profits, that would cut into the number of jobs, which are becoming more and more scarce within our manufacturing industry every day.

So my question would be—as we hear about 2015 and others, we hear about the past attempts to use incentives and perhaps the new rationale people are using to buy cars as a result of some of the incentives the legislation has put before consumers to look at alternative fuels.

My question is, is it not so much of a forest that we miss it? One of the greatest market demands we are going to have, and continue to have, to drive the demand for these alternative fuels is staring us in the face every time we fill up our gas tank.

The Unocal situation shows the national security interest of oil to the United States, but it also shows its scarcity. It shows that India, China and other developing nations are going to continue to

put a continued strain on our oil supply even in the best situations of international comity.

At this point in time, given the rising demands in the newly developing world and the prospect that the unstable situation in the Middle East will continue, what is the likelihood that the time line of having to make this decision on the Big Three's part or on our part as the government is going to be hastened?

**Mr. Garman.** That is a very complicated question.

**Representative McCotter.** That is what I get paid to do. I don't have to answer them. I just ask them.

**Mr. Garman.** Oil analysts have many different answers to this question. There is one prevailing point of view held by thinkers such as Matt Simmons and others that we are at a point of reaching scarcity in recoverable hydrocarbons that even a tiny under-performance of a Saudi field, where, as the Chairman has pointed out, this production, excess production capacity exists, could have serious implications for the market, prices could rise. Yes, folks could be looking around more quickly than they otherwise would for alternatives.

There is another point of view held by the Department of Energy's own Energy Information Administration which is an independent statistical agency that is not beholden to the political leadership. They take the view that there is lots of oil and that there will be on the order of 3 trillion barrels producible between now and 2025 and that this is not a problem. I don't know where the truth is.

I think that if I did, if I could predict the future with certainty, I would just suggest I might not be in this job, I would be somewhere else. But I don't think anyone can predict the future with certainty. So I look at it as our job at the Department of Energy to partner with the private sector to give us options, a wide variety of technology options that can be brought into play when market circumstances warrant and when consumers are asking for it.

Your point is extremely well taken that—and if my reading of recent market trends and purchases of vehicles is correct, consumers are responding to the price signal that they are getting at the pump and are looking to buy more fuel efficient vehicles, not necessarily because they are early technology adopters or not because they are driven by their environmental point of view, but because their pocketbook says it is the smart thing to do. So your point is extremely well taken.

**Representative McCotter.** Well, that is my concern because I don't think Representative Maloney's constituents have an aberration, an ephemeral aberration. And I think that this is going to continue, and that the gas prices are going to stay at a relatively high level and continue to climb. Because you want to talk 2025—that to me is not a long time, I still won't even be eligible for Social Security at that point, if it is there.

So my concern is that we don't want to be, as a government, doing anything that is, A, going to hinder the American producers of cars from being able to meet that demand, because there could be a spike in that or a very sharp rise in the demand for these cars that we cannot meet, that the fuel cannot meet.

Even with the scenario of 2025—and I assumed that most of the people who came up with that analysis at the Department probably take the Metro to work. At the end of the day, I don't see the demand for oil going down. So even assume target traffic 2025, I can see the demand going up, up, up, up.

I can also foresee the time when political currents will break in and cause problems with the market analysis that people have. My favorite example is when FDR slapped an oil embargo on the Japanese that was designed to bring them to their knees. That brought them to Pearl Harbor.

So over time, I don't know how the cost of gas is ever going to get back down necessarily to where it was. If there is a continued steeper rise or a precipitous spike at some point, the demand for these cars is going to shoot through the roof, and we will not have the ability to meet that demand, and that is going to be a grave concern. But thank you.

**Representative Saxton.** Thank you, Mr. McCotter.  
Mr. Hinchey.

**STATEMENT OF HON. MAURICE D. HINCHEY,  
A U.S. REPRESENTATIVE FROM NEW YORK**

**Representative Hinchey.** Thank you very much, Mr. Chairman, and I thank you for holding this hearing. It is a fascinating subject. We appreciate the opportunity to take part in it.

I think my colleague makes some very good points and your argument, not your argument, but the argument of others about the fact that there is plenty of oil in the world flies, of course, in the face of the market forces because we see a demand going up and the price going up very, very rapidly.

I think he is absolutely right about increasing demand and we can see that particularly in places like China. And I understand that where you have 1 billion people in each of those countries, demand is going to go up and consequently the price of the product will go through the roof. But what troubles me, frankly, is we are not doing an awful lot to deal with it in this country.

We have abandoned all of our energy conservation policies which were put in place in the second half of the decade of the 1970s. We abandoned them in 1981 and we essentially haven't done anything to try to bring them back or to try to deal with the problem in an intelligent way since then. The issue of ethanol is fascinating.

Can you tell me, Mr. Garman, how much oil or other fossil fuels it would require to produce a gallon of ethanol?

**Mr. Garman.** I can. I recently had a report from the Argonne National Laboratory that said—and I will, of course, provide the complete information for the record—but as memory serves, and this is contrary to a recently publicized report from a Cornell researcher, but that the Argonne study found that ethanol yielded more energy than the fossil fuel inputs required to produce it. That for every million BTUs of ethanol produced, 750,000, roughly, BTUs, of fossil energy was used to produce it. So it is a winner. Ethanol is a winner, is the short answer.

And the information that I will be happy to provide for the Committee will show you the various studies that have been done over the years and the various energy balance points that those studies

came to. We find that most of the studies that are done find that ethanol is a winner.

A researcher from Cornell finds that it is not a winner, and it all depends on the assumptions used in driving the study and some of this information is contained in the information that I will provide to the Committee.

[The information requested appears in the Submissions for the Record on page 63.]

**Representative Hinchey.** That is an Argonne study. Could you tell us a little bit more about it now so that we could pick it up quickly?

**Mr. Garman.** Sure. Argonne National Lab looked at all the primary fossil fuel inputs that go into making a bushel of corn and transporting that corn. I am including the fertilizer inputs to the soil, the tractor in the planting, the harvesting of that corn, carrying that corn to the plant, producing the ethanol—the entire, if you will, value chain of the ethanol production.

**Representative Hinchey.** No, I understand what you are saying, but that is the first I have heard that. Because every study I have seen, including the one from Cornell, shows that it takes about a third more—and some studies have shown even more than that—a third more of fossil fuels or other energy to produce a gallon of ethanol.

A recent release from the Department of Energy shows that a gallon of ethanol contains only about two-thirds of the energy that a gallon of gasoline does.

So if the other studies—not the Argonne study, but I will look at that very carefully—but if all the other studies that have come out on this, including the Cornell study, are right—and your recent revelation about the fact that ethanol contains only about two-thirds of the energy of a gallon of gasoline, then it seems that we are putting our money in the wrong place. I don't think at this stage you can responsibly say it is a winner, because the information is at best conflicting.

**Mr. Garman.** Actually, believe me, Congressman, you and I have a great history on the Appropriations Committee. I don't mean to be argumentative.

**Representative Hinchey.** I do.

**Mr. Garman.** The information that I will provide the Committee will show that the bulk of the studies, not the minority of the studies, but the majority of the studies show that ethanol is a winner, not a loser, in terms of energy balance.

**Representative Hinchey.** Thanks. I am very interested in this. It is critical because so much attention is being paid to that. Now so much money has been put into the energy bill which we will be dealing with later tonight on the floor of the House, into ethanol, and I want to look at that study before that bill comes up for a vote tonight.

**Mr. Garman.** We will get it to you this afternoon.

**Representative Hinchey.** The issue of CAFE standards is also very critical. We had a dramatic increase—not dramatic but a significant increase in CAFE standards back in the 1970s, which proved to be very efficient in reducing the amount of gasoline that is used for transportation. As I understand it, about 70 percent of



the gasoline that we use in this country is used for transportation, cars, automobiles and other forms of transportation.

Those CAFE standards reduced the gasoline usage very, very substantially, but we haven't done anything on it since then. But you just made the point a few moments ago that CAFE standards for light trucks, including SUVs, have gone up from 20.7 to 22.2 by the year 2007.

So 2 years from now, we will increase the CAFE standards for light trucks and SUVs by 1.5 miles per gallon, which is an increase. I don't want to denigrate it, but it is an awful lot less than we could be doing and should be doing.

If we were serious about trying to reduce our dependence on foreign oil, we would be doing an awful lot more than that. Sixty percent of the oil that we use in this country now is imported, but that number is going to significantly increase in the years ahead.

This is one of the basic elements of national security, which is not being addressed in that context. I just wish that the administration and this Congress would focus their attention on this issue much more than we have.

**Mr. Garman.** I would—the National Highway Transportation Safety Administration, which promulgates corporate average fuel economy standards, in my understanding, is planning to shortly put out for public comment their new CAFE standard proposal for light trucks commencing in the year 2008 for public comment. We will be able to see what they are proposing and how they are looking to increase and improve the efficiency of the light truck market.

**Mr. Garman.** We think the light truck market is key, because, frankly, we didn't have light trucks in this country outside of a very small number used in farms and light industry until CAFE standards were adopted. Folks used station wagons. And ironically—

**Representative Hinchey.** I think you need to be very careful about that, establishing a causal relationship between the purchase of pickup trucks and the establishment of CAFE standards puts you on a very weak footing.

**Mr. Garman.** I will say, and I would agree that that correlation does not necessarily mean causation. You are absolutely right, Congressman. But nevertheless, the sport utility vehicle market did not exist. And somebody with a family of five, such as mine, have a tougher time looking for the right kind of car, you know—I don't have a lot of station wagons to choose from. Thankfully, some more are now coming into the marketplace that aren't light trucks. And if you look—I guess my point, the interesting point is most of the petroleum use in the light-duty transportation sector has come from light trucks. SUVs, vans, cars are relatively flat. And if we can, if we can do something about the light truck sector, then that would be substantial. And that is why we have been focused on the light truck sector for corporate average fuel economic ruling.

**Representative Hinchey.** Well, raising it by a gallon and a half in the next 2 years, after the next 2 years, is unquestionably a step in the right direction. But it is an awful small baby step in the right direction.

Let me ask you a question about buses and mass transit, because this is something that I think is very important, it gives us an opportunity to do something constructive.

We have been looking at this and we see that over 1,000 heavy duty urban transit buses have been sold in the United States and Canada as of July of this month. And there is a movement going on towards hybrid propulsion to power these vehicles that are used in metropolitan areas. And our information is that we could see an awful lot of reduction in fuel consumption through the use of these vehicles if these statistics are correct.

Is there anything within the Energy Department now that is focusing attention on mass transit, on these forms of hybrid buses, for example, in urban areas and also across the country?

**Mr. Garman.** The heavy bus work is generally done in the Department of Transportation. I honestly don't know the history of that. The focus of the Department of Energy has generally been light duty vehicles. The focus of the Department of Transportation research and development has been heavy duty vehicles.

I would say that the hybrid bus program that you mentioned appears to be fabulously successful and have a terrific impact. The early reports that I am hearing from fleets that have gone in this direction have been very favorable, not only in terms of fuel performance they are getting, but lower maintenance costs, higher availability, a whole host of reasons for transit authorities across the country to look very, very seriously at these new bus offerings.

And I just commend the companies and others who have been involved in bringing these to the marketplace for doing that, because I think it can make an important contribution.

In terms of the aggregate amount of oil we use, it is relatively small, but every bit helps, as you point out.

**Representative Hinchey.** Yes. And you can make a big contribution, I think. In New York City, for example, there are 4,500 buses just operating within New York City. And if you translate that to places like Los Angeles and Chicago and other places across the country, that number goes up significantly. So I am very happy to hear you say that.

**Mr. Garman.** And one other point for everyone's benefit, not only is there a fuel economy benefit, but, of course, an air quality benefit as well.

**Representative Hinchey.** Yes. Absolutely, I thank you very much, sir.

**Representative Saxton.** Thank you and we are going to move to our next panel. And on the way there, I am just going to emphasize something that my friend, Mr. Hinchey, said. He talked a little bit about the national security implications of this petroleum situation. I am not an expert on these matters. But I am told that OPEC countries are sitting on 70 percent of the oil reserves that exist in the world, and that non-OPEC countries are therefore sitting on 30 percent of the reserve.

I would make the case that through an intentional process, the OPEC countries today, with 70 percent of the oil reserves, are producing 40 percent of what the world uses, and non-OPEC countries, with 30 percent of the reserves produce 60 percent of what the world uses. This is a very troubling set of statistics because it ap-

pears that our friends in the OPEC countries who obviously think differently than we do on a number of issues have artificially controlled the price of petroleum and are one of the root causes of where we find ourselves—along with demand, the growth in the economies in places like China, which also has certainly contributed.

But when we see the countries that control 70 percent of the oil reserves producing 40 percent of what we use, this to me, is a big red flag that has been run up the flag pole and we need to be very conscious of this, and we need to take steps to mitigate this and to become energy independent.

**Representative Hinchey.** Thank you for that conclusion, Mr. Chairman. We should perhaps stop holding hands with the King of Saudi Arabia.

**Representative Saxton.** I would suggest you may be right. And unfortunately, we are wedded to him by petroleum at this point. So this is an important subject.

Mr. Garman, thank you very much for being with us. We really appreciate your attendance and the information that you have brought us this morning. And we look forward to working with you on this subject as we move forward.

**Mr. Garman.** Thank you, Mr. Chairman.

**Representative Saxton.** We are now going to move on to our second panel. I would like to welcome Mark Chernoby, who is the vice-president of Advanced Vehicle Engineering at DaimlerChrysler corporation; Mary Ann Wright, director of Sustainable Mobility Technologies and Hybrid Programs from Ford Motor Company; and Tom Stricker, national manager of Technology and Regulatory Affairs, Toyota Motor company of North America.

**Representative Saxton.** Also, Mr. Loper, you're from—

**Mr. Loper.** I am from the Alliance to Save Energy and I will give more introduction.

**Representative Saxton.** Very good. We will start with you then, Mr. Loper, if that is all right. And we will go from left to right across and then we will have questions for you.

**STATEMENT OF JOE LOPER, VICE PRESIDENT,  
ALLIANCE TO SAVE ENERGY**

**Mr. Loper.** Thank you Mr. Chairman. I am Joe Loper, vice president of the Alliance to Save Energy. I appreciate the opportunity to speak with you today. The Alliance to Save Energy is a bipartisan, nonprofit coalition of more than 90 business government and consumer leaders. Our mission is to promote energy efficiency worldwide to achieve a healthier economy, a cleaner environment, and greater energy security.

We were founded in 1977 by Senators Charles Percy and Hubert Humphrey, and currently enjoy the leadership of Senator Byron Dorgan as Chairman, amongst many other distinguished Members of the Congress.

Attached for the record are lists of the Alliance's board of directors and its associate members. For the last 4 years, Congress and the President and groups like ours have spent innumerable hours trying to agree on ways to address the Nation's dependency on oil and its adverse impacts on climate and air and water quality.

There has been much discussion about how to ease the burdens on States and cities trying to meet Clean Air Act requirements and who is going to pay for leaks from underground storage tanks.

Congress has even debated several measures to reduce greenhouse gas emissions. Meanwhile we have watched oil prices climb from \$30 to \$60 per barrel, as oil supplies get rocked almost daily by events that are largely out of our control. These range from Venezuelan uprisings to hurricanes in the gulf of Mexico, to the growing demand for oil in China.

With less than 2 percent of the proven oil reserves within our borders, we have limited control over our oil supplies and prices. We can, however, control our demand for oil. That makes this hearing particularly important. Given that the transportation sector accounts for two thirds of U.S. oil use and that passenger cars and light trucks consume 40 percent of that oil use, it is critical that we address vehicle fuel use.

We applaud the efforts of Congress to address the Nation's energy challenges in the current conference energy bill. The tax incentives for hybrid and advanced diesel vehicles, along with technology, research and demonstration programs are certainly useful. However, we cannot pretend to think that the bill before Congress will have any significant impact on U.S. petroleum use.

In fact, when it came to addressing energy use in vehicles, Congress flat out missed the onramp. Most, if not all, of the oil savings in the conference energy bill will be cancelled out by the increased energy use resulting from extension of the corporate average fuel economy credit for dual-fuel vehicles. This provision, as many of you are familiar with, will allow vehicle manufacturers to take credit for vehicles that are capable of, but almost never do, run on alternative fuels.

As Mr. Garman noted earlier, many consumers are buying alternative fuel vehicles without even knowing it. And if a large percentage of the vehicles are already capable—alt-fuel capable—then one has to ask the question whether we need government incentives to encourage more. It seems to us that incentives to develop the infrastructure, as proposed in the Chairman's bill, would make far more sense.

There is no shortage of technologies to improve vehicle fuel efficiency. Many of these technologies are already in the vehicles, in fact. And other technologies are being pulled off the shelf and increasingly deployed in new vehicles. They include variable cylinder management, hybrid drive trains, regenerative braking, and a host of other technologies that I won't inventory today.

These are not pie-in-the-sky technologies. They are not expensive gimmicks, but rather, they are technologies that are here now. On the horizon we have plug-in hybrids and hybrid and fuel cell vehicles which have also been mentioned.

But while advanced technologies have been incorporated into vehicles and will continue to be deployed in vehicles, we are not getting more miles per gallon as a result. In fact, the average fuel economy in miles per gallon of model year 2004 vehicles is 6 percent lower than in the 1987 to 1988 model years. Instead of getting better fuel economy, we are getting more towing capacity, we are

getting more acceleration, we are getting more weight, we are getting more space.

For example, America's best selling truck, the Ford F-150, claims almost 5 tons of towing capacity. That is enough capacity to pull a 36-foot horse trailer with 4 horses in it. The average passenger car sold today has about 185 horsepower, which is 40 percent more than a car sold 15 years ago. It is the same horsepower as a large Caterpillar bulldozer.

This decade looks like it could displace the 1960s as the decade of the muscle car. According to the classic car and vintage automobile registry, more than half of the fastest production car models offered since the 1960s have been offered since the year 2000. In other words, the number of production hot rods offered in the last 5 years exceeds the number offered in the last 4 decades.

Vehicle fuel economy is a huge reservoir of low-cost energy waiting to be tapped. According to EPA estimates, if automakers had applied the technology gains made since 1987 to improving fuel economy, average fuel economy would be 20 percent higher.

If the Nation had taken this path, we could be consuming between 1 and 2 million barrels per day less than we are. That is equivalent to the more optimistic estimates of the resources from the Arctic National Wildlife Refuge.

For the last 20 years, the Nation's oil policy has, in effect, been made in America's car showrooms. It is time for the Federal Government to provide more guidance in the vehicle marketplace. There are many policies that could be employed to ensure that at least a position of these advances get used to improve fuel economy. These policies are familiar, in fact, perhaps too familiar.

Between 1975 and 1985, fuel economy standards were used to help achieve a 70-percent improvement in new vehicle fuel economy. Since the mid-1980s, CAFE standards have been unchanged due to political pressure. The current standard of 27.5 miles per gallon for cars, for passenger cars, has been in place since 1985. The current 21-miles-per-gallon standard for light trucks is only 0.5 miles a gallon above the 1987 standard. To the extent that fuel economy standards are based on fuel economy levels that were achievable 2 decades ago, their effectiveness is seriously undermined.

There are some loopholes that also need to be addressed with the CAFE standards. Old testing methods for one: EIA estimates that the actual fuel economy of vehicles is about 20 percent lower than the CAFE standard test result suggests. In other words, a 27.5 miles-per-gallon CAFE standard is really equivalent to a 22 miles-per-gallon standard. Fuel economy testing methods should be revised to better reflect real world driving.

Fuel economy standards allow vehicles classified as trucks to meet less stringent standards than are imposed on passenger cars. When this loophole was created, less than 1 quarter of light duty vehicles sold were classified as trucks. Now, fully half the vehicles sold receive this special designation. Most of these trucks are sport utility vehicles and minivans that are primarily, if not exclusively, used for transporting passengers. As noted earlier by Mr. Garman, it is easier to put station wagons on truck chasses than to increase fuel economy under the current regime. This needs to be fixed.

Vehicle manufacturers, as I noted earlier, receive credit against their fuel economy requirements for sales of dual fuel vehicles that can run on either ethanol or gasoline. We would argue that this should be terminated, at least modified, to require that the vehicles are actually using the alternative fuels for which they are getting the credit.

Finally, large vehicles up to 10,000 pounds should be subject to the labeling and CAFE standards.

**Representative Saxton.** Mr. Loper, I am sorry. I have been informed that we are going to have a series of votes around 12 o'clock. And when we have a series of votes, it can take up to an hour, so I am going to ask you if you could summarize your statement so that we can move on to the other witnesses.

**Mr. Loper.** To summarize, Government and industry have made great strides in developing technologies that can improve the fuel efficiency of the transportation sector. Many of these technologies are not, however, being widely used to improve the fuel economy of today's vehicle fleet, instead they are being used to increase overall vehicle acceleration and power and size.

Without government policy interventions, the next 20 years could be just like the last with fuel economy being sacrificed to increase acceleration, horsepower, weight and size. By widely using the tax code and increasing and reforming CAFE standards, we could begin to see improvements in the fuel economy of vehicles.

Despite the arguments of the auto industry, these policies would not deny consumer choice. These policies would simply change the relative price of various vehicle amenities. They would make increased fuel economy less expensive and would make hot rods and large tow vehicles more expensive. They would make people think about how much car or truck they really need. They would encourage manufacturers to make more vehicles with better fuel economy available to consumers, and then market them.

Improving fuel economy is not a technical challenge. The technologies are here. Rather, it is a matter of political priority and will. With the Nation continuing to rely on imported oil from volatile regions of the world and concerns about the impact of oil use on the environment quality and climate, it is increasingly imperative that our Nation translate more of our technical advances into improvements in fuel economy. I appreciate the opportunity to speak with you.

**Representative Saxton.** Thank you, Mr. Loper.

[The prepared statement of Mr. Loper appears in the Submissions for the Record on page 45.]

**Representative Saxton.** Mr. Stricker.

**STATEMENT OF TOM STRICKER, NATIONAL MANAGER, TECHNICAL AND REGULATORY AFFAIRS, TOYOTA MOTOR NORTH AMERICA, INC.**

**Mr. Stricker.** Good morning and thank you for the opportunity to be here today.

**Representative Saxton.** If I may just reiterate this, we probably have about an hour to finish up here or maybe a little bit less. So if you could summarize your statements in 5 minutes or so, we would appreciate it.

**Mr. Stricker.** Certainly. I will submit the full statement for the record.

My statement today was going to address fuel cell vehicles, diesel vehicles and hybrid vehicles. I will just quickly summarize a couple of comments on fuel cells and diesel vehicles, and then I will spend the 5 minutes on hybrid vehicles.

On the fuel cell side, obviously the vehicles offer great promise, as Mr. Garman mentioned, for eliminating the vehicle from the environmental equation, assuming that hydrogen can be made in a clean way. There are a lot of challenges, still, to the marketability of hydrogen. In fact, the biggest challenge we see on the vehicle side is the storage of hydrogen on the vehicle to improve the range of the vehicle.

There are infrastructure issues as well in terms of establishing the infrastructure and producing hydrogen in a clean way, as I said.

On the diesel side of the technology equation, of course, diesels are very popular in Europe right now but we see some uncertainty, in just how extensively light diesel vehicles will penetrate the U.S. market. Market demand is not really clear to us right now. The fuel price advantage and tax policies that exist in Europe aren't present here for diesel fuel. And really the big challenge for diesel in the U.S. market is meeting EPA's tier 2 emissions standards for 2007 and beyond.

As you know, Toyota is aggressively pursuing hybrid technology because we feel it can provide increased fuel economy, reduce fuel consumption, cleaner emissions and improve vehicle performance without changes in refueling infrastructure.

Hybrids combine an internal combustion engine with an electric motor and a battery. There are several types of hybrid systems that are out there, and their differences are important in terms of their costs and benefits.

Toyota's Hybrid Synergy Drive that we market here in the United States, is what is called a full or strong hybrid. The advantage of that type of system is that the vehicle can operate on the battery alone, electric motor alone, or the internal combustion or combinations of the two power sources. The ability to operate on the electric motor only is the key to achieving the significant fuel economy improvements.

In addition, braking energy is captured and reused to recharge the battery and, of course, the vehicles never need to be plugged in. It is amazing how many people still don't know that.

**Representative Saxton.** Would you say that again? I didn't quite get that.

**Mr. Stricker.** The hybrid vehicles don't need to be plugged in. On our system, the battery is recharged while braking, called regenerative braking, and also we use the gasoline engine at times to recharge the battery. So no plug in is required. And a lot of people don't understand that about hybrids. They still think there is a little yellow cord that they have to plug into the wall.

Since we first introduced the Prius in Japan in 1997, we have made substantial improvements. The first generation was a subcompact car rated at about 42 miles per gallon that met low-emission vehicle requirements. Acceleration from 0 to 60 was about 14.5

seconds. With each subsequent generation of Prius, we have increased size, performance and fuel economy while lowering emissions. The current Prius is a mid-sized sedan with an EPA rated fuel economy of 55 miles per gallon and goes from 0 to 60 in about 10.5 seconds. Compared to the average mid-sized car, Prius saves about 350 gallons of gasoline per year. Today's Prius meets Tier 2 bin 3 levels, making it about 50 percent cleaner for smog forming emissions than the tier 2 bin 5 level, which is what the average new car will be required to meet in 2007.

The major reason that we focused on hybrids rather than diesel for the U.S. market is that we achieve the fuel savings, plus there really isn't any question about whether you can meet the emission standards or even exceed the current emission standards.

And the market has begun to react. The sales of 2005 alone equaled the total sales for the previous 4 years. However, it was mentioned earlier today despite this relative success, the hybrid vehicles still make up only about 1 percent of the annual vehicle sales in the country.

Earlier this year, we announced two new hybrids. In April we launched the Lexus RX400h SUV, and in June, the Toyota Highlander Hybrid.

The Lexus RX400h is an all wheel drive system, so it combines the gasoline engine with a front motor and a rear motor. And the result is a V-6 SUV that gets superior fuel economy. It gets the same fuel economy as the average compact car. Yet it has the acceleration and performance of competing V-8s. We estimate the RX400h saves about 350 to 400 gallons per year of fuel compared to comparable luxury SUVs.

And further, it is certified to the tier 2 bin 3 level as well, just like the Prius.

The Highlander Hybrid is available in two- or four-wheel drive, and basically has similar environmental performance.

We envision a day when consumers will be able to choose from a hybrid power train option just like they currently select between a 4 cylinder, or 8 cylinder conventional engine. With that in mind, we have recently announced the upcoming production of two additional models, the Lexus GS450h, which is a luxury Sedan and the Toyota Camry. And the Camry will be our first hybrid produced here in the United States at our Georgetown, Kentucky plant. We expect these vehicles, as well, to have superior fuel economy performance.

And the final point I want to make about hybrids, and I think Mr. Garman mentioned as well, concerns its applicability in the future to a wide range of power trains, including fuel cells. Some view hybrids as a temporary measure that is going to be replaced eventually by fuel cells. We view the hybrid technology as an integral part of the future fuel cell vehicle. The only fundamental difference right now between our hybrid system and our fuel cell hybrid vehicle, the FCHV is that the gasoline engine is simply replaced by the fuel cell stack, a slight oversimplification, but essentially that is the only difference.

The hybrid portion of the system remains effectively unchanged. So the battery improvements and technology development and control systems improvements and our experience in the production



phase of these components, and cost reductions that we are able to achieve will all be applicable directly to fuel cells in the future as we see it.

So in summary, we view hybrids as a core technology as we pursue more sustainable transportation. The reality is that various types of power trains and fuels are likely going to be needed to address the energy issues that we are here to discuss and public health concerns. Which technology is eventually going to win out, and when they win out, depends really on our being able to develop a product that meets consumer expectations at a reasonable cost compared to the other alternatives that are going to be out there. This concludes my remarks. Thank you.

**Representative Saxton.** Thank you very much, sir.

[The prepared statement of Mr. Stricker appears in the Submissions for the Record on page 49.]

**Representative Saxton.** Ms. Wright.

**STATEMENT OF MARY ANN WRIGHT, DIRECTOR, SUSTAINABLE MOBILITY TECHNOLOGIES AND HYBRID AND FUEL CELL VEHICLE PROGRAMS, FORD MOTOR COMPANY**

**Ms. Wright.** Thank you. My name is Mary Ann Wright. I am with Ford Motor Company, and thanks for including me in the hearing today. Energy security and rising fuel prices are significant issues facing our Nation. Industry, Government and consumers all have important roles to play in addressing our Nation's long-term energy needs. We, as industry, should continue to invest in the development of energy efficient technologies that provide cost-effective solutions for our customers. And government needs to take steps to bring advanced technologies to market more quickly and cost effectively through customer incentives. Ford is committed to improving vehicle fuel economy by developing a portfolio of fuel efficient advanced technology vehicles.

Product solutions to improve fuel economy must result in vehicles that customers can afford and they are willing to purchase because they want to drive them. We know that when consumers consider purchasing a vehicle, they are concerned with affordability, quality, reliability, styling, safety and appearance. So from our perspective, we can't compromise on any of those important attributes.

Our vision for the 21st century is to provide transportation that is affordable in every sense of the word, socially, environmentally, as well as economically for business sustainability. In other words, sustainable transportation. And we need to do that by offering innovative technology that makes a difference for our customers and the world in which they live in, and it is not just the right thing to do. It is smart business for us.

As a result, we are doing substantial development work with renewable fuels and four advanced powertrain technologies, including gasoline electric hybrids, clean diesels, hydrogen-powered internal combustion engines and hydrogen fuel cell vehicles.

We do believe that renewable fuels will play an increasingly important role in addressing U.S. energy security and energy diversity. All of our gasoline vehicles are capable of operating on blends, including up to 10 percent renewable ethanol. In addition, Ford has produced approximately a million and a half flex fuel vehicles capa-

ble of operating up to 85 percent ethanol. Overall, the industry has seen about 5 million vehicles.

Now, in our Ford fleet today, the Taurus, the Explorer and the Mountaineer are flex fuel vehicles. Next year, the vehicles that will be offered as flex fuels are the F-150, the Crown Vic and the Grand Marquis. I think—although the number of E-85 vehicles continue to grow, there is less than 300 of these fueling stations in the country. We are working with the various States that are major ethanol producers, such as Illinois. And we are working to increase consumer awareness that these alternatives do exist out there.

We are also at the leading edge of hybrid vehicle development. Ford Escape Hybrid and Mercury Mariner hybrid are great examples, our hybrid SUVs can do virtually anything that the regular gas Escape Mariners SUVs can do, but with approximately 75 percent better fuel economy in city. And I also want to tell you that it only produces one pound of smog forming pollutants over 15,000 miles of driving. And I am also very proud to say that we have over 139 patents that my engineers and scientists developed in creating the Escape Hybrid, which I want everybody to recognize was engineered here in the United States and is the only full hybrid SUV produced here in the United States in our Kansas City assembly plant.

Additionally, over the next 3 years, we are going to have three other hybrids joining our fleet of vehicles. We will include the Mazda Tribute, and then we will be taking our next generation technology and putting that into our new Ford Focus and Mercury Milan. And again, we are emphasizing in-sourcing and bringing in house this technical capability.

Much of what we have learned in developing these hybrids will help us as we explore other advanced technologies. Nevertheless, the key challenge facing hybrids is incremental costs, both in terms of the higher prices for the components as well as the engineer expenses associated with it. And that needs to be overcome for the technology to transition into what I call mainstream product viability.

We are also working on advance light duty diesels. Today's clean diesels offer exceptional driveability and can improve fuel economy by 20 to 25 percent. All you have to do is go over to Europe and look under the hood of about half the vehicles over there and it is demonstrated. I think, as we said today, in the interest of time, I think the key challenges ahead of us are the incremental costs and the infrastructure associated with the clean fuel and the after treatment.

We are also working on what we think is the next step on the road to sustainable transportation, and that is hydrogen powered internal combustion engines. We are a leader in this technology. And we do think that it is a bridge to the development of a hydrogen infrastructure, and ultimately the fuel cell vehicles. We recently announced that we are developing hydrogen powered E-450 shuttle buses that we are going to be putting into demonstration fleets across North America. We have a fleet that will be down in Orlando at the airport, and we also have a fleet out in California as well as working with the Dallas Airport Authority.

And what this will do for us is, as we are maturing the fuel cell technology itself, allows us to focus on things like infrastructure development, as well as one of our key technical challenges, and that is fuel range.

Further down the road, hydrogen-powered fuel cells appear to be another promising technology for delivering sustainable transportation. Hydrogen can be derived from a wide range of feed stocks to increase energy diversity, and fuel cells are extremely efficient and produce no emissions. The Ford Focus Fuel Cell vehicle is a state-of-the-art hybridized fuel cell system which is being deployed right now across the United States. We are putting a fleet in California, Southeast Michigan, and Florida. We have a fleet already deployed in Vancouver, Canada as well as Germany.

Fuel cells are promising but there is also a lot of vehicle and infrastructure challenges that must be addressed before they can reach commercial viability. Frankly, that is cost, reliability, and feed stocks.

We also need to ensure that we get the appropriate infrastructure developed.

Solutions will require technological breakthroughs and the concerted efforts of Government, the auto industry and energy providers.

In conclusion, our objective is simple. We need to give consumers more of what they want, which is performance driveability, affordability, utility and a cleaner environment. Advanced vehicle technologies can increase fuel efficiency without sacrificing these attributes.

We support policies that promote research and development of advanced technologies in the development of renewable fuel sources. In addition, market-based consumer incentives need to be a key element of a coordinated strategy, effectively address stable transportation and energy security. Consumer tax credits for advanced vehicles will help consumers overcome initial cost premiums associated with early market introductions, bringing more energy efficient vehicles into the marketplace more affordably and at higher volumes. Ford Motor Company believes that the current U.S. energy bill contains many important policies and incentives to address our Nation's energy needs, and we encourage Congress to pass this legislation. Thank you.

[The prepared statement of Mary Ann Wright appears in the Submissions for the Record on page 53.]

**Representative Saxton.** Mr. Chernoby.

**STATEMENT OF MARK CHERNOBY, VICE PRESIDENT,  
ADVANCED VEHICLE ENGINEERING, DAIMLERCHRYSLER  
CORPORATION**

**Mr. Chernoby.** Thank you, Mr. Chairman, and distinguished Members of the Committee. I want to thank you for the opportunity to appear today. I am going to be as brief as I can because I know we are time limited and try not to be repetitive.

At DaimlerChrysler we agree with many of the points of view that my colleagues have made this morning. It is interesting to note while oil prices are high and we take a look at the overall metrics of the auto industry and the economy actually total vehicle

sales in June are up 2 percent. Market share of trucks is actually slightly higher than the prior year. So, to us, that doesn't mean that we can sit on our laurels and not work on these advanced technologies. In fact, just the opposite.

DaimlerChrysler is absolutely focused on creating and then supplying a very broad portfolio of technologies because in the end, what matters is market penetration. If we don't have market penetration of both the vehicle and then the fuels in the vehicle, we will not see the benefits to the environment nor will we see the reduction in oil consumption in this country. So we absolutely must succeed, and DaimlerChrysler, like my peers have said, will not pick which technology will win. The consumer is going to do it. So we are definitely focused on continuous improvement of IC engines as the Chairman mentioned, things like cylinder deactivation, in our 5.7 liter HEMI, have provided millions and millions of gallons of fuel savings already in the marketplace today, not tomorrow. We are focused on light-duty diesels. We think they have an exceptional place in the market. Again, it is going to be providing the highest value to the consumer.

Hybrids provide tremendous value to the customer who drives in city environments. Unfortunately on the highway, at high speeds, a hybrid can be nothing more than hauling around an extra 400 or 500 pounds in the vehicle with very little benefit. This is the place where we think diesel or cylinder deactivation technologies provide an excellent benefit to the consumer. So we are focused on providing a range of technologies in all these areas. Hybrids as well.

DaimlerChrysler has announced a joint program with General Motors. We think we have come up with a program that will allow us to get scale of volume, and as Ms. Wright mentioned, a lot of this is about component costs. We have to get a cost-effective system out there. We believe that the program we have done with General Motors will help us get this scale of volume and reduce costs so we can have a viable business case.

As the Under Secretary mentioned, we must have a business case to remain a viable entity and it is all about coming to the market at the right time at the right scale of volume to make that happen.

DaimlerChrysler is also very focused on collaborative efforts on fuel, things like biodiesel we think is an excellent example of another alternative fuel. We talked about renewable fuels earlier and FFE, we think ethanol is also an excellent alternative for the customer. And that is why we built more than a million and a half ethanol vehicles out there for the customer to consider. These vehicles are on the road today.

But as was mentioned, unfortunately the fueling infrastructure is not there for these vehicles to actually realize the benefits to the environment or reductions in oil consumption.

And then finally, I want to mention one more technology. We cannot forget about things other than the propulsion system. We must remember the weight of the vehicles, advance materials are a very important part of our pre-competitive research that we do jointly with the government through the Department of Energy. If we can drop vehicle weight, and implement technologies which en-

able aerodynamics, we will also realize incremental benefits, because in the end, I don't think there is going to be any one answer that is going to fix this problem. It is going to be a lot of little things that will add up.

In closing, DaimlerChrysler is also very focused on the longer-term approach with hydrogen fuel cells. We spent more than a billion dollars in R&D on this effort. We have the largest worldwide fleet out there in three different continents. And then we participate very strongly in the Department of Energy's efforts, both in the demonstration program and in the pre-competitive research. Because in the long run, we do agree that this is probably the key technology that is going to break the entire subject loose 20, 30 years from now.

With that I want to thank the Committee for allowing us to speak today. And we must continue to work together to support the joint programs of government, academia and industry to ensure that we tap the best resources this country has to offer to find the answers to these difficult questions. Thank you.

[The prepared statement of Mark Chernoby appears in the Submissions for the Record on page 54.]

**Representative Saxton.** Thank you all very much.

My other job here is to be a member of the Armed Services Committee and it is really encouraging to see the kinds of advancement in technology that you have each talked about. And on the Armed Services Committee last week, or perhaps earlier this week, we were trying to solve a problem that has to do with the security of our Marines. And I was made aware that there is a weapons systems which has been designed and prototyped called the Thunderbolt, which is a 40,000-pound tracked vehicle that is driven by a hybrid electric engine. And I was actually shocked to find that out, because I didn't know that that kind of technology actually exists. And that engine will drive that vehicle for 600 miles with 140 gallons of diesel, and it will go 60 miles per hour.

I learned this because we are going to try to produce this system for an armored vehicle for our Marines. And when I found out that that technology actually exists today, I was surprised, and of course, heartened that there is a future going down this road. So I am really taken with what I have learned here in the last few months about the technologies that have been developed both in this country and overseas.

And as I look at the chart—I wonder if we could get that chart back up. Thank you.

As I look at the chart, and, going forward, it is very encouraging to see that as was noted earlier, maybe by 2025, or thereabouts, 2030, we would begin to see that we really have a significant potential for dropoff in our dependence on petroleum.

But in the short term, these technologies apparently are not expected, at least by the Department of Energy, to be players in a major way that will reduce our dependence on foreign oil. And as I mentioned earlier, we do have some technology which Ms. Wright spent some time talking about, and Mr. Loper mentioned it also, although in a not so positive way. Flex fuel vehicles, which represent a technology that is available today, which could make a significant difference if, as Mr. Loper suggested, and as my bill sug-

gest, we had an infrastructure to deliver—to deliver this fuel with alcohol and I am wondering what is your take on this?

Mr. Stricker, you, and Ms. Wright and Mr. Chernoby, you all talked about hybrid vehicles and fuel cell vehicles as being the answer in the future. We have some immediate needs. How can we solve this problem with the immediate need given the fact that we have technology available today that could, if managed correctly, I believe, solve the problem short term? Or at least help solve the problem short term?

**Mr. Stricker.** I would make two points in response to the question. I wasn't able to see this chart when I was sitting down, so this is the first time I have glanced at it. But one point I would note is the hybrid vehicle case there is not insignificant, and it is fairly near term. So I think from our view, while hybrids are just now starting to penetrate the market, it depends on your definition of "near term." I think we see it as a very viable technology that can, as that chart reflects, provide some significant reductions in petroleum.

On the issue of flex-fueled vehicles, in particular, Toyota does not currently make flex fuel vehicles here in the United States and you wouldn't see one out there on Independence Avenue driving by. The problem, as your legislation apparently tries to address, is the availability of the fuel. We don't see a real need, per se, right now or benefit to adding the extra cost to the vehicles and putting a whole bunch of vehicles out there when there really isn't any fuel, so I think we would be interested in looking more closely at your bill to see how that might spur some of the fuel to actually get out there.

**Representative Saxton.** What is the cost during the manufacturing process to build a car or a vehicle that can burn E-85?

**Mr. Stricker.** My colleagues will have to answer that because we don't currently make that.

**Representative Saxton.** Before you get to that question, what are the prospects, short term, in the next, say, 5 years of making a difference with flex fuel cars?

**Mr. Chernoby.** From a DaimlerChrysler perspective, I would respond to a couple of your statements. I don't know the exact number of the cost, but essentially it is the difference in the E-85 flex fuel vehicle, that was mentioned earlier it is a question that number one, sensing the field, whether they use a sensor or software. And the other thing is you have to change some materials to handle the more corrosive nature of the fuel and throughout the fuel system and into the engine.

But the bottom line to think about is those changes and those technologies are things we can buy at high volume today. We could do it now. We can turn the spigot on at greater numbers than we are doing today. And the costs are a minimum of a decimal point, if not more than a decimal point different than the hybrid technology.

Even if we wanted to crank up if the demand was there in the market at a cost where we could recover in a business case, even if you wanted to crank it up by multiple volumes today, you couldn't because the component supply base is not there. It takes time for infrastructure and industry to build up the capability to

build technologies and volume and that is where the FFE and the ethanol example is an interesting one, because those technologies at high volume, I think, could be reached in a much faster than time if we wanted to build more vehicles than we are building today and at a much higher value quotient than we can with the hybrid technology as it stands today.

Now obviously, those costs can change in the future as the scale of volume of the hybrid components increases.

**Ms. Wright.** I agree, I am not going to repeat everything he said. It is primarily in the fuel system. I actually did the 2000 Taurus flex fuel so I lived through that. And Ford is very committed to the flex fuel market. We will be producing the F-150s, the Crown Vics and Grand Marquis in significant quantities. I think the key is providing awareness to customers that this is out there and what the benefits are.

The infrastructure, we all understand what the issues are there. I think Mark is absolutely right and that is that, in addition to not having frankly an onshore capable supply base to help boost the economic and the technical viability, we also have a skillset shortfall here in the United States. My group is growing exponentially as we continue to develop more hybrids and more of our advanced technologies. I am struggling, quiet frankly, to get the skillsets that I need to fill the technical positions. It is a real dilemma that we have here.

The business case cannot be ignored. And one of the things that we are very—one of my top priorities frankly is working with our domestic supply base to help develop that capability so that I can leverage them as well as the universities to help fill these gaps so that we can get these to a more commodity-like alternative.

**Representative Saxton.** You are talking now about hybrids?

**Ms. Wright.** Hybrids, and frankly all of our advanced technologies. I think someone, I don't know if it was Mr. Garman or it was perhaps you who had talked about the components of these technologies that frankly go across the whole span of the technologies, power electronics, control architecture, advanced propulsion, those are consistent whether you are talking about hybrid electrics, fuel cells or hydrogen internal combustion engines. And there are skillsets that we need to build all of those alternatives.

**Representative Saxton.** So we all agree that short-term technology exists to make a real difference through flex fuels, however, the supply of flex—of ethanol is a huge problem. Producing and delivering it are two separate problems, right?

**Ms. Wright.** Right.

**Representative Saxton.** Mr. Hinchey.

**Representative Hinchey.** Mr. Chairman, thanks, thank you all for the presentation. They were very, very interesting. Let me just ask you a very simple and direct question first off. What is the energy industry's position with regard to increasing CAFE standards? Mr. Stricker, do you want to start?

**Mr. Stricker.** Well, I can speak to Toyota's position. I won't speak for the entire industry. I am not here to represent the whole industry today.

Toyota has always exceeded the CAFE standards for both passenger cars and light trucks. There was mention earlier today

about the growing market share of light duty trucks, and that is the reality that we are facing today and that is one of the reasons that Toyota has gone into the SUV market with hybrids to try to get the technology out there in the truck sector so that there are real options out there in order to improve fuel economy on those vehicles. And it has been mentioned several times, even, I think by the Members of the Committee, that trucks are really where the focus needs to be. Our passenger car CAFE today is, of course, in two separate fleets. There is an import fleet and a domestic fleet, the way the legislation and regulations are set up. But our CAFE stands at about 33, 34 miles a gallon compared to 27.5-miles-per-gallon standard. And the industry, as a whole, does fairly well on passenger car CAFE. But the issue does seem to be light trucks. And that is one of the reasons that we are trying to get the hybrid technology out there and have it be an option and tool that is available.

**Ms. Wright.** I am going to be quite candid with you. I am Ford's top engineer for all the advanced technologies and the strategies, so I am not the CAFE expert, and I am frankly not prepared to provide our perspective on that. But we can follow up in writing.

[The information requested from Mr. Hinchey appears in the Submissions for the Record on page 61.]

**Representative Hinchey.** Thank you.

**Mr. Chernoby.** And unfortunately, I am going to have to ditto Ms. Wright. I am the vice president of vehicle engineering. I am not on the regulatory side. So certainly we can provide input.

**Representative Hinchey.** Mr. Chernoby, DaimlerChrysler is doing a lot of work with hybrid buses, and as you pointed out in your testimony, this is an area where the hybrids really make sense, in your urban areas.

Can you give us a little update on where you think this is going and what DaimlerChrysler is doing to move this forward, to put more of these vehicles in cities across the country?

**Mr. Chernoby.** As you know, DaimlerChrysler is very much a worldwide leader in terms of heavy fleet vehicles, and buses are no exception. Like you said, we think it is just a fabulous application, it is absolutely stop-and-go driving so there is tremendous amounts of energy that can be captured and stored back in the electrical system.

DaimlerChrysler is doing everything we can to make that technology available at volume quantities and in every one of the buses we built, but we are not going to stop there. We have actually got many, many buses running around the world, and like Ms. Wright and Mr. Stricker said, many of the same components can be applied to the hydrogen fuel cell vehicle as well.

And that is what we have done. We actually have hydrogen fuel cell buses running in many sectors over the world, and we think that is the next step answer even above the hybrids, but certainly the technology is there. We are ready to put the product out there for the market. It is a matter of supply and demand.

**Representative Hinchey.** What is the market? How are you dealing with mayors and city councils in places across the country where these kinds of buses would make sense to them?



**Mr. Chernoby.** I am not involved in those discussions. I can't speak to that piece of it. But in certain areas certainly, the market has responded. But I think typically it has been due to a specific government focus and initiative in a local area. But I will certainly follow up and I will get you a response of what we are doing from a government perspective.

**Representative Hinchey.** And you're looking at it from an international point of view, global point of view as well?

**Mr. Chernoby.** Absolutely.

**Representative Hinchey.** Mrs. Wright, the Ford Motor Company has been very active for many decades in the European market and the European market has been much more conducive early on because of taxes and the price of fuel for vehicles that have higher fuel economy. Isn't the Opel a Ford product?

**Ms. Wright.** GM.

**Representative Hinchey.** But am I wrong that you have been very active, Ford Motor Company, very active in the European economy?

**Ms. Wright.** We are a very significant player in Europe and very significant players in the diesel market, yes.

**Representative Hinchey.** Is there any transformation of the technology that has been successful over there, the cars that work over there that get much better fuel mileage than ours do over here? Any transfer of that technology back?

**Ms. Wright.** I think it actually works both ways in answer to your question, yes, if you take a look at the diesels and the really terrific work that is going on over in Europe and we are planning on, you know, migrating it over to the United States.

I think, quite frankly, we have a public perception, not just Ford, as an industry we have a public perception issue to overcome relative to the reputation of diesels from 25 years ago. They were dirty and smelly and poor starting and poor performing. Well, anymore, most people who get into a diesel wouldn't even know that they were in a diesel. Extremely efficient, extremely good on carbon dioxide emissions.

**Representative Hinchey.** And the noise is down too.

**Ms. Wright.** Oh, you can't even tell. So yes, that technology transfer is taking place.

Now, conversely, I have global responsibility for all our advanced technologies that I am, my group is working with all of our global brands, not only address the issues that are taking place here in the United States, but as well as the pressures that frankly are coming hard and fast over in Europe as well.

**Representative Hinchey.** Thank you very much.

Mr. Stricker, the issue that you talked about in the Lexus which is an interesting SUV, and you are presenting this as an SUV that has all the qualities of that kind of vehicle, but gets a lot more in gas mileage. Can you talk a little bit about that?

**Mr. Stricker.** Sure, I would love to.

The RX400h is a Lexus, mid-sized SUV. It has a combined EPA fuel economy rating of about 28 miles per gallon, which, as mentioned in my prepared remarks, is about the average for a compact car today. It is an all-wheel drive system. One of the advantages of the all-wheel drive system aside from some performance en-

hancements and traction improvements, is the ability to recapture additional braking energy.

With a front-wheel drive or a rear-wheel drive system, you only have two wheels with which you can capture braking energy. But with an all wheel drive system, you can capture energy from all four wheels improving the efficiency of the product. The 0 to 60 time is just about 7.3 seconds, which is on par with a lot of the competing luxury SUVs.

**Representative Hinchey.** And it makes sense out on the open road as well?

**Mr. Stricker.** Yes, the comment earlier with respect to hybrids and city operation, our hybrid system performs better on fuel economy in the city than on the highway. You can just look at the EPA ratings and see that. There is a lot more starting and stopping in city operation. Although, the system does use electric motor power during highway type operation. The other interesting point is, I am not really sure what is city and highway anymore when it comes to the real world. I live in an area out in Howard County, and I drive 35 miles to work each day and it is amazing if I can get over about 35 mile per hour, and I am on I-95 or the BW Parkway, so it is really hard to say what is city and highway anymore.

It is that way up and down the whole east coast, it is that way pretty much up two thirds of California as well. We think the technology obviously provides terrific benefits, clean emissions, and we are heading in that direction as quickly as we can.

**Representative Hinchey.** You almost have to get out into those red States to really experience it.

Well, thanks very much.

Mr. Loper, you made some comments on the energy bill, and our Chairman here is a leader in this regard, and as you heard him express himself today, he is very interested in producing legislation trying to deal with this problem from an immediate point of view.

The energy bill just started on the floor about 10 minutes ago, and frankly, I think it would have been a great bill and very progressive had it been introduced in about 1955, but I think it has a long way to go in trying to meet the demands of today.

So would you comment a little bit for us, Mr. Loper, on what are the things we ought to be doing now to improve energy efficiency particularly in transportation?

**Mr. Loper.** Well, as I suggested in my remarks, I think we are already doing a lot of things to increase efficiency. The problem is it is not being translated into fuel economy. And I am a little bit—I find this kind of graph, at least suspect. Hybrid vehicles have enormous potential and we are fully supportive of the technology and their deployment. But if the hybrid technology is used to bring Thunderbolt armored vehicles in and put them on America's highways like the GM's Hummer, then you are not going to get the fuel economy gains that are being predicted here.

We have gone out and tried to look for new policies, magic bullets that would help us crack this nut, and quite honestly, we come back to the same very familiar policies that we are all aware of and can't quite seem to get to. The National Academy of Sciences in 2001 said that you could get CAFE to 30 miles per gallon combined fuel economy for trucks and cars and cost effectively for consumers.

When they did that study, gasoline prices were \$1.30. They are well over that now—at my local pump they were \$2.44 this morning; and so the economics of high fuel economy vehicles has improved. The industry needs to bring more of them to market. They need to market those technologies as well.

One of the other speakers mentioned the HEMI technology as a fuel-saving technology. I am a racing enthusiast and I watch the Speed Channel. The advertisements on the Speed Channel are not for HEMI trucks that get good fuel economy, they are for HEMI trucks that will beat you off the line. And I think that is sending the wrong message to American consumers and that Congress can help communicate a different message.

**Representative Hinchey.** Certainly is reminiscent of the 1950s.

**Mr. Loper.** Yes. The good old days.

**Representative Hinchey.** Or 1960s.

**Representative Saxton.** I just have one further question. Mr. Chernoby, in your statement you mentioned that there was a technology called two mode hybrid, and I understand that that involves having two electric engines in a transmission rather than one engine in an engine bay.

Would you talk a little bit about this? I think I understand most of what was said this morning, but this was new.

**Mr. Chernoby.** Try to make it in the simplest terms. Basically the two motors and where they are placed within the drive line with the transmission. Again, the joint program with General Motors what it allows you to do is not only use hybrids in the context of the systems that are there in the market today, but also use those motors in conjunction with each other to actually shift the operation of the gasoline engine in higher speed highway environments, and virtually all operating conditions to a much more efficient operating condition. The analogy would be somewhat similar to what you might do with a continuously variable transmission. In other words, actually shift the engine to a different RPM level where that engine runs more efficiently and then use those two motors to assist in making that happen.

**Representative Saxton.** And so what are the advantages here, greater fuel efficiency?

**Mr. Chernoby.** Absolutely yes, the engine is basically operating in a more efficient condition in addition to all the traditional hybrid operations that you get out of a hybrid.

**Representative Saxton.** Mrs. Wright, you look like you are dying to say something.

**Ms. Wright.** No.

**Mr. Stricker.** I would just add, Mr. Chairman, that the Toyota Hybrid Synergy System is not architecturally exactly the same, of course, but it utilizes a generator to vary the gasoline engine speed to accomplish that effect of a continuously variable transmission as well.

Basically there is certain speeds and loads at which the gasoline engine is most efficient. And if you can force the gasoline engine to operate in the most efficient range, then that obviously improves the efficiency over all of the system. So you can use a second motor

or generator to vary the speed of the gasoline engine to where it is most optimal.

**Representative Saxton.** All right. Well, thank you all for being here, thank you for your interest and your hard work on what is obviously a tremendously important set of issues. We appreciate you sharing this information with us here this morning. And hopefully we will find some ways to work together in the future to effect these efficiencies that you talked about today. Thank you very much.

[Whereupon, at 11:58 a.m., the hearing was adjourned.]

## Submissions for the Record

---

---

PREPARED STATEMENT OF HON. JIM SAXTON, CHAIRMAN, A U.S. REPRESENTATIVE  
FROM NEW JERSEY

I am pleased to welcome Under Secretary Garman and the other expert witnesses before the Committee this morning.

With oil prices in the neighborhood of \$60 per barrel, it is not surprising that there is increased interest in fuel efficiency and alternative ways of powering cars and trucks. Increased demand for oil, especially from Asia, combined with the restrictive practices of the OPEC cartel, have together created a situation where oil prices have spiked in recent months. With OPEC members only last December complaining about an "over-production" of oil, it is abundantly clear that we cannot depend on them to be reliable suppliers of petroleum. Unfortunately, according to many experts, OPEC and elevated oil prices may be with us for an extended period of time.

Gasoline accounts for about 45 percent of American oil consumption each day, so it is appropriate to consider the long-term potential of alternative automotive technologies that would reduce our dependency on oil. The purpose of this hearing is to explore these alternatives and examine which of them seem to be most feasible over the short, medium, and long terms. Greater efficiency in internal combustion engines, using methods such as shutting off half of the cylinders when maximum power is not needed, is already being realized.

Flexible fuel vehicles capable of running on a mixture of gasoline and up to 85 percent alcohol are also already in production. Recently I have introduced legislation to enhance tax incentives for the purchase of flexible fuel vehicles. U.S. auto companies already make millions of flexible fuel vehicles that are only slightly more expensive to produce than cars with conventional engines.

The market for hybrid vehicles is also expanding far beyond small economy cars and promises additional savings. Small hybrid cars demonstrated the feasibility of this technology, and it is now being applied to mid-sized passenger cars as well as to SUVs. There are some exciting new refinements of hybrid technology that could produce significant increases in fuel efficiency. Perhaps in the future hybrid or electric vehicles could even be recharged using the existing power grid.

None of these technologies alone is likely to reduce our oil consumption significantly in the short run. But over the next decade, they could make a real difference, and synergies between them offer the potential for further gains. For example, improved efficiencies of the internal combustion engine could be combined with hybrid and other technologies to maximize fuel savings.

Over the long run, the high price of oil is likely to create incentives for other technological breakthroughs that will be more dramatic. Hydrogen fuel cells offer one promising technology for the long term. Since power can be most efficiently generated in power plants, there are those who argue that a transition to hydrogen fuel cell or electric vehicles offers the most promise in coming decades.

In any event, continued Federal Government and industry support for research and development, and the vision of entrepreneurs and inventors, are needed to ensure that advancements in technology will enable us to eventually increase our energy security.

---

PREPARED STATEMENT OF HON. CAROLYN B. MALONEY, A U.S. REPRESENTATIVE  
FROM NEW YORK

Thank you, Chairman Saxton. The question of what role alternative automotive technologies will play in our energy future is an important one, and I hope we will be able to learn things from this hearing that can inform our future policy choices.

We are heavily reliant on oil to power our cars and fuel our lifestyle, and 58 percent of the oil we consume is imported, often from politically volatile regions of the world. Promoting conservation, raising efficiency standards, and supporting R&D can all play an important role in overcoming our dependence on oil and reducing our reliance on imports.

Today, more than two-thirds of the oil consumed in the United States is used for transportation, mostly for cars and light trucks. Increasing fuel efficiency would lower pressures on oil prices, enhance our national security, curb air pollution, and reduce the emission of greenhouse gases, which cause global warming. Clearly, alternative fuel and automotive technologies are needed to help achieve these goals, but we cannot overlook the importance of other approaches.

Corporate Average Fuel Economy (CAFE) standards for cars have remained static for two decades and average vehicle fuel economy has actually declined since the late 1980s when sales of SUVs began to climb. Car manufacturers could increase the average fuel economy from today's 27.5 miles per gallon to 46 miles per gallon just by implementing existing technologies, according to a recent MIT report. This would reduce our dependence on foreign oil by three-fourths and cut greenhouse gas emissions by nearly a third.

The auto industry is pursuing a variety of advanced vehicle technologies, such as hybrid vehicles, fuel cells, and hydrogen fuel. While hybrid vehicles have received a lot of attention, they still make up only about 1 percent of the 17 million vehicles sold in the United States each year. However, some hybrids don't contribute much to energy efficiency, as car companies are building more high-end, high-performance vehicles.

Congress needs to be careful about which technologies it subsidizes. We should make sure that we are not prematurely committing to any particular technology and neglecting other potentially beneficial approaches. We also should make sure that tax incentives are well targeted to achieving their objectives, rather than simply subsidizing behavior that would have taken place anyway. It doesn't make much sense to give a tax break when manufacturers are wait-listing consumers for certain models—the demand is already there, the cars are not.

I will be interested to learn more about whether the President's initiative to promote hydrogen fuel and fuel cells has realistic goals or is just science fiction. Right now, there is a danger that hydrogen fuel and fuel cells may never be commercialized because they are so expensive, and this initiative may draw funding away from near-term technologies such as hybrids.

I have many more questions, but I will stop here because we have a panel of witnesses that I hope will be able to provide some answers, or at least provide us with more information about the intriguing technological possibilities that lie before us. Getting solid and reliable information is the first step toward developing sound policy. I don't think any of us believe that the current energy bill is the last word on energy policy, and much remains to be done to meet the challenges that lie before us.

Mr. Chairman, I look forward to hearing the testimony of our witnesses today.

---

STATEMENT OF HON. DAVID K. GARMAN, UNDER SECRETARY FOR ENERGY, SCIENCE,  
AND ENVIRONMENT, U.S. DEPARTMENT OF ENERGY

Mr. Chairman and Members of the Committee, I appreciate the opportunity to appear before you today to discuss the role of the Department of Energy (DOE or Department) in the development of advanced technologies for energy efficient vehicles.

Recently, President Bush spoke on energy policy and economic security at the Calvert Cliffs nuclear power plant and said that to make this country less dependent on foreign sources of oil, we need the following things: (1) to encourage conservation with the help of new technology; (2) to diversify our energy supply by increasing the use of alternative and renewable sources like ethanol and biodiesel; and (3) to develop a hydrogen-powered automobile over the next decade or two. The President envisioned that a child born today would be "able to take a driver's test in a hydrogen-powered automobile that has zero emissions, and at the same time will make us less dependent on hydrocarbons which we have to import from foreign countries."

THE PETROLEUM CHALLENGE

The President's remarks make clear the petroleum challenge that faces this country. The world is not running out of oil, at least not yet, but worldwide demand is increasing faster than production and prices are rising. Unless we reduce our dependence on foreign oil we risk that our energy economic security will be compromised.

The most urgent need is to address our transportation sector, which consumes two-thirds of all U.S. oil and is still growing. Petroleum imports already supply more than 57 percent of U.S. domestic needs, and those imports are projected to increase to more than 68 percent by 2025 under a business-as-usual scenario. Because petroleum-based liquid fuels, like gasoline and diesel, have a high energy density and are easily transported, they are ideal for transportation. The Department of Energy is committed to finding suitable alternatives, and developing the technologies that will use today's oil more efficiently.

At the G8 Summit earlier this month, the President reiterated his policy of promoting technological innovation, like the development of hydrogen and fuel cell technologies, to address climate change, reduce air pollution, and improve energy security in the United States and throughout the world. The Department's research and development (R&D) in advanced vehicle technologies, such as hybrid electric vehicles, will help improve energy efficiency and reduce petroleum consumption in the near to mid-term. But, for the long term, we ultimately need a substitute to replace petroleum. Hydrogen and fuel cells, when combined, have the potential to end petroleum dependence and provide carbon-free, pollution-free power for transportation.

Thus, our strategy for passenger vehicles has two components. For long-term energy independence, the Department is aggressively implementing the President's vision of working with industry to develop hydrogen-powered fuel cell vehicles. Hydrogen can be produced from a number of different feedstocks, and this supply diversity can help improve the Nation's energy security. Through the President's Hydrogen Fuel Initiative, research is being conducted step by step to eliminate the cost and technical barriers that need to be overcome before these vehicles can be widely available. Our near and mid-term strategy is to develop the component and infrastructure technologies necessary to enable significant improvements to the energy efficiency of the full range of affordable cars and light trucks. Such technologies as those used by hybrid electric vehicles can limit growth or begin to reduce our dependence on foreign oil right now, while also advancing some of the same technologies that will eventually be needed for fuel cells. These are described more fully in a document I am leaving with the Committee.

We are also working on technologies that will increase the energy efficiency of commercial vehicles, which due to their high performance needs, are unlikely to run on hydrogen. While the majority of commercial vehicles are powered by diesel engines, which have a higher efficiency than gasoline engines, there remains room for considerable efficiency improvements. Fuel cells could also play a role with commercial vehicles by saving fuel and reducing emissions from engine idling.

#### PARTNERSHIPS

Partnering with industry creates a common understanding of technical capabilities and barriers, which increases the likelihood that industry will pick up DOE's energy-saving technologies and that Federal research will target industry needs. To address the passenger vehicle market, we joined with the three domestic auto manufacturers and five energy companies to establish the FreedomCAR and Fuel Partnership. To address the commercial vehicle sector, we have the 21st Century Truck Partnership in which the Department teams with 3 other Federal agencies and 15 industry partners representing vehicle and component manufacturers, truck and bus manufacturers, and hybrid vehicle powertrain suppliers.

We also partner internationally through the International Energy Agency (IEA) on research for motor fuels, internal combustion engines, advanced materials, and hybrid propulsion systems. Our hydrogen vision is now shared around the world. The International Partnership for the Hydrogen Economy (IPHE) was established in 2003 and currently includes 16 nations and the European Commission. The IPHE partners represent more than 85 percent of the world's gross domestic product and two-thirds of the world's energy consumption and greenhouse gas emissions. The Partnership leverages limited resources by bringing together the world's best intellectual skills and talents to coordinate multinational Research Development and Demonstration (RD&D) programs that advance the transition to a global hydrogen economy.

Two DOE programs under the Office of Energy Efficiency and Renewable Energy (EERE) are leading the Department's R&D efforts for advanced vehicle technologies. The Hydrogen Program has the challenging task of fulfilling the President's vision of transforming our transportation system from dependence on petroleum fuels to a future with sustainable, pollution-free vehicles. The FreedomCAR and Vehicle Technologies Program is meeting the mid-term challenges of efficiency and alternative fuels for developing the best technology options for reducing the petroleum consumption of light duty vehicles over the next 20 years. Progress in such areas

as advanced internal combustion engines and emission control systems, lightweight materials, power electronics and motor development, high-power energy battery development, and alternative fuels will also contribute to fuel cell hybrids. Together, these two DOE programs provide a continuum of technologies that will revolutionize the way we drive.

#### FREEDOMCAR AND VEHICLE TECHNOLOGIES (OFCVT) PROGRAM

The following descriptions sample the range of technologies the Department is developing that will enable Americans to use less petroleum, reduce the impact on our environment, and still retain our mobility and freedom of choice when we purchase our vehicles.

*Hybrid Systems* technologies combining an internal combustion engine and a battery-powered electric motor can potentially reduce vehicle fuel use by 40 percent or more. Without building entire vehicles, we conduct our research in a vehicle systems context that enables us to determine the impact that improving a component has on overall energy efficiency. When I was at Argonne National Laboratory, I saw first hand how their Powertrain Systems Analysis Toolkit (PSAT) model, winner of a prestigious 2004 R&D 100 Award, is used in conjunction with their Hardware-In-the-Loop test facilities to validate vehicle components in a system, either virtually or with real devices.

*Energy Storage* technologies, especially batteries, are critical enabling technologies for the development of advanced, fuel-efficient, hybrid vehicles and ultimately fuel cell vehicles. Our energy storage research aims to overcome such technical barriers as cost, weight, performance, life, and abuse tolerance that the Department and the automotive industry have identified. DOE's technical research teams and battery manufacturers are collectively addressing these barriers.

Advancements we have made in batteries and electric drive motors, originally developed for battery-powered electric vehicles, have led to worldwide stimulation of hybrid vehicle technology. Every hybrid vehicle sold in the United States today, including those by foreign manufacturers, contains elements of battery technology licensed from one of our battery research partners. Other governments in both Europe and Asia have followed our example, creating partnerships with industry and supporting research in this area.

*Power Electronics* are at the heart of advanced technology vehicles. Advanced hybrid vehicles and fuel cell vehicles will require unprecedented improvements in both power electronics and electric drive motors. These new technologies must be compatible with high-volume manufacturing; must ensure high reliability, efficiency, and ruggedness; and must simultaneously reduce cost, weight, and volume. Of these challenges, cost is the greatest. Key components for hybrid vehicles (with either fuel cell or advanced combustion engines as the prime mover) include motors, inverters/converters, sensors, control systems, and other interface electronics.

*Advanced materials* are needed for structural components as well as powertrain components. The use of lightweight, high-performance materials will contribute to the development of vehicles that provide better fuel economy, yet are comparable in size, comfort, and safety to today's vehicles. The development of propulsion materials and enabling technologies will help reduce costs while improving the durability, efficiency, and performance of advanced internal combustion, diesel, hybrid, and fuel-cell powered vehicles.

Because a 10-percent reduction in weight can save as much as 6 percent in fuel consumption, our materials research goal is to enable vehicle weight reductions of as much as 50 percent by 2010 compared to the weight of 2002 vehicles. Carbon-fiber reinforced composites are an excellent candidate for these applications, but they are currently prohibitively expensive. To reduce these costs, we are developing a microwave-assisted plasma (MAP) manufacturing technique which indicates a potential savings of 40 percent in direct production costs and an 18 percent reduction in the final carbon fiber cost because of faster processing speed, reduced processing energy demand, and a higher degree of product quality control. Other efforts focus on developing the new processes needed to recycle advanced materials.

*Advanced Combustion Engines* have the potential to contribute over 40 percent to the total efficiency improvements possible for both passenger and commercial vehicles. The most promising approach to reduce petroleum consumption in the mid-term (10-20 years) is the introduction of high efficiency internal combustion engines in conventional and hybrid vehicles. Our goals are to improve the efficiency of internal combustion engines for passenger applications and commercial vehicles while meeting cost, durability, and emissions constraints. Accelerated research on advanced combustion regimes, including homogeneous charge compression ignition (HCCI) and other modes of low-temperature combustion, is aimed at realizing this



potential and making a major contribution to improving the U.S. energy security, environment, and economy.

In parallel with fuels development, Advanced Combustion Engine research has made significant strides in the development of enabling technology to bring more efficient clean combustion engines into the market. Christina Vujovich, Vice President of Environmental Policy and Product Strategy of Cummins Engine Company, recently commented publicly,

“We have achieved some impressive technology advances to meet the initial engine efficiency and emissions deliverables of the program. . . . The Department of Energy provided an invaluable level of cooperation throughout the program. It demonstrates just how much can be achieved when Federal agencies and industry work together toward a common goal in the best interest of the Nation’s environment and energy security.”

*Fuels Technology* supports research on advanced petroleum and non-petroleum-based fuels and fuel blends to enable extremely high efficiency and the displacement of significant quantities of petroleum fuels. This work is coordinated with our EERE Biomass Program, which is developing technology to convert biomass (plant-derived material) to valuable fuels, chemicals, materials, and power.

The DOE-managed Advanced Petroleum Based Fuels—Diesel Emissions Control Project (APBF-DEC) has provided crucial data supporting the U.S. Environmental Protection Agency rulemaking that is leading to the nationwide introduction of low-sulfur fuel.

#### HYDROGEN PROGRAM

The Department’s Hydrogen Program is developing advanced technologies for producing, delivering, and storing hydrogen, for affordable and reliable fuel cells, and for infrastructure technologies that will support the widespread introduction of hydrogen-powered vehicles. The use of hydrogen will get to the root causes of oil dependency, criteria pollutants and greenhouse gas emissions.

Since the President launched the Hydrogen Fuel Initiative in 2003, we have made significant progress. The Department has developed a comprehensive technology development plan, the *Hydrogen Posture Plan*, fully integrating the hydrogen research of the Offices of Energy Efficiency and Renewable Energy; Science; Fossil Energy; and Nuclear Energy, Science, and Technology. This plan identifies technologies, strategies, and interim milestones to enable a 2015 industry commercialization decision on the viability of hydrogen and fuel cell technologies. Each Office has, in turn, developed a detailed research plan which outlines how the high-level milestones will be supported.

Ongoing research has already led to important technical advances. As highlighted by Secretary Bodman in earlier Congressional testimony, I am pleased to report that our fuel cell activities achieved an important technology cost goal this past year—the high-volume cost of automotive fuel cells was reduced from \$275 per kilowatt to \$200 per kilowatt. This was achieved by using innovative processes developed by national labs and fuel cell developers for depositing platinum catalyst. This accomplishment is a major step toward the Program’s goal of reducing the cost of transportation fuel cell power systems to \$45 per kilowatt by 2010.

In hydrogen production, we have demonstrated our ability to produce hydrogen at a cost of \$3.60 per gallon of gasoline equivalent at an integrated fueling station that generates both electricity and hydrogen. This is down from about \$5.00 per gallon of gasoline equivalent prior to the Initiative.

In the short term, the use of more efficient technologies, such as hybrid vehicles, will mitigate increases in greenhouse gas emissions. In the long term, hydrogen produced from renewables, nuclear, or coal with carbon sequestration can eliminate oil dependency, significantly reduce vehicular criteria air pollutants, and help stop and reverse the growth in greenhouse gas emissions.

I will now briefly describe the activities of the Department to support the President’s Hydrogen Fuel Initiative, which addresses both the development needed for the hydrogen infrastructure and for fuel cell technology.

*Hydrogen Production:* The overall goal is to produce hydrogen in a way that is carbon neutral. To address energy security and environmental needs, an array of feedstocks and technologies such as solar, wind, and biomass, nuclear, and fossil fuels (with sequestration) are being examined for hydrogen production. The research focus for the transition to a hydrogen infrastructure is on distributed reforming of natural gas and renewable liquid fuels, and on electrolysis, to meet initial lower volume hydrogen needs with the least capital investment. Renewable feedstocks and energy sources are being investigated for the long term, with more emphasis on cen-

tralized options to take advantage of economies of scale when an adequate hydrogen delivery infrastructure is in place.

*Hydrogen Delivery:* Hydrogen must be transported from the point of production to the point of use, including storing and dispensing at fueling stations. Due to its relatively low volumetric energy density, delivery can be one of the significant cost and energy inefficiencies associated with using hydrogen as an energy carrier. There are three primary options for hydrogen delivery. One option is to deliver hydrogen as a gas in pipelines or high-pressure tube trailers. A second option is to liquefy it and deliver it in cryogenic tank trucks. Gaseous and liquid truck deliveries are used today, but there is only a very limited hydrogen pipeline infrastructure. A third option is to use carriers such as natural gas, methanol, ethanol, or other liquids derived from renewable biomass, that can be transported to the point of end use and reformed to hydrogen. Further R&D is required for each of these options so that we can reduce cost, improve reliability, and determine the best approach. Carriers are the focus for the nearer term; pipelines and other options are being researched for the longer term.

*Hydrogen Storage* is a critical enabling technology for the advancement of hydrogen and fuel cell power technologies for transportation, stationary, and portable applications. The Department is focused on the research and development of on-board vehicular hydrogen storage systems that will allow for a driving range of greater than 300 miles without compromising passenger or cargo space. Development targets include compressed hydrogen tanks for near-term storage of hydrogen. However, the Program emphasizes R&D on advanced materials such as metal hydrides, chemical hydrides, and carbon-based materials to allow low-pressure hydrogen storage options in the long-term. As progress is made on solid-state or liquid-based materials, other issues such as vehicle refueling, thermal management or byproduct reclamation will need to be addressed.

*Codes and Standards* will be necessary in the implementation of the hydrogen economy. Our DOE codes and standards activity will facilitate their development, and support publicly available research that will be necessary to develop a scientific and technical basis for such codes and standards. DOE is working with the Department of Transportation (DOT) in support of their regulatory role in vehicle safety standards, hydrogen pipelines, and global technical regulations. The DOE and the DOT are working closely together in the International Partnership for the Hydrogen Economy to promote uniform global hydrogen technology codes and standards.

*Safety* is of paramount importance. The development of codes and standards is critical to ensuring the safety of hydrogen production and delivery processes, as well as hydrogen storage technologies for both transportation and stationary applications. Like other fuels in use today, hydrogen can be used safely with appropriate handling and systems design. Because of the smaller size of the molecule and the greater buoyancy of the gas, hydrogen requires storage and handling techniques that are different than those traditionally employed. The aim of our program is to ensure the safe use of hydrogen, and to understand, communicate and provide training on the safety hazards related to the use of hydrogen as a fuel. DOE is working with the DOT as well as other agencies, such as the Environmental Protection Agency, the National Institute of Standards and Technology, and the Department of Agriculture to promote and ensure the development of safe hydrogen and fuel cell technologies.

*Education* is critical to the successful introduction of any new technology. DOE's hydrogen education effort focuses on providing information and training, with a focus on safety, to the specific target audiences involved in the transition to a hydrogen economy, including first responders, code officials, State and local government representatives, and local communities where near-term hydrogen demonstration projects are located. Over the long-term, the program also seeks to raise public awareness and foster the development of university and other education programs that will ensure the next generation of scientists, engineers, and technicians needed to develop and sustain the hydrogen economy.

*Fuel Cells* have the potential to replace the internal combustion engine in passenger vehicles because they are energy efficient, clean and fuel flexible. Hydrogen or any hydrogen-rich fuel can be used by this emerging technology. For transportation applications the focus is on direct hydrogen fuel cells, in which hydrogen is stored on board and is supplied by a hydrogen generation, delivery, and fueling infrastructure. Fuel cell R&D activities address key barriers, including cost and reliability, to fuel cell systems for transportation applications. Activities support the development of individual component technology critical to systems integration, as well as systems-level modeling activities that guide R&D activities, benchmark systems progress, and explore alternate systems configurations on a cost-effective basis.

Polymer electrolyte membrane fuel cell cost projections at high-volume (500,000 units per year) have been reduced from \$275 per kilowatt in 2002 to \$200 per kilowatt in 2005. Performance improvements are based on progress in areas such as electrocatalyst design and materials, which reduce expensive platinum content; gas diffusion layer design, which reduces materials content; and advanced low-cost membranes. Changes in operating conditions have reduced the size of the fuel cell stack, resulting in lower raw materials costs. Manufacturing advances include mold-ede bipolar plates manufactured by a net-shape molding process and economies of scale for membrane manufacturing. These advances set the stage for meeting the \$45 per-kilowatt target for 2010.

*Technology Validation* is conducted on components under real-world operating conditions in integrated systems to quantify the performance and reliability, document any problem areas, and provide valuable information to researchers to help refine and direct future R&D activities.

An example of a project that ties all of the R&D activities together and validates the status of hydrogen and fuel cell technologies is the National Hydrogen Learning Demonstration. The National Hydrogen Learning Demonstration is the first effort of its kind to bring together, at a national level, major automobile and energy companies in a hydrogen infrastructure and vehicle demonstration project. The project will help DOE focus its research and development efforts, provide insight into vehicle and infrastructure interface issues and help address codes, standards and safety issues. We have partnered with four industry teams to work on projects that would assess the status of hydrogen infrastructure and fuel cell technology, in parallel, against time-phased, performance-based targets.

This Learning Demonstration will collect data both on the open road and in controlled testing environments. Field validation of hydrogen-powered fuel cell vehicles in controlled vehicle fleets in both hot and cold climates will provide valuable information. Infrastructure validation also includes hydrogen production, storage and delivery processes, and hydrogen refueling station technologies. Each of these teams is sharing at least 50 percent of the project cost, which is estimated to be about \$350 million between fiscal year 2004 and fiscal year 2009, with the government share subject to appropriation. Information from this demonstration will help DOE focus its R&D efforts on fuel cells and hydrogen production and provide valuable information to industry to make a 2015 commercialization decision. With a positive commercialization decision and a successful research program, it is not unreasonable to think we could see the beginning of mass-market fuel cell vehicle penetration by 2020.

#### BIOMASS PROGRAM

The Department's Biomass Program is the major EERE renewable effort that addresses the development of alternative liquid transportation fuels, namely ethanol and biodiesel. The development of these fuels has a direct bearing on our Nation's ability to reduce imported oil because they can be directly blended into gasoline and diesel fuels. The current domestic industry has the production capacity of about four billion gallons with capacity for almost another billion gallons under construction. Provisions in the conference version of the Energy Bill could provide an incentive to increase this supply to 7.5 billion gallons by 2012.

While the domestic renewable fuels industry has been growing at a rapid pace, there is little doubt that this industry will have a brighter future if R&D at USDA and DOE is successful. A recent report jointly conducted by the two departments indicates that over one billion tons of biomass could one day be sustainably produced from various biomass sources and meet at least 30 percent of today's U.S. transportation demand. In the longer term, when this renewable supply is coupled with advancements projected by the EERE vehicle and hydrogen technologies, a carbon neutral and renewable transportation suite of technologies could greatly reduce our dependence on imported oil.

Recent breakthroughs and accomplishments in ethanol and bio-based products include technologies developed by the National Renewable Energy Laboratory, working with two of the major world industrial enzyme manufacturing companies. In 2004, these public private partnerships won a prestigious R&D 100 Award (shared by the three entities) for developing an innovative, lower cost method for transforming biomass into sugars that could then be fermented to produce ethanol and other chemicals. Before this breakthrough, this conversion step was considered a showstopper for biomass biological conversion.

More recently, there has been a stepped-up interest in combining the forces of DOE's Office of Science with EERE's Biomass Program to address research barriers facing biomass to ethanol technologies. It is believed that some of the fundamental

tools and understanding being considered and developed by the Office of Science can be more directly targeted to the EERE Biomass Program and industry. This synergism could greatly reduce the time needed to make ethanol more economically competitive. The two DOE Offices are currently planning a joint workshop and a joint solicitation to occur before the end of the calendar year.

Biomass represents a bridge to the hydrogen economy. Ethanol and methanol from biomass are both potential hydrogen carriers that can also be used in fuel cells or can directly replace gasoline. Recently, DOE and USDA signed a Memorandum of Understanding aimed at developing more cost-effective ways to produce hydrogen from biomass resources. Transitioning to hydrogen technologies in the agriculture industry and in rural communities is important for a number of reasons: hydrogen could be produced from renewable, farm-based biomass; agricultural vehicles could be fueled by hydrogen; and hydrogen fuel cell technology could potentially provide power for rural communities and remote farm and forest sites.

#### SUGARS PLATFORM R&D

The Sugars Platform involves the breakdown of biomass into raw component sugars that can be fermented to produce a range of chemical and biological processes. The research target for the mid-term is to reduce the cost of sugars from 15 cents per pound in 2003 to 10 cents in 2012. The corn refining industry, which currently includes wet and dry mills, is an example of a sugars-based industry that produces ethanol and other chemicals, as well as food and fiber. Ongoing research tasks in the Sugars Platform include feedstock conditioning, pretreatment, enzyme biomass degradation, process integration, and targeted fundamental research.

#### THERMOCHEMICAL PLATFORM R&D

The Thermochemical Platform's current emphasis is on converting non-fermentable biomass such as lignin to intermediate products such as synthesis gas. These intermediates can be used directly as raw energy, or may be further refined to produce fuels and products that are interchangeable with existing commercial commodities such as oils, gasoline, synthetic natural gas, and high purity hydrogen. Current R&D is focused on synthesis gas clean-up making it suitable for the production of high-valued mixed alcohols.

#### PRODUCTS R&D

The area of bio-based products represents a major market opportunity for domestically grown biomass resources. The Products R&D utilize the outputs from the Sugars and Thermochemical Platforms to develop higher valued products. The Products focus is on platform chemicals that can be converted to a multitude of high-valued products. As an example of success, industrial partners have had a breakthrough in developing a novel microbial process that can convert corn sugars to a chemical intermediate. When fully commercialized, the industrial biotech process will convert dextrose derived from corn to a chemical intermediate known as 3 hydroxypropionic acid (3HP), one of the top chemical intermediates identified by the Biomass Program. The chemicals that can be produced from 3HP include acrylic acid, acrylamide, and 1,3 propanediol. Acrylic acid and its derivatives are used to create a wide range of polymer-based consumer and industrial products such as adhesives, paints, polishes, protective coatings, and sealants. The new process will use agricultural feedstocks instead of petroleum to produce 3HP.

#### INTEGRATED BIOREFINERIES

An integrated biorefinery is the ultimate deployment strategy of the Biomass Program. A biorefinery embodies a facility that uses biomass to make a range of fuels, combined heat and power, chemicals, and materials in order to maximize the value of biomass. Much like an oil refinery, the biorefinery has the flexibility to make adjustments to the quantities of the various products that it makes, depending on fluctuating market conditions. The barriers to an integrated biorefinery are largely addressed through the other R&D areas. However, certain barriers are specific to the integrated biorefinery such as the challenge of feedstock-to-product process integration and the financial, engineering, and marketing risks inherent in scaling up first-of-a-kind, pioneer technology. In fiscal year 2002, the Biomass Program awarded six major biorefinery development projects to industry partnerships (minimum 50 percent cost-share).

When achievement of technical targets justifies industrial-scale demonstrations (again, with a *minimum* 50 percent cost share), the Biomass Program will conduct a competitive solicitation in order to: (1) complete technology development necessary

for start-up demonstration of an integrated biorefinery; and (2) help U.S. industry establish the first large-scale sugars-based biorefinery based on cellulosic agricultural residues by 2010.

#### BENEFITS TO THE NATION

In conclusion, I believe that the Department of Energy is maintaining a balanced portfolio of near-term and long-term options to decrease oil consumption today, and to launch our Nation into a bold new energy future. Gasoline and diesel-hybrid electric vehicles are the most promising technology options over the next two decades, and hydrogen-powered vehicles offer the best potential to achieve long-term energy independence through use of diverse, domestic feedstocks. The Department's plan is ambitious but allows time to overcome the significant technical and economic challenges.

I continue to be excited by the Department's programs in advanced automotive technology and look forward to the security, economic, and environmental benefits that will accrue to our Nation as progress is made. Emissions reduction comes hand-in-hand with putting more efficient vehicles on the road. We estimate that the cumulative savings in oil by 2030 from several aspects of our research, assuming complete technical success, could be almost 20 billion barrels compared to a "business-as-usual" scenario. That's about a trillion dollars at \$50 a barrel, or more at today's prices. Staying at the forefront of vehicle R&D can help keep the United States as the world's leader in vehicle production, provide future exports, protect U.S. jobs, and improve our national energy security.

Mr. Chairman, I look forward to working with you and the Members of this Committee as we pursue our mission of providing for the Nation's energy future by reducing our dependence on foreign oil. I would be pleased to answer any questions you may have.

---

#### PREPARED STATEMENT OF JOE LOPER, VICE PRESIDENT, ALLIANCE TO SAVE ENERGY

The Alliance to Save Energy is a bipartisan, nonprofit coalition of more than 90 business, government, environmental and consumer leaders whose mission is to promote energy efficiency worldwide to achieve a healthier economy, a cleaner environment, and greater energy security. The Alliance, founded in 1977 by Senators Charles Percy and Hubert Humphrey, currently enjoys the leadership of Senator Byron Dorgan as Chairman; Washington Gas Chairman and CEO, James DeGraffenreid, Jr. as Co-Chairman; and Representatives Ralph Hall, Zach Wamp and Ed Markey and Senators Bingaman, Collins and Jeffords as its Vice-Chairs. Attached for the record are a list of the Alliance's Board of Directors and its Associate members.

#### INTRODUCTION

For the last 4 years, Congress and the President have spent innumerable hours trying to agree on ways to address the nation's dependency on oil and its adverse impacts on climate, and air and water quality. There has been much discussion about how we might ease the burdens on states and cities trying to meet Clean Air Act requirements and who is going to pay for leaks from underground gasoline storage tanks. We have debated measures to reduce greenhouse gas emissions. Meanwhile, we've watched oil prices climb from \$30 to \$60 per barrel as oil supplies get rocked almost daily by events that are largely out of our control—Venezuelan uprisings and increased animosity toward U.S. government policies, threatened takeovers of Nigerian oil fields, hurricanes in the Gulf of Mexico.

While we have limited control on oil supplies and prices, we can control our own demand for oil. That makes this hearing particularly important. Given that the transportation sector accounts for two-thirds of U.S. oil use and that passenger cars and light trucks consume 40 percent of that oil use, it is critical that we address vehicle fuel use.

We applaud the efforts of Congress to address the Nation's energy challenges in the current conference energy bill. The tax incentives for hybrid and advanced diesel vehicles, along with technology research and demonstration programs are certainly useful. However, we cannot pretend to think that the bill before Congress will have any significant impact on U.S. petroleum use.

## THE ENERGY BILL

This week the House and Senate will be voting on the conference energy bill. This bill contains many provisions to encourage energy efficiency improvements in buildings and appliances. We applaud Congressional actions to get inefficient air conditioners, clothes washers, ceiling fans and lighting equipment out of the marketplace. We applaud the tax incentives for more efficient homes, buildings and equipment, and those that encourage the production of high-efficiency appliances.

We applaud the tax incentives for hybrid and advanced learn burn technology vehicles. We support funding authorizations for a variety of advanced transportation technology programs that could improve the efficiency of the transportation sector, including programs to encourage railroad efficiency, idle reduction technologies for heavy trucks, and ultra-efficient energy technology for air crafts.

The energy efficiency policies in the energy bill could reduce overall projected energy use by between 1 and 2 percent by 2020. It is important to note, however, that the bill is, in large part, an ambitious to-do list at this point. To achieve these savings, Federal agencies, appropriators, states and local governments, and others will need to fully fund, implement and participate in these programs.

When it came to addressing energy use in vehicles, Congress flat out missed the on-ramp. Most, if not all, of the oil savings in the conference energy bill will be canceled out by the increased energy use resulting from extension of the Corporate Average Fuel Economy (CAFE) credit for dual fuel vehicles. This provision allows vehicle manufacturers to take credit for vehicles that are capable of, but almost never do, run on alternative fuels. Optimistically, we would like to think that the energy bill could reduce oil use in 2020 by about 100,000 barrels per day—about 0.5 percent of anticipated oil use or between 1 and 2 days of consumption. Realistically, the overall impact on petroleum consumption will probably be a fraction of that amount.

## EFFICIENCY TECHNOLOGIES ARE HERE TODAY

There is no shortage of technologies to improve vehicle fuel efficiency. Many of these technologies are already in vehicles, including electronic controls and ignition, light weight materials, improved engine designs. Other technologies are now being pulled off “the shelf” and increasingly deployed in new vehicles. They include (for example):

- Variable Cylinder Management—turns off cylinders when not in use.
- Advanced Drag Reduction—further reduces vehicle air resistance.
- Variable Valve Timing and Lift—optimizes the timing of air intake into the cylinder with the spark ignition.
- Reductions in Engine Friction—using more efficient designs, bearings and coatings that reduce resistance between moving parts.
- Hybrid Drive Trains—internal combustion engine combined with electric motor and regenerative braking.

These are not pie in the sky technologies or expensive gimmicks, but rather technologies that are here now. Other major technology advances appear to be on the horizon, such as plug-in hybrids and fuel cell electric vehicles.

## EFFICIENCY TECHNOLOGIES ARE NOT BEING USED TO IMPROVE FUEL ECONOMY

While advanced technologies have been, and continue to be, deployed in new cars and trucks, we’re not getting more miles per gallon (mpg) as a result. In fact, the average fuel economy (ie., mpg) of model year 2004 vehicles is 6 percent lower than in the 1987–88 model years.

Instead of getting better fuel economy, we are getting more towing capacity, more acceleration, more weight, and more space. For example, America’s best-selling truck—the Ford F-150—claims almost 5 tons of towing capacity. That’s enough capacity to pull a 36-foot horse trailer with 4 horses inside it. In most states, that is one-eighth of the *total* legal weight (including truck and cargo) of a semi-hauler.

Our average car is a real workhorse too. The average passenger car sold today has about 185 horsepower—40 percent more than a car sold 15 years ago. To put this in perspective, a typical passenger car sold today has the engine capacity to raise 185 soccer moms, along with 370 children, 10 stories into the air in 1 minute. It’s about the same horsepower as a large (60,000 pound) bulldozer.

And this decade looks like it could displace the 1960’s as the “Decade of the Muscle Car.” According to the Classic Car and Vintage Automobile registry, more than half of the fastest production car models offered since the 1960’s were offered in model years 2000 or since. The number of muscle cars offered in the last 5 model years exceeds the number of muscle cars in the 1960’s, 1970’s, 1980’s and 1990’s combined.

Vehicle fuel economy is a huge reservoir of low-cost energy waiting to be tapped. According to EPA estimates, if automakers had applied the technology gains since 1987 to improving fuel economy, average fuel economy would be 20 percent higher. If the Nation had taken this path, we could be consuming between one and two million barrels per day less than we are—that's about equivalent to the more optimistic EIA projections of oil output from the Arctic National Wildlife Refuge (ANWR).

#### POLICIES TO INCREASE FUEL ECONOMY

For the last 20 years, the Nation's oil policy has in effect been made in America's car showrooms. It is time for the Federal Government to provide more guidance in the vehicle marketplace. There are many policies that could be employed to ensure at least a portion of these advances gets used to improve fuel economy. A few of them are discussed here.

##### *Increase and Reform Corporate Average Fuel Economy Standards*

Today's supply disruptions are of similar magnitude to the 1970's as OPEC exercised its market power to raise prices. Back then, America's response was to take serious measures to encourage improvements in automobile fuel economy. Between 1975 and 1985, fuel economy standards were used to help achieve a 70 percent improvement in new vehicle fuel economy. According to the National Academy of Sciences, CAFE standards are still saving 2.8 million barrels per day.

Since the mid-1980's, CAFE standards have been largely unchanged due to political pressure from the automobile industry. The current standard of 27.5 miles per gallon (mpg) for automobiles has been in place since 1985. The current 21 mpg standard for light trucks is only 0.5 mpg above the 1987 standard (it is now set to rise to 22.2 mpg by 2007). To the extent that fuel economy standards reflect fuel economy levels achievable two decades ago seriously undermine their effectiveness.

Old testing methods, a loophole for "trucks", and other loopholes have further undermined the effectiveness of existing CAFE standards. EIA estimates that the actual fuel economy of vehicles is about 20 percent lower than the CAFE standard test results suggest. In other words, the 27.5 mpg standard for cars is really a 22 mpg standard and the 21 mpg truck standard is really a 17 mpg standard. Fuel economy testing methods should be revised to better reflect real-world driving.

Fuel economy standards allow vehicles classified as trucks to meet less stringent standards than are imposed on passenger cars. When this loophole was created, less than one-quarter of light duty vehicles sold were classified as trucks. Now, fully half of vehicles sold receive this special designation. Most of these trucks are sport utility vehicles and minivans primarily, if not exclusively, used for transporting passengers. The "passenger car" category should be redefined to include SUVs and minivans.

Vehicle manufacturers receive credit against their fuel economy requirements for sales of "dual-fuel" vehicles that can run on either ethanol or gasoline. This credit has encouraged manufacturers to put millions of dual fuel vehicles on the road. The problem is that they are fueled almost exclusively with gasoline. As noted above, the new conference energy bill extends this credit for at least 5 more years. This credit should be terminated or modified to require actual use of the alternative fuel.

Finally, vehicles up to 10,000 pounds should be subjected to labeling and standards. CAFE standards and labeling requirements apply only to vehicles up to 8,500 pounds gross vehicle weight. Manufacturers are selling more and more of these super-large SUVs and pickup trucks, such as GM Hummers and Ford Excursions. The weight limit should be raised to include these heavier vehicles.

#### TAX INCENTIVES

Tax deductions and credits can help steer buyers toward vehicles with higher fuel economy. There is currently a \$2,000 Federal tax deduction for purchase of a hybrid vehicle (the deduction will be reduced to \$500 in 2006). Importantly, the current deduction does not take into account the vehicle's fuel economy. The buyer of a hybrid vehicle gets a tax deduction regardless of whether the vehicle achieves a small or significant fuel economy improvement.

The energy bill conference report improves on the current Federal incentive, providing tax incentives for hybrid, advanced diesel, fuel cell and alternative fuel vehicles in varying weight classes. The new tax incentives for hybrid vehicle passenger cars and light trucks would be based on two factors: fuel economy improvements over a baseline and lifetime fuel savings. This tax incentive approach can assist in assuring that the hybrids that achieve better fuel economy are receiving the highest level of credit.

In sum, if the policy objective of these tax incentives is to encourage adoption of energy-saving technologies, the tax incentives should ideally be based on fuel economy, not just technologies.

#### GAS GUZZLER TAXES

The Gas Guzzler Tax was established as a result of the Energy Tax Act of 1978. The Act established a tax on the sale of new model year vehicles whose fuel economy fails to meet certain statutory levels. Currently, the gas guzzler tax applies only to passenger cars with fuel economies below 22.5 mpg. The maximum rate is \$7,700, which is applied to cars that achieve a fuel economy value of less than 12.5 mpg. To further discourage purchase of inefficient vehicles, the gas guzzler tax could be revised to (1) increase the amount of the tax; (2) apply the gas guzzler tax to trucks; and/or (3) increase the mpg value so that more vehicles are captured within the tax structure (e.g., instead of starting the tax at 22.5 mpg, the tax could apply to vehicles that achieve an unadjusted mpg of 24.5 mpg).

#### FEEBATES

A national “feebate” would impose a fee or rebate on new vehicles based on the expected lifetime fuel use of the vehicle. The feebate could be revenue neutral or not, depending on where the “set-point” is established; purchasers of vehicles above the set-point (with poor fuel economy) would pay a fee and purchasers of vehicles below the set point (with better fuel economy) would receive a rebate.

Many variations of feebates have been suggested and discussed. The simplest would use a single gallon-per-mile (GPM) rate—say \$500 per 0.01 GPM—and a single set-point for all passenger cars and light trucks.<sup>1</sup> Oak Ridge National Laboratory estimates savings from a \$500 per GPM revenue-neutral (approximately) feebate would increase car fuel economy to 31.8 mpg (13 percent) and light truck fuel economy to 26 mpg (25 percent) after about 6 years. A \$1,000/0.01 GPM feebate would increase car fuel economy to 35.2 mpg (25 percent) and light truck fuel economy to 29.2 (40 percent) after 6 years.

#### SUMMARY AND CONCLUSION

Government and industry have made great strides in developing technologies that can improve the fuel efficiency of the transportation sector (e.g., lightweight materials, variable valve transmissions, electric motors and controllers, low-rolling resistance tires, etc.) Many of these technologies are not, however, being widely used to improve the fuel economy of today’s vehicle fleet; instead, they are being used to increase overall vehicle acceleration, power and size. Without government policy intervention, the next 20 years could be just like the last, with fuel economy being sacrificed to increased acceleration, horsepower, weight and size.

By wisely using the tax code and increasing and reforming CAFE standards, we could begin to see improvements in the fuel economy of vehicles. Despite the arguments of the auto industry, these policies would not deny consumer choice. These policies would simply change the relative price of various vehicle amenities. They would make increased fuel economy less expensive. They would make hot rods and large tow vehicles more expensive. They would make people think about how much car or truck they really need. They would encourage manufacturers to make more vehicles with better fuel economy available to consumers, and then market them.

In sum, improving fuel economy is not a technical challenge—the technologies are here. Rather it is a matter of political priority and will. With the Nation continuing to rely on imported oil from volatile regions of the world, and concerns about the impacts of our oil use on environmental quality and climate, it is increasingly imperative that our Nation translate more of our advancements in vehicle technologies into improvements in fuel economy.

<sup>1</sup>Most economists prefer feebates based on gallons-per-mile (GPM) since this equates to gallons of fuel used by the vehicle. MPG, on the other hand, is not by itself a sufficient parameter to measure efficiency since it is inherently higher for smaller cars and lower for larger vehicles. For example, an increase in a large truck’s fuel economy from 10 MPG (equal to 0.1 GPM) to 12 MPG (0.083) would be rewarded the same as a small car improvement from 40 MPG (0.025) to 80 MPG (0.0125). By contrast, a feebate based on MPG would give 20 times more incentive to the small car with a 40 MPG improvement than the large truck with only a 2 MPG improvement. But over the life of the vehicles, the savings from the 2-MPG improvement in the truck will be far greater than the savings from the small car.



PREPARED STATEMENT OF TOM STRICKER, NATIONAL MANAGER,  
TECHNICAL & REGULATORY AFFAIRS, TOYOTA MOTOR NORTH AMERICA, INC.

Good morning. My name is Tom Stricker, and I am National Manager of Technical & Regulatory Affairs for Toyota Motor North America. I want to thank Chairman Saxton and the Committee for the opportunity to be here today.

Toyota is a company that has undergone a lot of change over the years, especially here in the United States. We have been fortunate to evolve from solely an importer of small economy vehicles to a local producer offering vehicles in virtually every market segment. However, one thing that has *not* changed is our concern for the environment and our pursuit of advanced environmental technology. Our company's Guiding Principles and Earth Charter serve as the fundamental management policy for all our operations. These principles reflect Toyota's commitment to providing clean, safe and innovative products, while respecting the environment and culture of the local communities in which we operate.

In the interest of time, I will focus my remarks on hybrids, diesels and fuel cells. To begin, let me state the obvious: if we want to eliminate reliance on petroleum, then we must develop alternative energy sources to power vehicles or dramatically reduce the energy used by current vehicles. Hydrogen fuel cells are an attractive long-term option because they can dramatically reduce the automobile's environmental footprint—provided the hydrogen can be produced in a clean and efficient way.

Toyota began investing in fuel cell research and development in 1992. Our latest vehicle—the Fuel Cell Hybrid Vehicle or FCHV—has a range of up to 180 miles and a top speed of 96 miles per hour. Fuel is supplied in the form of high-pressure gaseous hydrogen. We currently have 12 vehicles in operation here in the United States and another 11 in Japan. As its name implies, the FCHV utilizes hybrid technology to achieve even greater efficiency than a typical fuel cell. I will discuss hybrid technology more in a few minutes.

Key challenges remain before fuel cells can enter the mainstream market. Some of these challenges, such as fuel cell stack efficiency improvements, system reliability, and so forth, can be solved—in time—through engineering. On the other hand, more fundamental scientific breakthroughs are needed to address on-board hydrogen storage—the critical factor in determining vehicle driving range. While Toyota and many others are working hard to find breakthroughs, no clear solution is in sight.

Even if automakers eventually develop a product that meets customer expectations at reasonable cost, significant challenges remain on fueling and infrastructure. As automakers, there is only so much we can do in this area. Energy suppliers and governments must take the lead—in collaboration with the auto industry—in order to solve these issues.

Because they do offer such promise, Toyota is working hard to develop fuel cells, but we are not certain exactly when the scientific, engineering and production challenges will be solved. We expect to see expanded fleet use by the end of this decade and perhaps limited commercial introduction in the next decade. But as with any technology, whether and how quickly the market accepts fuel cells will depend on our being able to meet customer expectations at a reasonable cost compared to other available alternatives. And as I will describe, those alternatives are improving as well.

One alternative that has garnered a lot of attention recently is diesel engines. No doubt, diesels have advanced rapidly over the past decade by using high-pressure common rail fuel injection, turbocharging, and other advances. And because diesels have higher thermal efficiency than gasoline engines they use less fuel energy per mile. In Europe, diesels now account for about half of new vehicle sales. But, there are several key differences between the United States and European markets.

First, fuel prices in Europe are much higher and tax policies provide a significant price advantage for diesel fuel, while in the U.S. diesel is more expensive than unleaded regular and in some areas more expensive than unleaded premium. In addition, diesel fuel quality, such as cetane level and aromatics content, is better in Europe.

Second, and more importantly, European diesel emission standards are less stringent than gasoline emission standards. In the United States, both diesel and gasoline vehicles are required to meet the same standards. Further, the U.S. standards are more stringent overall compared to Europe. The result is that diesels in Europe do not require the same level of emissions control technology and associated costs that diesels in the United States would require.

But, whether diesels can meet U.S. emission standards remains to be seen. For example, a Corolla-sized vehicle equipped with Toyota's advanced D-CAT diesel cat-

alyst designed for Europe appears to meet EPA Tier 2 Bin 5 emission levels when new. Tier 2 Bin 5 is the level the average new car and truck must meet in 2007. However, our analysis indicates catalyst performance degrades over time, even with ultra-low sulfur diesel fuel, causing emissions to more than double from the U.S. Tier 2 Bin 5 level to the Tier 2 Bin 7 level after 125,000 miles of operation. Besides meeting the basic emission standards, vehicles must also meet requirements under various conditions such as high-altitude, high speed, and cold temperature. These present additional cost and technical challenges.

Given the added cost of emission-control hardware, the lack of diesel fuel price advantage, uncertain customer demand for diesels and—most of all—the challenge of meeting emission standards, the prospect for widespread use of diesels in the United States remains unclear. One thing that is clear—we should not tradeoff public health for energy savings, especially when hybrid technology offers the potential to accomplish both.

As you know Toyota is aggressively pursuing hybrid technology because it can provide increased fuel economy, reduced fuel consumption, cleaner emissions and improved vehicle performance without changes in the fueling infrastructure. Hybrids combine an internal combustion engine with an electric motor and battery. There are several types of hybrids and their differences are important in terms of cost, performance and environmental benefit. The Toyota Hybrid Synergy Drive (HSD) that we market in the United States is a “full” or “strong” hybrid meaning that power is supplied by either the electric motor, the gasoline engine, or a combination of the two. The ability to operate solely on the electric motor is a unique feature of a full hybrid system and is key to achieving exceptional fuel economy. In addition, braking energy is captured and used to recharge the battery—and they never need to be plugged in.

Since we first introduced the Toyota Prius in Japan in late 1997, we have made substantial improvements. The first-generation Prius was a subcompact car EPA-rated at about 42 miles per gallon that met Low Emission Vehicle requirements. Acceleration from 0–60 miles per hour was an unspectacular 14.5 seconds. With each subsequent generation, we have increased the size, performance and fuel economy while lowering tailpipe emissions. The current Prius is a mid-size sedan with an EPA-rated fuel economy of 55 miles per gallon—and it goes from 0–60 in just over 10 seconds. Compared to the average mid-size car, Prius saves about 350 gallons of gasoline per year. Today’s Prius meets Tier 2 Bin 3 emission levels—making it about 50 percent cleaner for smog-forming emissions than the Tier 2 Bin 5 level. A major reason Toyota has focused on gasoline hybrids rather than diesel for the U.S. market is that hybrids provide fuel savings benefits plus there is no question about meeting and even exceeding existing U.S. emissions standards.

And the market has begun to react—sales in 2005 alone equaled the total sales for the previous 4 years. However, despite the relative success, total hybrid sales in the United States still represent just over 1 percent of new vehicle sales.

Earlier this year we introduced two new hybrids. In April we launched the Lexus RX400h SUV—followed in June by the Toyota Highlander Hybrid SUV.

The all-wheel-drive Lexus RX400h combines a 208 horsepower V-6 engine with front and rear electric motors to produce an overall peak of 268 horsepower. The result is a V-6 SUV with acceleration on par with competing V-8 models, yet with an EPA-rated combined fuel economy of 28 miles per gallon—about the same as the average compact car. The RX400h saves about 350–450 gallons of gasoline per year compared to comparable luxury SUV’s. Further, it is certified to Tier 2 Bin 3 emission standards just like Prius. The Toyota Highlander Hybrid is available in either 2 or 4 wheel drive and has similar environmental performance.


We envision a day when consumers can choose a hybrid powertrain option on any vehicle just like they currently choose between 4-cylinder, 6-cylinder and 8-cylinder conventional engines. To that end, we recently announced the upcoming introduction of two new models—the Lexus GS450h luxury sports sedan and the Toyota Camry Hybrid, which will be our first hybrid produced here in the United States—at our Georgetown, KY plant. We expect both of these vehicles to deliver superior fuel economy and improved performance.

The final point I want to make about hybrid technology concerns its applicability to a wide range of future powertrains, including fuel cells. Some view hybrids as a temporary measure to be replaced eventually by fuel cells. We view hybrids as an integral part of the future fuel cell. The only fundamental difference between our current gasoline hybrid system and our FCHV system is that the fuel cell stack replaces the gasoline engine. The hybrid portion of the system remains effectively unchanged. So the battery and control system improvements, production experience and cost reductions we are able to achieve with gasoline hybrids will have direct applicability in the future when fuel cells emerge.

In summary, we view hybrids as a core technology as we pursue sustainable transportation. The reality is that various types of powertrains and fuels are likely to be needed to address energy issues and public health concerns. Which technologies eventually win-out will depend on meeting customer expectations at a reasonable cost and on local market and regulatory conditions.

This concludes my remarks. Thank you for your attention.

Toyota Development Approach

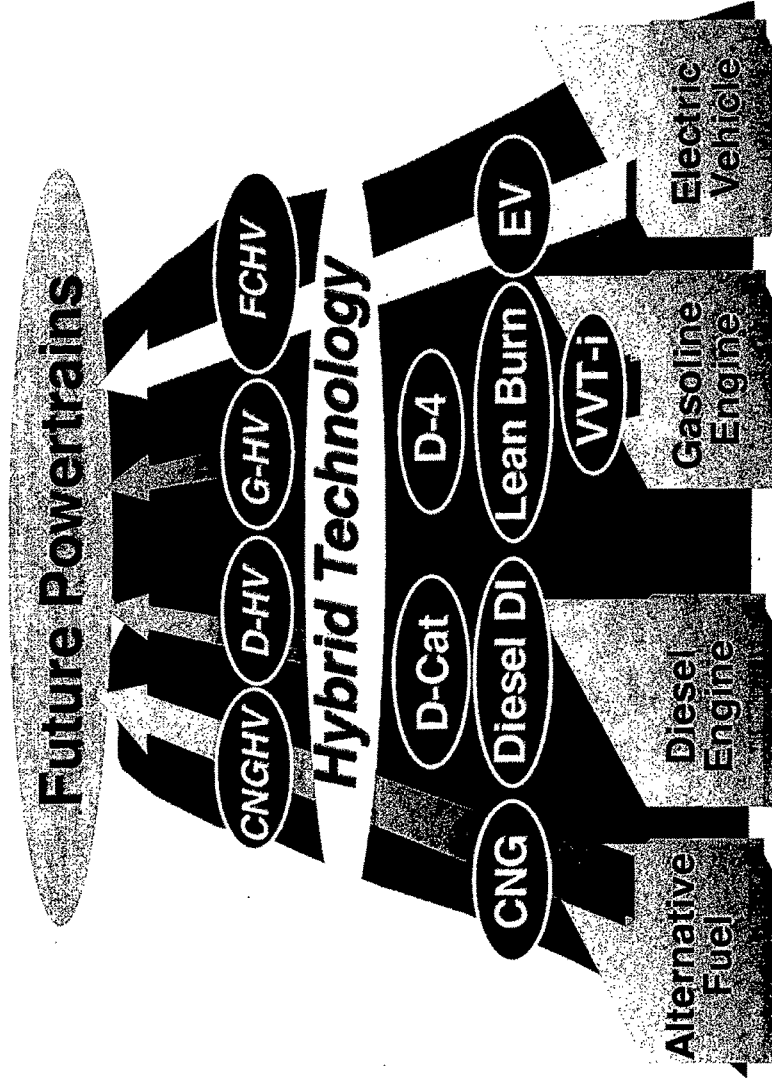

PREPARED STATEMENT OF MARY ANN WRIGHT, DIRECTOR, SUSTAINABLE MOBILITY TECHNOLOGIES AND HYBRID AND FUEL CELL VEHICLE PROGRAMS, FORD MOTOR COMPANY

Members of the Joint Committee:

Thank you for allowing me to address the Committee on this important issue. My name is Mary Ann Wright and I am the Director of Sustainable Mobility Technologies and Hybrid and Fuel Cell Vehicle Programs at Ford Motor Company.

Energy security and rising fuel prices are significant issues facing our nation. I appreciate the opportunity to share with you Ford Motor Company's views on the most promising, advanced vehicle technologies.

Industry, government and consumers all have important roles to play in addressing our nation's long-term energy needs. Industry should continue to invest in the development of energy-efficient technologies that provide cost-effective solutions for our customers. And, government needs to take steps to bring advanced technologies to market more-quickly and cost-effectively through customer incentives.

Ford is committed to improving vehicle fuel economy by developing a portfolio of fuel-efficient advanced technology vehicles. Product solutions to improve fuel economy must result in vehicles that customers can afford and are willing to purchase. We know that when customers consider purchasing a vehicle, they are concerned with vehicle affordability, quality, reliability, performance, safety, appearance, comfort and utility. From our perspective, no one factor can be ignored in the highly competitive U.S. marketplace.

At Ford we're committed to developing better ideas and innovative solutions, and we are investing significant resources to develop advanced vehicle technologies. Henry Ford's vision was to provide affordable transportation for the world. Ford Motor Company's vision for the 21st century is to provide transportation that is affordable in every sense of the word—socially and environmentally, as well as economically. In other words, "sustainable transportation." Offering *innovative technology* that makes a difference for our customers and the world in which they live is not just the right thing to do—it's smart business.

As a result, we're doing substantial development work with renewable fuels and four advanced powertrain technologies, including gasoline-electric hybrids, clean diesels, hydrogen-powered internal combustion engines *and* hydrogen fuel cell vehicles. I'll briefly cover some of our efforts and accomplishments in each of these areas.

We believe that renewable fuels will play an increasingly important role in addressing U.S. energy security and energy diversity. All of our gasoline vehicles are capable of operating on blends including up to 10 percent renewable ethanol. In addition, Ford Motor Company has produced approximately *1.5 million* Flexible Fuel Vehicles capable of operating on up to 85 percent ethanol. Overall, the U.S. auto industry has produced *over 5 million FFVs*. Although the number of E85 vehicles continues to grow, there are only approximately 300 E85 fueling stations in the United States. As U.S. gasoline prices rise, the price of E85 has made it an increasingly attractive option to consumers. We continue to encourage a renewed focus on Federal policies and incentives that accelerate E85 infrastructure development to support flex fuel vehicles.

We are also at the leading-edge of hybrid vehicle development—the Ford Escape Hybrid and Mercury Mariner Hybrid are great examples. Our hybrid SUVs can do virtually anything that our regular Escape or Mariner SUVs can, but with approximately *75 percent* better fuel economy in city driving. But it isn't just a sensible solution or a new technology that led to *56* U.S. patents for Ford, with an additional *83* U.S. patents pending, these are *hot* new products creating a lot of market buzz and the Escape Hybrid was recently named North American Truck of the Year.

Over the next 3 years, we'll have three other hybrids joining the Escape and Mariner—the Ford Fusion, the Mercury Milan, and the Mazda Tribute. Much of what we've learned in developing these hybrids will help us as we explore other advanced technologies. Nevertheless, a key challenge facing hybrids is the incremental costs—both in terms of higher prices for components and engineering investments—that must be overcome for this technology to transition from niche markets to high-volume applications.

Ford is also working on advanced light duty diesel engines. Today's clean diesels offer exceptional driveability and can improve fuel economy by 20–25 percent. This technology is already prevalent in many markets around the world—nearly half of the new vehicles sold in Europe are advanced diesels and Ford continues to accelerate our introduction of diesel applications in these markets. There are, however, many hurdles that inhibit wide-scale introduction of this technology in the United States. We are working to overcome the technical challenges of meeting the ex-

tremely stringent Federal and California tailpipe emissions standards. Remaining issues include fuel quality, customer acceptance and retail fuel availability.

We are also working on what we think is the next step on the road to sustainable transportation—hydrogen-powered internal combustion engines. Ford is a leader in this technology. We think it's a bridge to the development of a hydrogen infrastructure and, ultimately, fuel cell vehicles. Ford recently announced that we will develop hydrogen powered E450 shuttle buses for fleet demonstrations in North America starting next year. Ford is also working on applying this engine technology to stationary power generators and airport ground support vehicles to further accelerate the technology and fueling infrastructure development.

Further down the road, hydrogen powered fuel cells appear to be another promising technology for delivering sustainable transportation. Hydrogen can be derived from a wide range of feedstocks to increase energy diversity, and fuel cells are extremely energy efficient and produce no emissions. Our Ford Focus Fuel Cell vehicle is a state-of-the-art hybridized fuel cell system. We have already placed a small fleet of these vehicles in Vancouver and are working with the U.S. Department of Energy and our program partner BP to deliver vehicles and fueling in California, Florida and Michigan in the near future.

Fuel cells are promising, but there are also tremendous vehicle and infrastructure challenges that must be addressed before they can reach commercial viability. Solutions will require technological breakthroughs and the concerted efforts of government, the auto industry and energy providers.

In conclusion, our objective is simple . . . give consumers more of what they want which is performance, drivability, affordability, utility and a cleaner environment. Advanced vehicle technologies can increase vehicle fuel efficiency without sacrificing these other attributes. We support policies that promote research and development of advanced technologies and the development of renewable fuel sources. In addition, market-based consumer incentives need to be a key element of a coordinated strategy to effectively address sustainable transportation and energy security. Consumer tax credits for advanced vehicles will help consumers overcome initial costs premiums associated with early market introductions; bringing more energy efficient vehicles into the marketplace more-affordably and in higher-volumes.

Ford Motor Company believes that the current U.S. Energy Bill contains many important policies and incentives to address our nation's energy needs and we encourage Congress to pass this legislation.

Thank you again for the opportunity to address the Committee.

---

PREPARED STATEMENT OF MARK CHERNOBY, VICE PRESIDENT, ADVANCED VEHICLE  
ENGINEERING, DAIMLERCHRYSLER CORPORATION

Mr. Chairman and distinguished Members of the Joint Economic Committee, I want to thank you for the opportunity to appear before you today.

I am coming before you today to describe DaimlerChrysler's efforts in developing and implementing alternative technologies for powering automobiles and what we are doing in advanced technologies with respect to the hydrogen economy.

PETROLEUM PRICES REMAIN HIGH

Crude oil prices remain very high, especially in contrast to the lows reached in 1998 and 1999. They are still considerably lower than the peak in real oil prices which was reached in the early eighties. The monthly average price for June was \$57 per barrel and in July oil prices have closed above \$60 on several days. While most analysts think prices have probably peaked, prices are expected to remain above \$50 per barrel for some time. While the consensus outlook for oil prices has continued to move higher, most economists still expect prices to decline steadily from the current price of \$57 per barrel. The consensus is for oil to decline to less than \$50 per barrel next year and with additional declines in the following years.

CURRENT OIL PRICES HAVE LIMITED IMPACT ON CONSUMERS

Despite oil prices consistently much higher than predicted, economic growth has slowed only moderately. The economy and the auto industry seem to be weathering very high oil prices much better than expected. Though it is a near certainty that the economy will slow in the face of both expensive oil and continued central bank rate increases, the slowing appears to be gradual and modest so far. Total vehicles sales through June are about 2 percent above the comparable period in 2004. In addition, the market share of trucks is slightly higher than in the prior year. Based

on the sales data for 2005, consumers do not seem to be altering their purchasing preference due to more expensive oil.

While the economic effects of high oil prices have not had as dramatic effect as originally anticipated, DaimlerChrysler is focused on improving automobile energy efficiency in short-term and long-term and is pursuing a broad portfolio of alternatives.

#### IMPROVING ENERGY EFFICIENCY VIA ALTERNATIVE AND ADVANCED PROPULSION RELATED TECHNOLOGIES

DaimlerChrysler is engaged in a broad range of advanced propulsion technologies. Fuel cell vehicles are a long term focus of this technology portfolio, which also includes efficient gasoline engines, advanced diesels, and hybrid powertrain systems. (See Figure 1: DaimlerChrysler's Advanced Propulsion Technologies)

DaimlerChrysler is focused on providing the market with the ability to select the advanced propulsion technology that best fits the needs of the individual customer. Each of the short term technologies optimizes its benefit to the consumer in specific drive cycles, hence its value to the customer.

DaimlerChrysler has developed and implemented technologies that improve the efficiency of the current gasoline propulsion system. We must continue to enhance the gasoline combustion propulsion system since it will be the dominant choice in the market for many years to come. We offer the Multi-Displacement System (MDS) available in the HEMI in seven Chrysler Group vehicles. MDS seamlessly alternates between smooth, high fuel economy four-cylinder mode when less power is needed and V-8 mode when more power from the 5.7L HEMI engine is in demand. The system yields up to 20 percent improved fuel economy.

We are also working on further development of gasoline direct-injection which considerably enhances fuel economy by closely monitoring fuel atomization.

While enhancements to existing internal combustion engine (ICE) technology offer opportunities for improvements in fuel economy in the short to mid-term, these improvements to ICEs must be accompanied by continuous improvements to the fuels on which they run. Thus, the availability of sulfur-free gasoline and diesel fuels, with other properties tightly controlled is a critical enabler for significant improvements in fuel economy.

DaimlerChrysler offers four different diesel powertrains in the United States, not including heavy trucks. Advanced diesel technology offers up to 30 percent better fuel economy and 20 percent less CO<sub>2</sub> emissions when compared to equivalent gasoline engines. While the fuel economy advantages of some vehicle propulsion technologies, such as hybrids may be limited to, or accentuated in a single mode of driving, an advantage of the diesel engine is that it offers significant fuel economy improvements under all driving conditions. Advanced diesel is a technology that is available today and can help reduce our nation's dependency on foreign oil. According to a J. D. Power and Associates study, light duty diesels are expected to grow from a 3 percent market share in 2004 to 7.5 percent in 2012.

Designing more engines to run on Biodiesel is a current objective at DaimlerChrysler. Biodiesel fuel reduces emissions of diesel vehicles, including carbon dioxide, and lowers petroleum consumption. Each Jeep Liberty Common Rail Diesel (CRD) built by DaimlerChrysler is delivered to customers with B5 biodiesel fuel. Nationwide use of B2 fuel (2 percent biodiesel) would replace 742 million gallons of gasoline per year, according to the National Biodiesel Board. DaimlerChrysler is also investigating the potential use of B20 fuel.

While alternative, renewable fuels such as ethanol or biodiesel offer an attractive opportunity to reduce petroleum dependence, we do not see these fuels completely replacing petroleum in the foreseeable future. Rather, alternative fuels should be seen as pieces in the puzzle which represents the reduction of petroleum dependence. The role of renewable ethanol and biodiesel, and ultimately, renewable hydrogen, should be considered in the context of improved efficiency of conventional gasoline and diesel powertrains, hybrids, and fuel cells. Innovative public policy aimed at reductions in vehicle miles traveled (VMT) can also be part of this equation. DaimlerChrysler has set itself the goal of systematically promoting the development, testing and market launch of renewable fuels.

Rising gasoline prices in the United States have increased the interest in Flexible Fuel Vehicles (FFVs). Chrysler Group has sold nearly 1.5 million FFVs capable of running on E85 (85 percent ethanol), gasoline or a mixture of the two. In total, over 4 million FFVs have been produced by the U.S. auto industry. Internal estimates have calculated that if the current fleet of over 4 million FFVs on the road today was operated on E-85 made from corn using the current fermentation and distillation processes, CO<sub>2</sub> emissions would be reduced by 10 million tons/yr and gasoline

use would be reduced by 130 thousand barrels per day. Shifting to a new process of ethanol production from herbaceous biomass would result in essentially the same petroleum reduction, but CO<sub>2</sub> emissions would be reduced by over 22 million tons/yr. However, there currently is only minimal infrastructure to support vehicles capable of running alcohol based fuels (ethanol and methanol) and the cost for alcohol based fuels is higher than gasoline on an energy equivalency basis. (See Figure 2: Energy and Cost Comparison of Fuels)

DaimlerChrysler and GM have recently combined efforts to develop a two-mode hybrid drive system that surpasses the efficiency of today's hybrids. The partnership will cut development and system costs while giving customers an affordable hybrid alternative that improves fuel economy. The first use of the system by DaimlerChrysler will be in early 2008 with the Dodge Durango.

We are also looking at market niches where alternate technologies can have an impact in reducing our dependence on gasoline for transportation. One such opportunity is the Neighborhood Electric Vehicle (NEV), all-electric, battery-powered vehicles for use in reduced-speed on- and off-road settings. Some 30,000 DaimlerChrysler GEM electric vehicles are in use around the country, mostly for short trips—the kind of trip in which gas-powered vehicles produce most of their emissions.

In addition to the propulsion related activities underway, mentioned above, DaimlerChrysler sees opportunities in using advanced materials as a way to reduce vehicle mass and therefore improve vehicle efficiency. Materials currently being investigated for new or increased vehicular application include: advanced high strength steel, aluminum, composites, titanium, magnesium, and improved alloys for casting. With each of these materials comes the challenge of new joining methods and technologies as well as compatibility with other materials.

#### CONSUMER RESPONSE POTENTIAL FOR ADVANCED AND ALTERNATIVE PROPULSION TECHNOLOGIES

Consumers are rational and will purchase vehicles embodying advanced fuel saving technologies when the purchase makes economic sense. This implies that the added cost of the technology must be less than the net present value of the fuel savings. In this regard, both higher fuel prices and higher tax subsidies for advance technology vehicles make such vehicles more attractive to consumers.

#### LONGER TERM ADVANCED TECHNOLOGIES—DAIMLERCHRYSLER'S EFFORTS TO ADVANCE THE "HYDROGEN ECONOMY"

DaimlerChrysler has been working on fuel cell technology for transportation utilizing hydrogen for over 10 years. We have invested over \$1 Billion in R&D and have developed multiple generations of varying types of vehicles, including five generations of passenger cars (NECAR1, 2, 3, and 4, and the F-Cell). Of all manufacturers, we have the largest worldwide fleet of fuel cell cars and buses (more than 100 vehicles) participating in several international demonstration projects in the United States, Europe, and Asia. (See Figure 3: DaimlerChrysler Fuel Cell History)

As a member of the United States Council for Automotive Research (USCAR), DaimlerChrysler is a partner in the Department of Energy's (DOE) FreedomCAR and Fuel Partnership along with General Motors and Ford Motor Company, and BP America, ChevronTexaco Corporation, ConocoPhillips, Exxon Mobil Corporation, and Shell Hydrogen. The recent addition of these five major energy providers has strengthened the Partnership considerably, by providing expertise to solve the infrastructure challenges. DaimlerChrysler has also been working with the DOE since 1993 on advanced automotive technology research. We support the initiative as members on technical teams related to advanced automotive technology, including:

- Energy Storage
- Light Weight Materials
- Advanced Combustion
- Hydrogen Storage
- Fuel Cell
- Codes & Standards
- Electrical and Electronics
- Vehicle Systems Analysis

Through these tech teams, we help develop priorities based on future needs and manage a portfolio of research projects directed at a set of research goals and objectives.

We also are one of four recipients to participate in the DOE Hydrogen Learning Demonstration Project. By the end of 2005, we will have 30 vehicles located in three ecosystems (Southern California, Northern California, and Southeastern Michigan)



and were the first OEM to provide valuable technical data to the DOE. (See Figure 4: DOE Hydrogen Fleet & Infrastructure Demonstration & Validation Project)

The current technology is being evaluated in several fleet demonstration projects around the world. The largest is the DOE's program in the United States. These programs include a few hundred vehicles worldwide and several hydrogen fueling stations.

DaimlerChrysler projects that the hydrogen fueled vehicle technologies will evolve in discreet phases driven by the following cadence of events:

- Breakthrough in basic research
- Bench/laboratory development
- "On road" testing and development
- Parallel manufacturing process development

Technological breakthroughs are required in hydrogen storage and fuel cell technology (focused on cost & durability). DaimlerChrysler shares a commitment with our partners in the FreedomCAR and Fuel Partnership effort to achieve these gains. It is a challenge to predict a definitive timeline for technological discovery. The vehicle fleet could grow to tens of thousands if significant shifts occur in the infrastructure and value to the consumer. The infrastructure must expand to a much larger scale beyond local support. This will be critical to support the freedom to travel that consumers will demand when we move from a market dominated by local "fleet" customers to the average consumer.

High volume commercialization will require a highly distributed infrastructure capable of delivering cost competitive hydrogen and fuel cell powered vehicles that can compete with other fuel efficient technologies. It is likely that this will require continued government policy support for vehicle and fuel. Additionally, transitioning the manufacturing sector and supply base will require large investments in both time and resources. Along with DOE and the Department of Commerce, DaimlerChrysler is participating in identifying and addressing the most significant issues associated with this transition.

In addition to the technology challenges identified above, the cost challenges are significant barriers. To realize large scale market penetration, we will have to approach the value that customers enjoy with current propulsion technologies.

Even with a viable vehicle, the hydrogen economy will not become a reality without a highly distributed infrastructure. Our energy partners in the FreedomCAR and Fuel effort are committed to the research and technology development required to realize this goal. Industry and government will need to work together to develop an implementation plan with financial viability for all entities.

Due to the enormity of the transition to a hydrogen economy, DaimlerChrysler actively participates in the FreedomCAR and Fuel Partnership. The research required to solve the technical challenges of the hydrogen economy is universally viewed as "high risk" by industry. The enabling, pre-competitive research sponsored by DOE through the FreedomCAR and Fuel Partnership is very important to the industry and is focused on overcoming the aforementioned challenges. These challenges can not be solved by any one company, industry or country. As a global company we also support DOE's participation in the IPHE and other activities around the world to address these challenges.

#### THE PATH TO THE FUTURE—ADVANTAGES OF DEVELOPING ADVANCED VEHICLE TECHNOLOGIES FOR MORE TRADITIONAL PROPULSION SYSTEMS

As stated earlier, DaimlerChrysler is working on a broad portfolio of technologies to improve the efficiency and environmental impact of transportation. In the short-term we continue to improve the internal combustion engine (ICE). In the mid-term we are developing hybrid vehicles utilizing electric drive systems, integrated power modules and advanced batteries. In the long term fuel cell vehicles with on-board hydrogen storage from a national hydrogen infrastructure will emerge.

The current portfolio of R&D within the DOE's FreedomCAR and Fuel Initiative is focused on the long term hydrogen vision, but many of the technologies are useful and will mature in the shorter term as transition technologies. Cost effective, lightweight materials can be applied to vehicles in the short term to improve fuel efficiency regardless of the propulsion technology. Advanced energy storage and motors will benefit both hybrid and fuel cell vehicles. Novel approaches to hydrogen storage are uniquely required by hydrogen fueled vehicles, but can support stationary and portable applications in the industrial and consumer markets.

It is important to advance and mature many of the aspects of the technology as early as possible. There are many challenges and breakthroughs needed to realize the President's vision of a "Hydrogen Economy". (See Figure 5: Technology Relationship Strategy)

Figure 1: Some of DaimlerChrysler's Advanced Propulsion Technologies

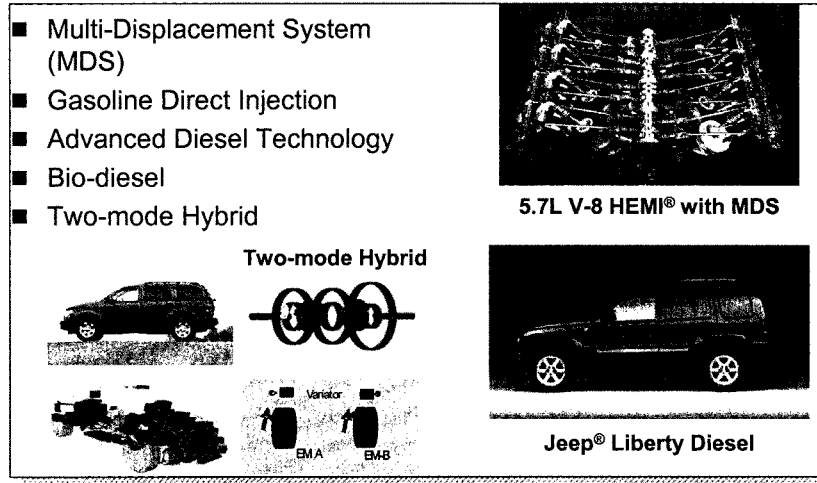


Figure 2: Energy and Cost Comparison of Fuels

Fuel	Volumetric Energy Density (BTU/gal)	Gravimetric Energy Density (BTU/lb)	Cost (\$)*	Cost \$/Gasoline Gallon Equivalent
Gasoline	115,000	18-19,000	2.32/gal	1.00
Diesel	128,400	18-19,000	2.39/gal	0.93
E85	82,000	12,550	1.85/gal	1.11
Hydrogen	**	51,500	1.20/lb	7.50***

\* Current retail prices, including taxes, except for hydrogen, which is a wholesale price

\*\* The volumetric energy density for hydrogen is dependent on the form of storage (5,000 psi, 10,000 psi, liquid, or as metal hydrides).

\*\*\* If hydrogen were produced in transportation fuel quantities, forecasters suggest its cost for gasoline gallon equivalent would approach 1.

Figure 3: DaimlerChrysler Fuel Cell History

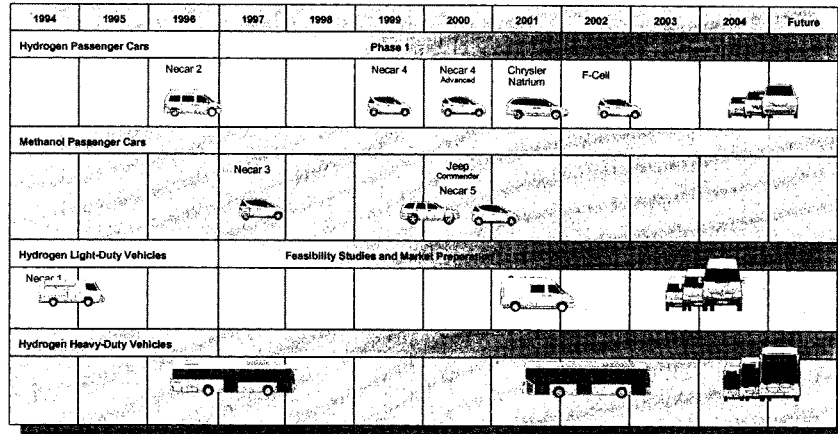


Figure 4: DOE Hydrogen Fleet & Infrastructure Demonstration & Validation Project


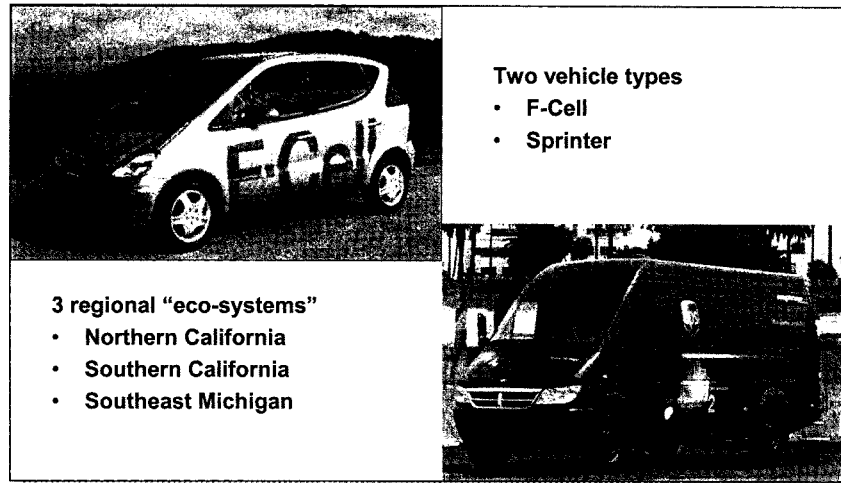


Figure 5: Technology Relationship Strategy



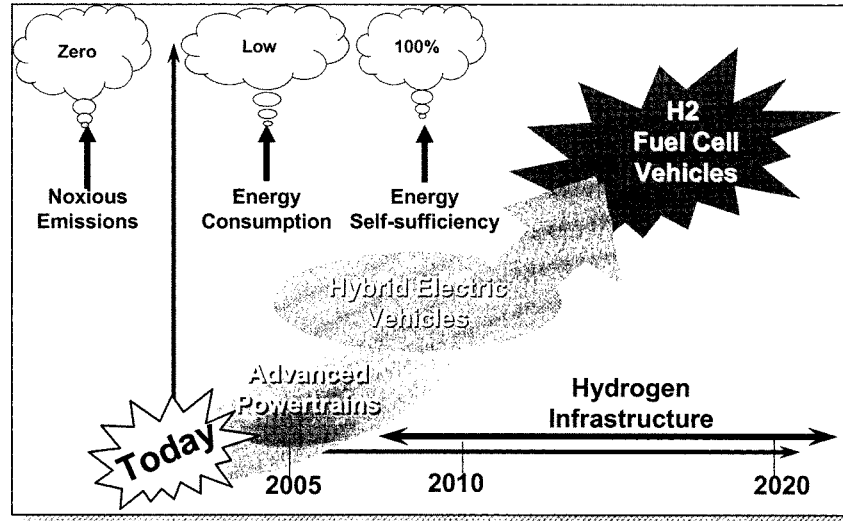

**Dan R. Brouillette**  
Vice President  
Governmental Affairs

1350 I Street NW  
Washington, DC 20005 USA

August 16, 2005

The Honorable Jim Saxton  
Chairman, Joint Economic Committee  
U.S. House of Representatives  
Washington, DC 20515

Dear Mr. Chairman:

During the July 28, 2005, Joint Economic Committee Hearing on "Alternative Automotive Technologies and Energy Efficiency" our technology expert, Mary Ann Wright, was asked to state Ford's position on the National Highway and Safety Administration's (NHTSA) CAFE program. Not being her area of expertise, Ms. Wright promised that Ford would respond to the Committee's question in writing, which can be found below.

Ford Motor Company is committed to improving the fuel economy of our vehicles. As you know, we offer U.S. consumers the only American-made full hybrid-electric vehicles – the Ford Escape Hybrid and the Mercury Mariner Hybrid SUVs. We are very proud of these energy-efficient, advanced technology vehicles, and we have plans to introduce three additional hybrids by 2008.

Regarding CAFE, NHTSA has initiated a rulemaking to reform the current CAFE program with the goals of reducing its inequities and improving its effectiveness, and evaluating future maximum feasible standards. We support these efforts and continue to work cooperatively with NHTSA during the rulemaking process. Later this summer, NHTSA is expected to release the details of the program reforms in a Notice of Proposed Rulemaking (NPRM). Ford Motor Company will fully evaluate the proposed new system and analyze its impact on our product and technology plans.

Thank you for inviting us to participate in the July 28 hearing and for allowing us to respond to the Committee's question.

Sincerely,

A handwritten signature in black ink that reads "Dan Brouillette".  
Dan Brouillette





**Department of Energy**  
Washington, DC 20585

September 27, 2005

The Honorable Jim Saxton  
Chairman  
Joint Economic Committee  
U.S. House of Representatives  
Washington, DC 20515

Dear Mr. Chairman:

On August 25, 2005, we sent you the edited transcript of the July 28, 2005, testimony given by David Garman, Under Secretary, regarding "Alternative Automotive Technologies and Energy Efficiency."

Enclosed are two inserts requested by you and Representative Hinchey for the hearing record.

If we can be of further assistance, please have your staff contact our Congressional Hearing Coordinator, Lillian Owen, at (202) 586-2031.

Sincerely,

A handwritten signature in black ink, appearing to read "Jim L. Sigal".

Jim L. Sigal  
Assistant Secretary  
Congressional and Intergovernmental  
Affairs

Enclosures



RESPONSES BY DAVID K. GARMAN TO HON. JIM SAXTON, CHAIRMAN,  
HOUSE JOINT ECONOMIC COMMITTEE

According to the National Ethanol Vehicle Coalition, there are 6.75 million flexible fuel vehicles on the road in the United States. That is approximately 3.2 percent of the 209,624,000 light duty trucks and cars in 2002. Five manufacturers currently supply 24 different models to the U.S. market.

RESPONSE BY DAVID K. GARMAN TO HON. MAURICE D. HINCHEY,  
U.S. REPRESENTATIVE

A number of studies have recently been conducted which address the question of how much energy is needed to produce a gallon of ethanol. Calculations of the energy inputs required for ethanol production and distribution include energy used throughout the process: the energy expended to grow and harvest the corn, transport the corn to the ethanol plant, convert the corn to ethanol and other products, and transport the ethanol to refueling stations. Agricultural inputs include the energy used to produce and transport fertilizers and pesticides, the fuel used in tractors and other farm equipment, and the energy needed for irrigation.

A commonly used metric for evaluating ethanol production is the fossil energy balance, which is the ratio of the energy out (the energy in a gallon of ethanol) to the fossil energy inputs (the fossil energy used to produce the gallon of ethanol). A 2004 study by the U.S. Department of Agriculture (USDA) (Ref. 1) concluded that approximately 600,000 Btus of fossil energy are used to produce about one million Btus of corn ethanol, resulting in a 1.67 fossil energy balance. A 2005 study led by General Motors (Ref. 2) used the Argonne National Laboratory (ANL) Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) model to calculate fossil fuel inputs to produce or transport ethanol. The GREET model estimated that roughly 760,000 Btus of fossil energy are used to produce about one million Btus of corn ethanol. The fossil energy balance is 1.32.

The report (Ref. 3) by Professors David Pimentel (Cornell University) and Tad Patzek (University of California) estimated that roughly 1.2 million Btus of fossil energy are used to produce about one million Btus of corn ethanol. The energy balance for the Cornell report is 0.833. The differences between the Cornell energy balance and the USDA and ANL energy balances are due primarily, but not entirely, to different assumptions for energy inputs. Energy consumption in agriculture and ethanol production has decreased significantly over the past 15 years. Professor Pimentel uses energy consumption data that are less updated than the data used in the USDA and ANL studies. In addition, the Cornell study also included several energy input categories not included in the USDA and ANL studies—the energy used to manufacture farm equipment and construct the ethanol plant, and the caloric energy consumed by workers.

By comparison, accounting for the energy expended for oil extraction and gasoline refining, roughly 1.238 million Btus of fossil energy are needed to produce 1 million Btus of gasoline. Comparing the gasoline energy balance to the USDA and ANL corn ethanol energy balances, the fossil energy requirements for corn ethanol are about 48 and 60 percent, respectively, of those of gasoline. Most of the fossil energy inputs for corn ethanol are natural gas and coal. The GREET model estimates that approximately 90,000 Btus of petroleum are used to produce one million Btus of corn ethanol. That is, about 90 percent less petroleum is used to produce a Btu of ethanol than a Btu of gasoline.

With the exception of the 2005 Cornell study and previous Cornell studies, nearly all studies conducted from 1994 on show positive energy balances for corn ethanol. A 2005 presentation by Dr. Michael Wang of ANL (Ref. 4) discussed some of the key differences in assumptions used in the ANL and Cornell studies. Driven by economics, ethanol plant operators have cut down on energy consumption and their plants are significantly more efficient than a dozen years ago.

Ethanol plants also produce animal feed products from the corn feedstock, and some of the energy inputs should be allocated to these co-products. The most common ways for calculating co-product credits are the displacement and energy methodologies. For the displacement methodology, the co-product credit is based on the energy used to produce the comparable animal feed product being substituted for (displaced). For the energy methodology, the energy used to produce the ethanol and co-products are accounted for separately. The Cornell study estimated a lower co-product credit for the animal feed than the USDA and ANL studies, another cause of the difference in results between the Cornell studies and the other studies.

## REFERENCES

1. Shapouri, H., et al. *The 2001 Net Energy Balance of Corn-Ethanol*, USDA, 2004.
2. Brinkman, N., Wang, M., Weber, T., and Darlington, T., *Well-to-Wheels Analysis of Advanced Fuel/Vehicle Systems—A North American Study of Energy Use, Greenhouse Gas Emissions, and Criteria Pollutant Emissions*, General Motors Corp. Report, May 2005.
3. Pimentel, D. and Patzek, T., *Ethanol Production Using Corn, Switchgrass, and Wood; Biodiesel Production Using Soybean and Sunflower*, *Natural Resources Research*, Vol. 14, No. 1, March 2005, Pages 65–76.
4. Wang, M., *The Debate on Energy and Greenhouse Gas Emissions Impacts of Fuel Ethanol*, Argonne National Laboratory, August 3, 2005.



## Reference 1

### THE 2001 NET ENERGY BALANCE OF CORN-ETHANOL

Hosein Shapouri\*, U.S. Department of Agriculture (USDA), Office of the Chief Economist (OCE), 300 7<sup>th</sup> Street SW., Room 361, Washington, D.C. 20024, telephone: 202 401 0531, James Duffield, USDA/OCE, Andrew McAloon, USDA/Agricultural Research Service (ARS), Eastern Regional Research Center, 600 East Mermaid Lane, Wyndmoor, PA. 19038, and Michael Wang, U.S. Department of Energy, Center for Transportation Research, Energy Systems Division, Argonne National Laboratory, 9700 South Cass Avenue, Argonne, IL. 60439

#### ABSTRACT

This report estimates the net energy balance of corn ethanol utilizing the latest survey of U.S. corn producers and the 2001 U.S. survey of ethanol plants. The major objectives of this report are to improve the quality of data and methodology used in the estimation. This paper also uses ASPEN Plus, a process simulation program, to allocate total energy used to produce ethanol and byproducts. The results indicate that corn ethanol has a positive energy balance, even before subtracting the energy allocated to by products. The net energy balance of corn ethanol adjusted for byproduct credits is 27,729 and 33,196 Btu per gallon for wet- and dry-milling, respectively, and 30,528 Btu per gallon for the industry. The study results suggest that corn ethanol is energy efficient, as indicated by an energy output/input ratio of 1.67.

**Keywords:** Corn-ethanol, energy inputs, dry-and wet-milling, net energy balance

#### INTRODUCTION

USDA's net energy balance of corn-ethanol was published in 1995, 2002, and 2003 in the American Society of Agricultural Engineers (ASAE), Shapouri et al. Since 1970, many authors have studied the net energy balance of corn-ethanol. The major objective of this report is to improve the general estimation procedure. These improvements include: (1) regular updating of the estimates based on the latest data on corn production and corn yield, (2) improving the quality of estimates for energy used in manufacturing and marketing nitrogen fertilizer, (3) improving the quality of estimates for energy used to produce seed-corn, and (4) enhancing the methodologies used in allocating the energy used in ethanol production (to byproducts and ethanol). In contrast to three previous studies, all energy inputs are reported in low-heat value (LHV).

During the past 2 years, David Pimentel, 2003, Tad Patzek, 2003, and Andrew Ferguson, 2003, criticized USDA's studies of the net energy balance of corn ethanol. It is argued that USDA underestimates energy used in the production of nitrogen fertilizer and the energy used to produce seed-corn, over estimating the energy allocated to produce corn-ethanol byproducts. They also argued that USDA excludes energy used in corn irrigation and secondary energy inputs used in the production of corn, such as farm machinery and

equipment and cement, steel, and stainless steel, used in the construction of ethanol plants.

### THE NET ENERGY BALANCE

This paper, unlike the Dr. Pimentel report, 2003, is based on straightforward methodology and highly regarded quality data from the 2001 Agricultural Resource Management Survey (ARMS), Economic Research Service, ERS/USDA, 2001 Agricultural Chemical Usage, and 2001 Crop Production, National Agricultural Statistics Service, NASS/USDA, and the 2001 survey of ethanol plants.

Direct energy used on farms, such as gasoline, diesel, LP gas (LPG), natural gas, and electricity, for the production of corn, including irrigation by States from 2001 ARMS, are available on the ERS Web site. The number of seed-corn planted per acre in 2001, custom work expenditure, tons of lime used per acre, and purchased water were also from the 2001 ARMS. Quantities of fertilizers and pesticides used per acre of corn in 2001 were published by NASS. Although corn is produced in every State, we focused our analysis on the major corn-producing States: Illinois, Indiana, Iowa, Minnesota, Nebraska, Ohio, Michigan, South Dakota, and Wisconsin. In 2001, these nine States accounted for 79 and 92 percent of U.S. corn and ethanol production, respectively.

Corn yield is a critical part of the net energy balance estimation. Although the corn yield has been rising over time, the annual variation is very volatile. Therefore, we used a 3-year average yield instead of the average yield for the survey year. The 2000-02 weighted average corn yield in each State was used to convert farm inputs from a per acre basis to a per bushel basis (2001 Crop Production, NASS). Table 1 shows the nine-State energy input data per acre of corn and nine-State weighted average for the 2001 ARMS.

Table 1—Energy-related inputs used to grow corn in nine States and nine-State weighted average, 2001

		IL	IN	IA	MN	NE	OH	MI	SD	9-State Weighted average	
Yield 2000-02 average	Bushels/acre	146.31	141.85	152.06	144.35	133.66	125.8	114.78	105.82	131.48	139.34
Seed	Kernels/acre	29158	28281	29855	30816	26619	28934	27867	25270	29860	28739
Fertilizer:											
Nitrogen	pounds/acre	154.53	147.33	125.04	113.74	131.73	168.3	125.52	109.09	106.6	133.52
Potash	pounds/acre	116.81	132.32	68.72	61.82	21.14	112	102.1	31.99	56.01	88.2
Phosphate	pounds/acre	80.88	67.28	57.32	46.31	35.18	67.39	50.06	45.54	37.43	56.81
Lime	pounds/acre	20	20	20	0	0	20	20	0	60	15.67
Energy:											
Diesel	Gallons/acre	3.7	4.6	4.6	5.4	12.4	4.3	7.2	4.4	7.4	6.85
Gasoline	Gallons/acre	1.5	2.1	1.2	1.7	2.1	1.6	2.5	1.5	1.4	3.4
LPG	Gallons/acre	2.8	3.2	7.2	8.5	4.1	5.6	3.6	0.5	1.9	3.42
Electricity	kWh/acre	9.6	28.3	16.8	26.8	152.5	10	25.5	27.4	6.6	33.59
Natural Gas	Cubic ft/acre	76.9	144.2	0	45.8	964	164	223.1	7	124	245.97
Custom work	Dol./acre	13.45	7.8	9.9	8.58	7.93	8.29	9.8	9.3	15.26	10.12
Chemicals	Pounds/acre	3.28	3.19	2.84	2	2.17	3.7	3.15	1.83	2.17	2.66
Purchased water	Dol./acre	0	0	0	0	1.2	0	0	0	0	0.18

Source: USDA, Economic Research Service and Office of Energy Policy and New Uses.

In previous studies, we assumed that energy used to produce seed-corn is equal to 1.5 times the energy used to produce corn. The review of literature and comments on our reports indicated that seed-corn production requires more energy because the seed-corn yield per acre is low and requires a considerable amount of electrical energy to process seed-corn including drying, shelling, grading, cleaning and storage. Based on an unpublished report prepared by Michael Graboski, 2002, for the National Corn Grower Association, the energy required for growing and processing seed-corn is estimated at 4.7 times that required for production of corn. The factor of 4.7 is used in this study.

The amount of energy used to produce a pound of nitrogen has been estimated in several studies. The values range from 18,392 Btu of high heat value (HHV) per pound, Shapouri et al, 2002, to over 33,590 Btu LHV per pound, Pimentel 2003. For this report, we asked Keith Stokes, President of the Stokes Engineering Company and fertilizer expert, to estimate the energy used in the production of nitrogen, phosphate, and potash fertilizers. His estimates of energy used (LHV) to make and deliver nutrients are 24,500 Btu per pound of N, 4,000 Btu per pound of  $P_2O_5$ , and 3,000 Btu per pound of  $K_2O$ .

The energy used to produce herbicides and insecticides are from Wang et al.1999, the Greenhouse Gas Regulated Emissions and Energy Use in Transportation (GREET) model, Argonne National laboratory. More than 153,000 Btu of energy is required to produce a pound of herbicides, and about 158,000 Btu of energy is required to produce a pound of insecticides. A weighted average of over 154,000 Btu of energy is used per pound of pesticides. Farm-related energy inputs are converted per bushel and then to Btu of energy per bushel of corn by multiplying each input by its LHV. The energy required for hauling these inputs to farms, excluding fertilizer, was also estimated. The energy used to produce fertilizers includes energy used to deliver fertilizer to farm. The total energy requirements for farm inputs are given in Table 2.

The energy associated with transporting the corn from local storage facilities to ethanol plants was estimated by the GREET model. The average energy used for transporting a bushel of corn was 5,636 Btu or about 2,120 Btu per gallon of ethanol.

Ethanol production facilities include both dry- and wet-milling operations. Dry mills are usually smaller than wet mills and are built primarily to produce ethanol. Wet mills are bio-refineries and produce a wide range of products such as ethanol, high fructose corn syrup (HFCS), starch, food and feed additives, and vitamins. Thermal and electrical powers are the main types of energy used in both types of processing plants. Wet mills usually generate both electrical and thermal energy from burning natural gas or coal. Dry mills use natural gas to produce steam and purchase electricity from a utility.

The energy used to convert corn to ethanol is based on a U.S. survey conducted in 2001 by BBI International. On the average, dry mill ethanol plants used 1.09 Kwh of electricity and about 34,700 Btu of thermal energy (LHV) per gallon of ethanol. When energy losses to produce electricity and natural gas were taken into account, the average dry mill ethanol plant consumed about 47,116 Btu of primary energy per gallon of ethanol produced. Wet mill ethanol plants that participated in the survey used 49,208

Table 2--Total energy requirements of farm inputs for nine State and nine-State weighted average, 2001

	IL	IN	IA	MN	NE	OH	MI	SD	WI	9-State Weighted average
	BTU/bushel									
Seed	525	557	451	512	804	780	827	623	548	603
Fertilizer:										
Nitrogen	25876	25446	20147	19305	24146	32764	26792	25257	19864	23477
Potash	2395	2798	1356	1285	474	2670	2669	907	1278	1899
Phosphate	2211	1897	1508	1283	1053	2142	1745	1721	1139	1631
Lime	76	79	73	0	0	89	97	0	255	63
Energy:										
Diesel	3853	4941	4609	5700	14136	5207	9558	6336	8576	7491
Gasoline	1478	2135	1138	1698	2266	1834	3141	2044	1536	3519
LPG	1644	1938	4067	5058	2635	3823	2694	406	1241	2108
Electricity	614	1868	1035	1739	10685	744	2081	2425	470	2258
Natural Gas	550	1063	0	332	7544	1363	2033	69	986	1846
Custom work	2001	1197	1417	1294	1291	1434	1859	1913	2526	1581
Chemicals	3453	3464	2877	2134	2501	4530	4227	2664	2542	2941
Purchased water	0	0	0	0	946	0	0	0	0	136
Input hauling	143	167	178	176	242	209	254	121	251	202
<b>Total</b>	<b>44821</b>	<b>47551</b>	<b>38856</b>	<b>40516</b>	<b>68723</b>	<b>57590</b>	<b>57977</b>	<b>44486</b>	<b>41212</b>	<b>49753</b>

Btu per gallon of natural gas and coal, on average, to produce steam and electricity in the plants. After adjustments for energy losses to produce natural gas and coal, on the average, a wet mill ethanol plant used 52,349 Btu of energy to make a gallon of ethanol.

The average energy associated with the transport of ethanol from ethanol plants to refueling stations was estimated by the GREET model. The average energy used for transporting a gallon of ethanol was 1,487 Btu per gallon for both dry and wet milling.

The production of ethanol comes with a range of byproducts, such as distillers dried grains with soluble (DDGS) in the dry milling operation, and corn gluten feed (CGF), corn gluten meal (CGM), and corn oil in the wet milling process. The energy used to produce corn and convert corn to ethanol, including hauling corn from farms or grain elevators to ethanol plants, should be allocated to ethanol and byproducts.

In the previous studies, we used a replacement method to allocate total energy to ethanol and byproducts. For this report, we used ASPEN Plus, a process simulation program, to allocate the energy used in the plants to ethanol and byproducts. On the average, 59 and 64 percent of the energy used to convert corn to ethanol is allocated to ethanol in dry- and wet-mills respectively.

Energy is used to produce and transport corn to ethanol plants allocated to starch and other corn kernel components, such as fiber, germ, and protein. Only starch is converted to ethanol. On the average, starch accounts for 66 percent of the corn kernel weight (15 percent moisture). Therefore, 66 percent of energy used to produce and transport corn to ethanol plants is allocated to ethanol and 34 percent to byproducts.

Energy used in the production of secondary inputs, such as farm machinery and equipment used in corn production, and cement, steel, and stainless steel used in the

construction of ethanol plants, are not included in our study. Available information in this area is old and outdated. Pimentel, in his latest report (2003), used the 1979 Slesser and Lewis to estimate the energy used in the production of steel, stainless steel, and cement.

## RESULTS

All energy inputs used in the production of ethanol is adjusted for energy efficiencies developed by GREET model. The estimated energy efficiencies are for gasoline (80.5 percent), diesel fuel (84.3 percent), LPG (98.9 percent), natural gas (94 percent), coal (98 percent), electricity (39.6 percent), and transmission loss (1.087 percent). After adjusting the energy inputs by these energy efficiencies, the total estimated energy required to produce a bushel of corn in 2001 was 49,753 Btu.

Table 3 summarizes the input energy requirements, by phase of ethanol production on a Btu per gallon basis (LHV) for 2001, without byproduct credits. Energy estimates are provided for both dry- and wet-milling as well as industry average. In each case, corn ethanol has a positive energy balance, even before subtracting the energy allocated to byproducts.

Table 4 presents the final net energy balance of corn ethanol adjusted for byproducts. The net energy balance estimate for corn ethanol produced from wet-milling is 27,729 Btu per gallon, the net energy balance estimate for dry-milling is 33,196 Btu per gallon, and the weighted average is 30,528 Btu per gallon. The energy ratio is 1.57 and 1.77 for wet- and dry-milling, respectively, and the weighted average energy ratio is 1.67.

Table 3--Energy use and net energy value per gallon without coproduct energy credits, 2001

Production process	Milling process		Weighted average
	Dry	Wet	
	Btu per gallon		
Corn production	18875	18551	18713
Corn transport	2138	2101	2120
Ethanol conversion	47116	52349	49733
ethanol distribution	1487	1487	1487
Total energy used	69616	74488	72052
Net energy value	6714	1842	4278
Energy ratio	1.10	1.02	1.06

Table 4--Energy use and net energy value per gallon with coproduct energy credits, 2001


Production process	Milling process		Weighted average
	Dry	Wet	
	Btu per gallon		
Corn production	12457	12244	12350
Corn transport	1411	1387	1399
Ethanol conversion	27799	33503	30586
ethanol distribution	1467	1467	1467
Total energy used	43134	48601	45802
Net energy value	33196	27729	30528
Energy ratio	1.77	1.57	1.67

## REFERENCES

- Ferguson, A. 2003. *Implication of the USDA 2002 Update on Ethanol from Corn*. Vol.3, No 1. Manchester, UK.: The Optimum Population Trust.
- Graboski, Michael. 2002. *Fossil Energy Use in the Manufacturing of Corn Ethanol*. Denver, CO.: Colorado School of Mines.
- Patzek, Tad. & CE24 Freshman Seminar Students. 2003. *Ethanol from Corn: Clean Renewable Fuel for the Future, or Drain on our Resources and Pockets? Vol. 12, No. 2*, Netherlands.: *Natural Resources Research*, Kluwer Academic Publishers.

- Pimentel, David. 2003. *Ethanol Fuel: Energy Balance, Economics, and Environmental Impacts are Negative*. Vol.12, No.2.: 2003 International Association for Mathematical Geology, Natural Resources Research,
- Shapouri, H., J.A. Duffield, and M. Wang. 2003. *The Energy Balance of Corn Ethanol Revisited*.: 2003 American Society of Agricultural Engineers, Vol.46 (4): 959-968.
- Shapouri, H., J.A. Duffield, and M. Wang. 2002. *The Energy Balance of Corn Ethanol: An Update*. AER-814. Washington, D.C.: USDA Office of the Chief Economist.
- Shapouri, H., J.A. Duffield, and M.S. Graboski. 1995. *Estimating the Net Energy Balance of Corn Ethanol*. AER-721. Washington, D.C.: USDA Economic Research Service.
- Stokes, Keith. 2004. *Estimate of Energy Used to Make and Deliver N, P, and K Fertilizer to the Farm Gate*. Weston, CT.: 2004 Special Reports for the USDA/OCE, Stokes Engineering Company.
- USDA-ERS. 2001. *Commodity Costs and Returns, Energy Use on Major Field Crops in Surveyed States*. Washington, D.C.: *USDA Economic Research Service*.  
[www.ers.usda.gov/Data/CostsAndReturns/testpick.htm](http://www.ers.usda.gov/Data/CostsAndReturns/testpick.htm).
- USDA-NASS. 2001. *Agricultural Chemical Usage, 2001 field Crops Summary*. Washington, DC.: USDA National Agricultural Statistics Service.
- USDA-NASS. 2001. *Field Crops 2001 Crop Production*. Washington, DC.: USDA National Agricultural Statistics Service.
- Wang, M., C. Saricks, and D. Santini. 1999. *Effects of Fuel Ethanol Use on Fuel-Cycle Energy and Greenhouse Gas Emissions*. Argonne, IL.: USDOE Argonne National laboratory, Center for Transportation Research.

Reference 2

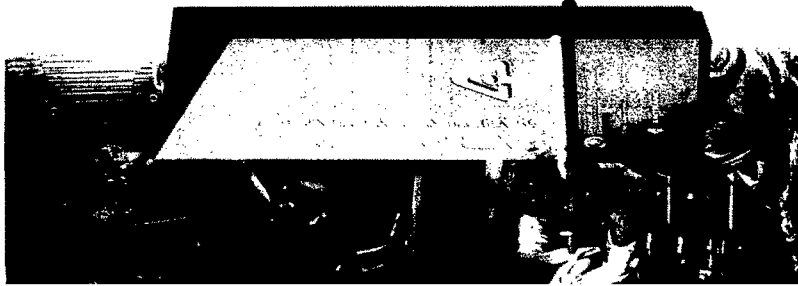

# *The Debate on Energy and Greenhouse Gas Emissions Impacts of Fuel Ethanol*

*Michael Wang  
Center for Transportation Research  
Energy Systems Division  
Argonne National Laboratory*

*Energy Systems Division Seminar  
Argonne National Laboratory  
August 3, 2005*




THE UNIVERSITY OF  
CHICAGO

*Argonne National Laboratory is managed  
by The University of Chicago  
for the U.S. Department of Energy*



### U.S. Fuel Ethanol Production Has Experienced Large Increases, and The Trend Will Continue

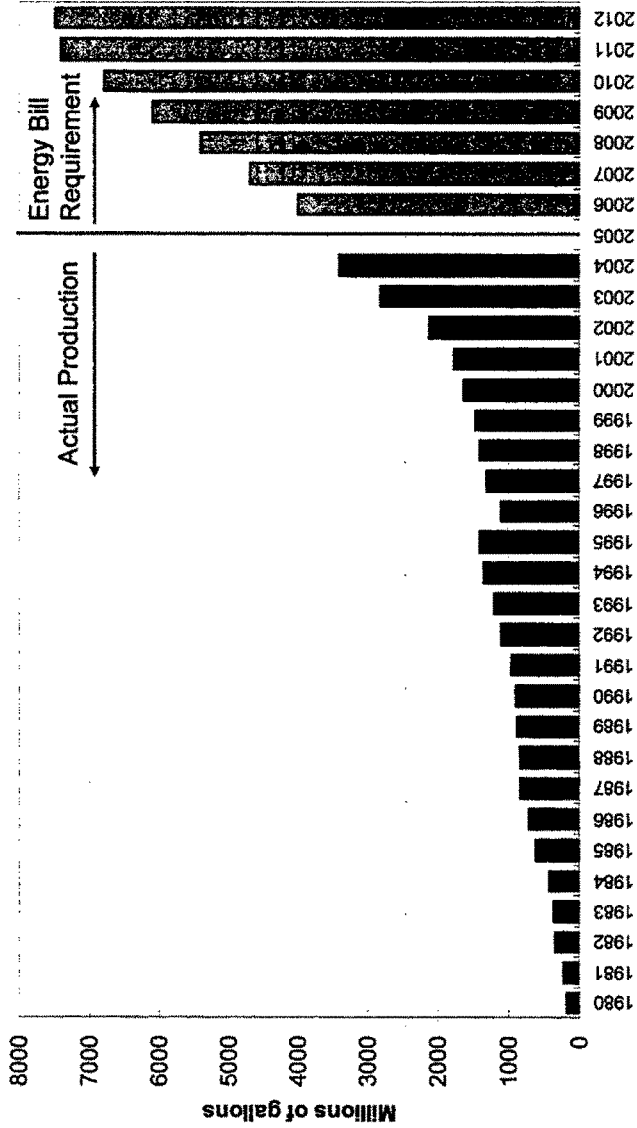

Source: Renewable Fuels Association





## Almost All U.S. Ethanol Plants Are Located in U.S. Midwest






# Brazil and The U.S. Lead Fuel Ethanol Use

2004 World Ethanol Production  
(All grades, million gallons, from F.O. Licht)

Brazil	3,989	Italy	40
U.S.	3,535	Australia	33
China	994	Japan	31
India	462	Pakistan	26
France	219	Sweden	26
Russia	198	Philippines	22
South Africa	110	South Korea	22
U.K.	106	Guatemala	17
Saudi Arabia	79	Cuba	16
Spain	78	Ecuador	12
Thailand	74	Mexico	9
Germany	71	Nicaragua	8
Ukraine	66	Mauritius	6
Canada	61	Zimbabwe	6
Poland	53	Kenya	3
Indonesia	44	Switzerland	3
Argentina	42	Others	338

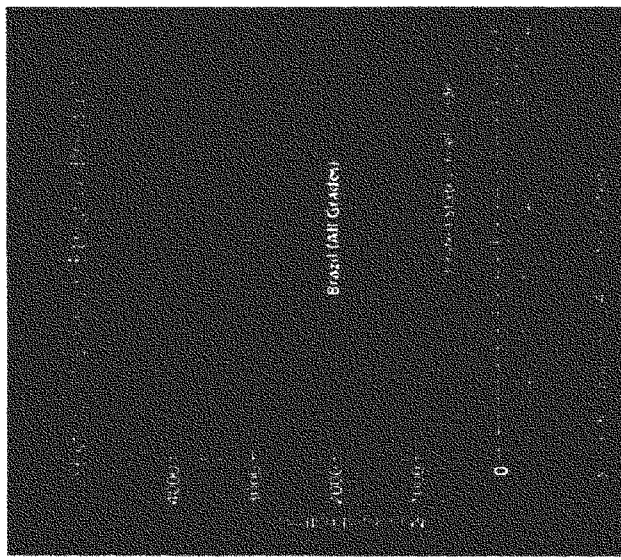




## **A Recent Study by Pimentel&Patzek Conclude Increases in Fossil Energy Use by Biofuels**

- Pimentel&Patzek conclude that
  - Corn ethanol increases fossil energy use by 29%
  - Cellulosic biomass-based ethanol by 50-57%
  - Biodiesel by 27-118%
- Other studies have very different conclusions
  - Argonne has shown
    - Corn ethanol reduces fossil energy use by 26%
    - Cellulosic biomass-based ethanol reduces by 90%
  - National Renewable Energy Laboratory has shown that biodiesel reduces fossil energy use by 69%
- Differences between Pimentel&Patzek and others lie in
  - Corn farming energy use
  - Energy use for producing nitrogen fertilizer
  - Ethanol plant energy use
  - Credits for co-products from biofuel plants




# Comparative Results Between Ethanol and Gasoline Are More Relevant to Policy Debate

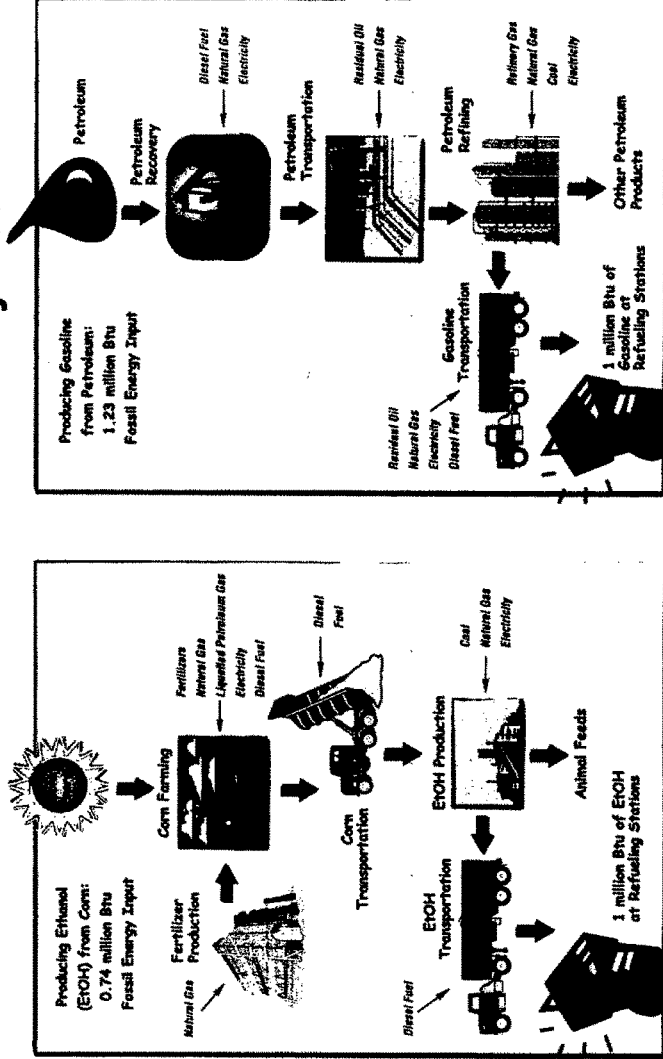






# Energy in Different Fuels Can Have Very Different Qualities

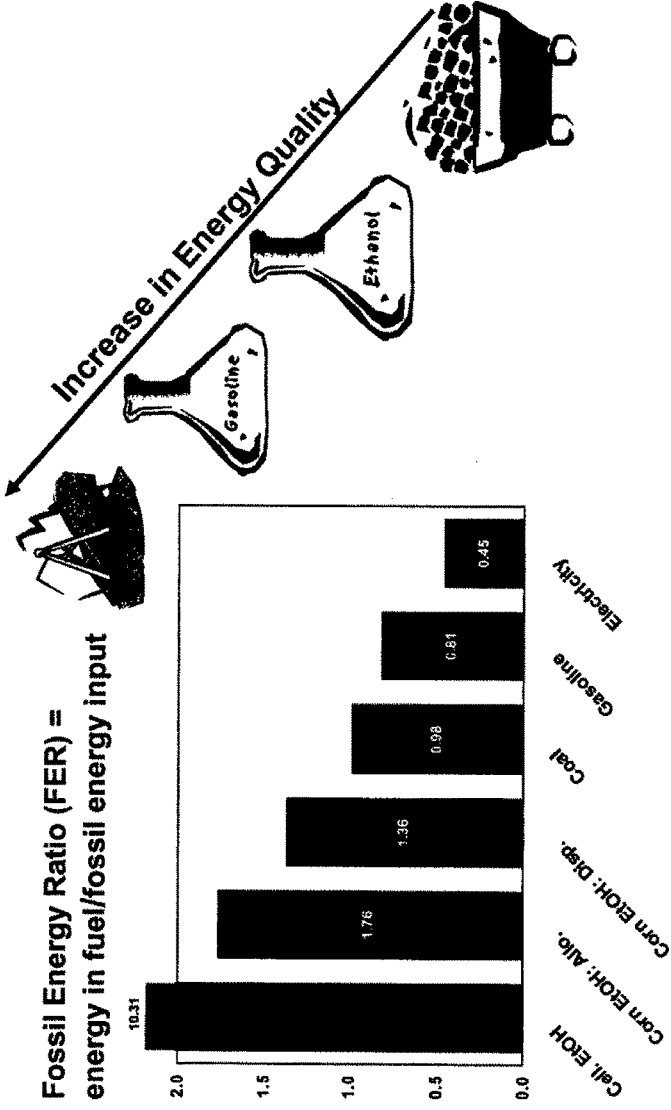




# Recycling of Carbon by Ethanol Results in CO<sub>2</sub> Benefits for It

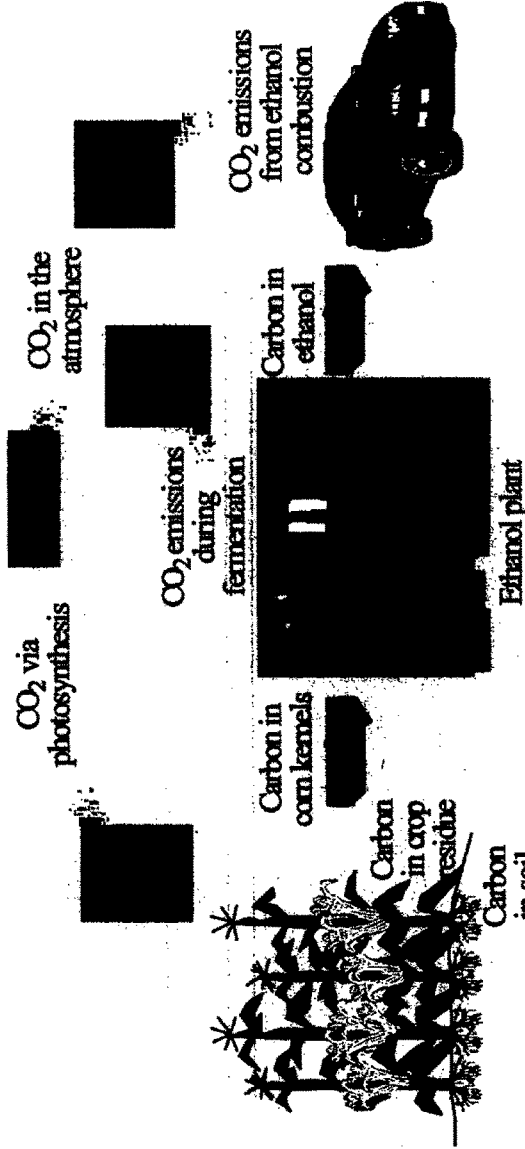

Carbon capture in ethanol plants for beverage use is not considered in ANL analysis. Additional GHG benefits could be achieved by considering carbon capture.



## ***U.S. Corn Yield Per Acre Has Increased by Nearly 8 Times in The Past 100 years***

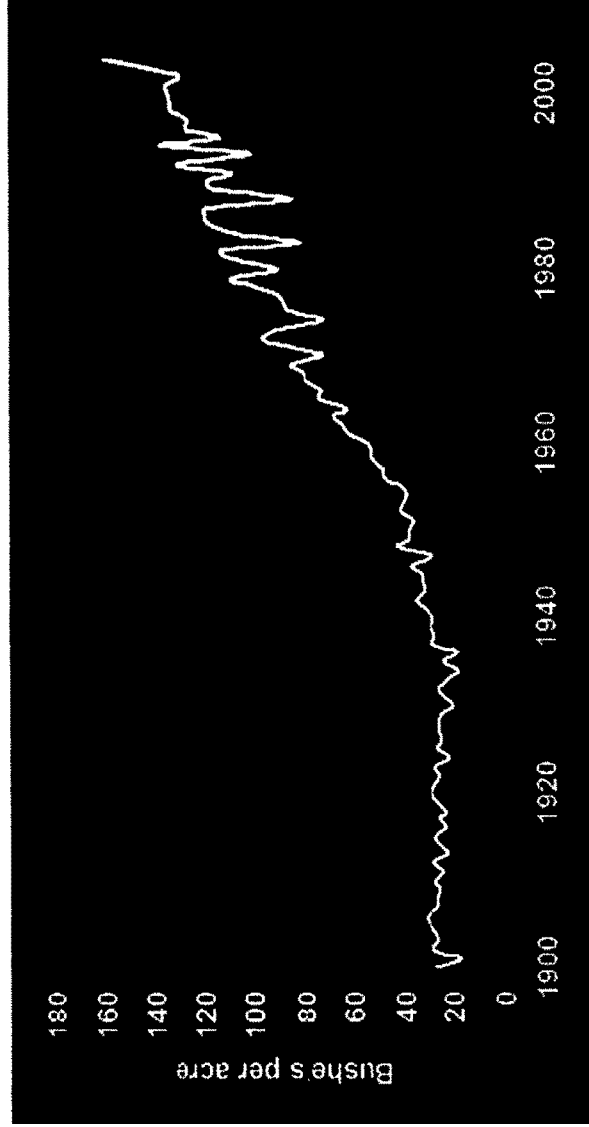


Source: Oak Ridge National Laboratory (2005)






## U.S. Corn Output Per Pound of Fertilizer Has Risen by 70% in The Past 35 Years

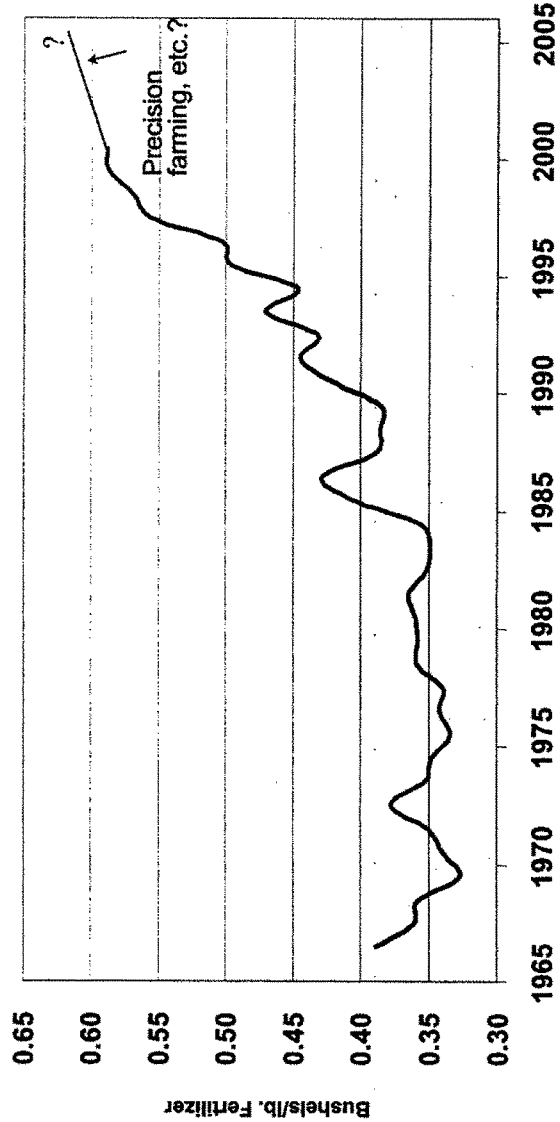

Based on historical USDA data; results are 3-year moving averages



## Technology and Desire for Reducing Operation Costs Have Resulted in Reduced Energy Use in Corn Ethanol Plants

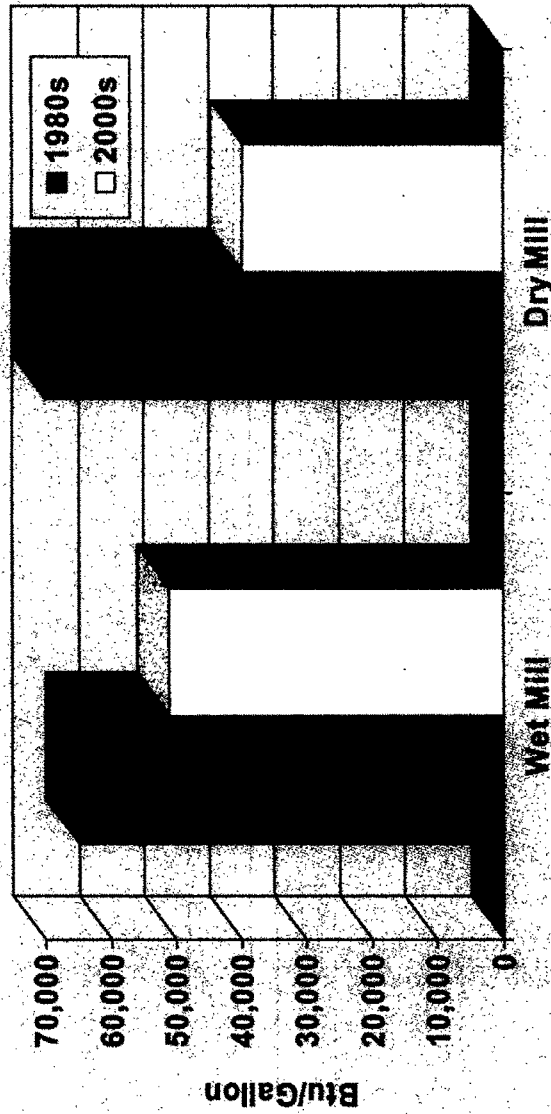


Source: from Argonne's discussions with ethanol plant designers, recent USDA data, and other reported data.



# One-Third of Corn Kernel Mass Ends in Distillers Dry Grains and Solubles (DDGS) in Ethanol Plants

2003 North American DDGS Consumption

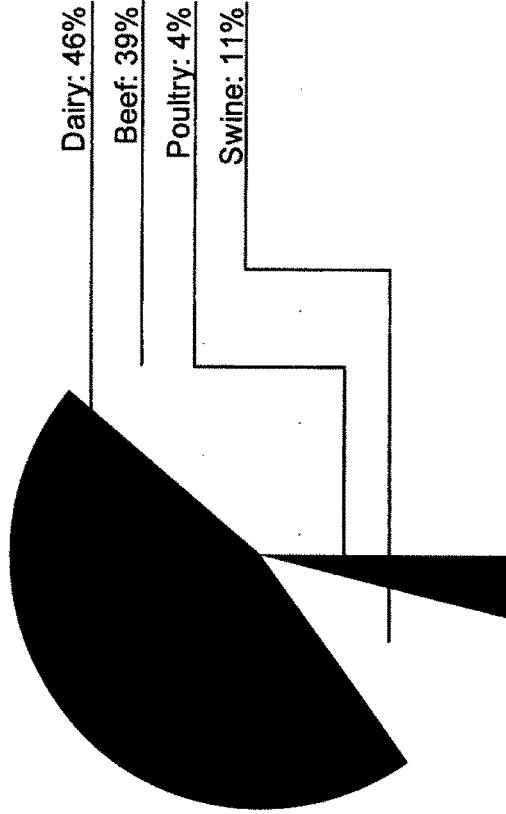

Source: Commodity Specialist Co. (in RFA, 2005)




## ***Allocation Method for Animal Feed Is a Critical Factor in Determining Ethanol's Energy and Emission Results***


<b>Allocation Method</b>	<b>Wet milling</b>	<b>Dry milling</b>
<b>Weight</b>	52%	51%
<b>Energy content</b>	43%	39%
<b>Process energy</b>	36%	41%
<b>Market value</b>	30%	24%
<b>Displacement</b>	~16%	~20%

- Weight and energy methods no longer used
- Process energy allocation values are from USDA 2004
- Some studies did not consider co-products at all


**Cellulosic Ethanol Plant Designs Under Consideration  
Use the Unfermentable Portion of Biomass to Generate  
Steam and Electricity**

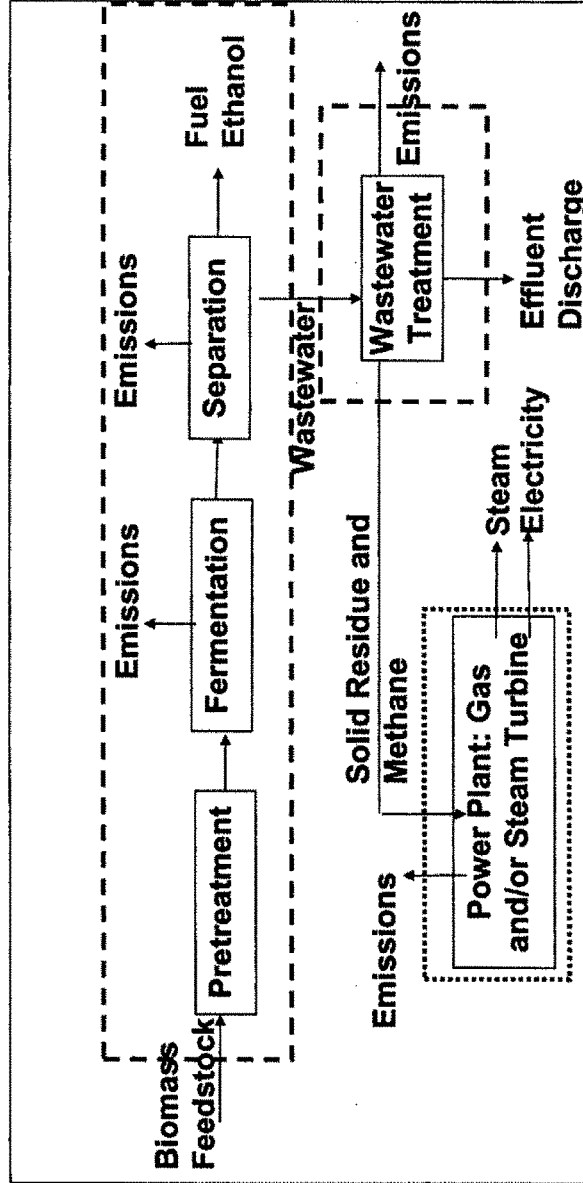

## Energy Benefits of Fuel Ethanol Lie in Reductions in Fossil Energy and Petroleum Use

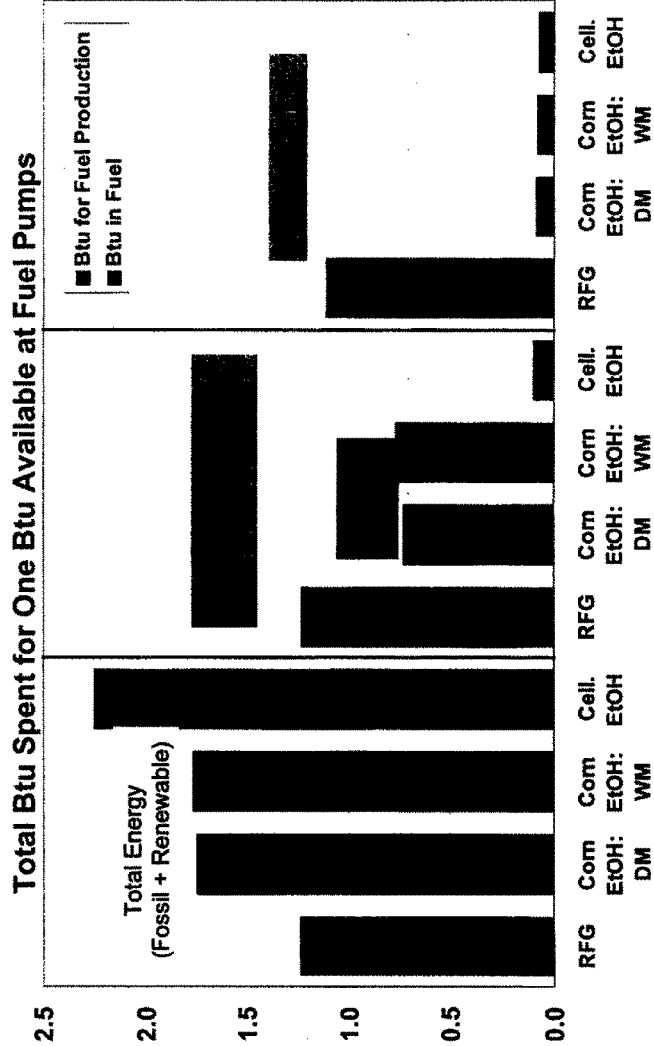


## Use of Ethanol to Replace Gasoline Results in WTW Fossil Energy and Petroleum Benefits

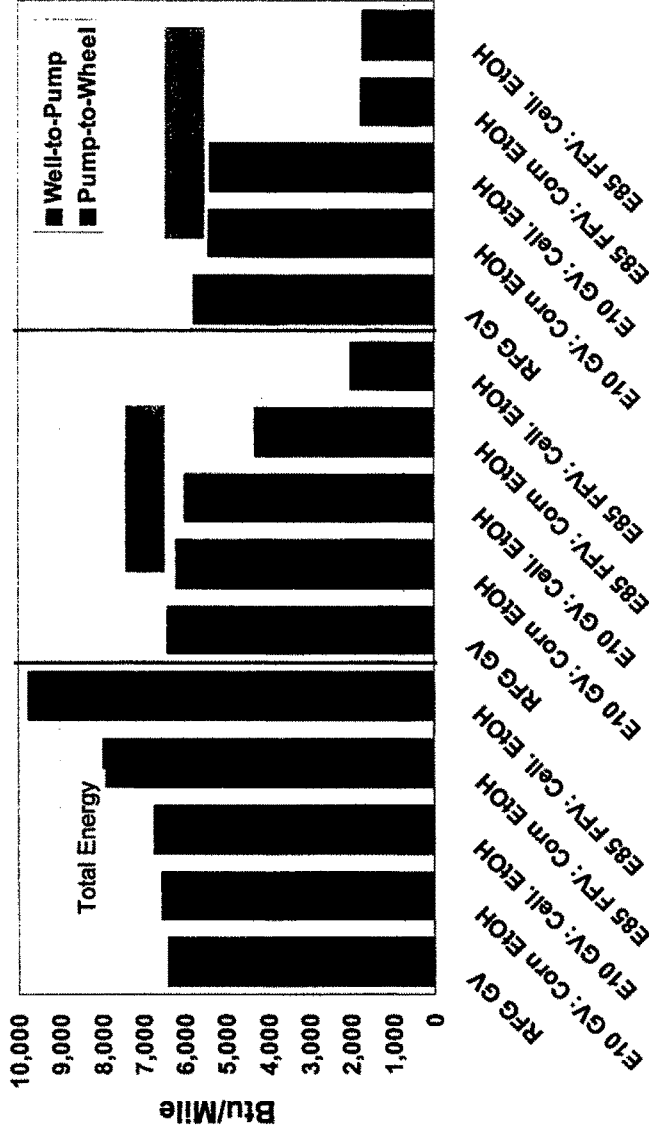




# Per-Mile GHG Emission Results Show Larger Benefits of E85 Blend and Cellulosic Ethanol

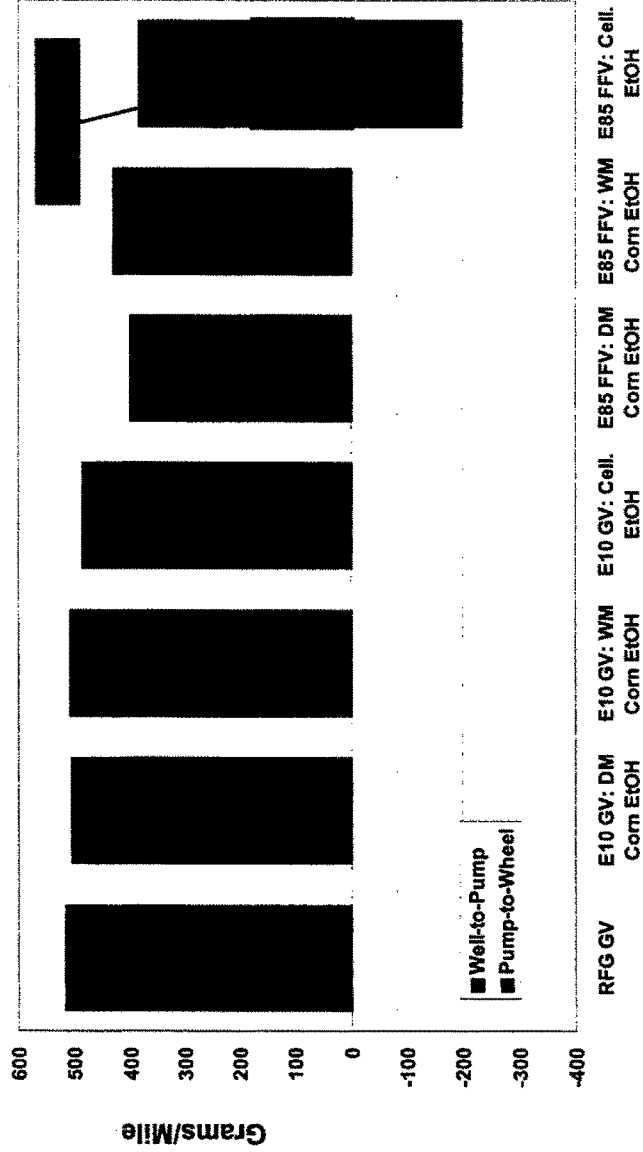






# Per Gallon of EtOH Used, E85 Achieves Incremental Benefits in GHG Reduction Over E10

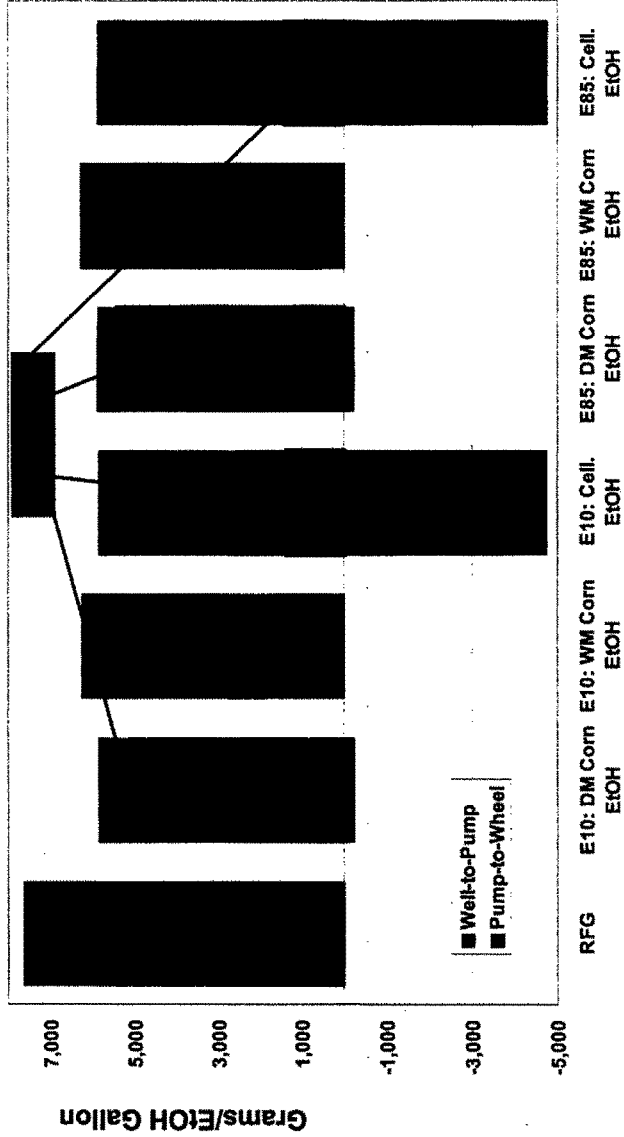



### Per Mile Driven with EtOH Blends, E85 (Especially with Cellulosic EtOH) Reduces Far Greater GHG Emissions

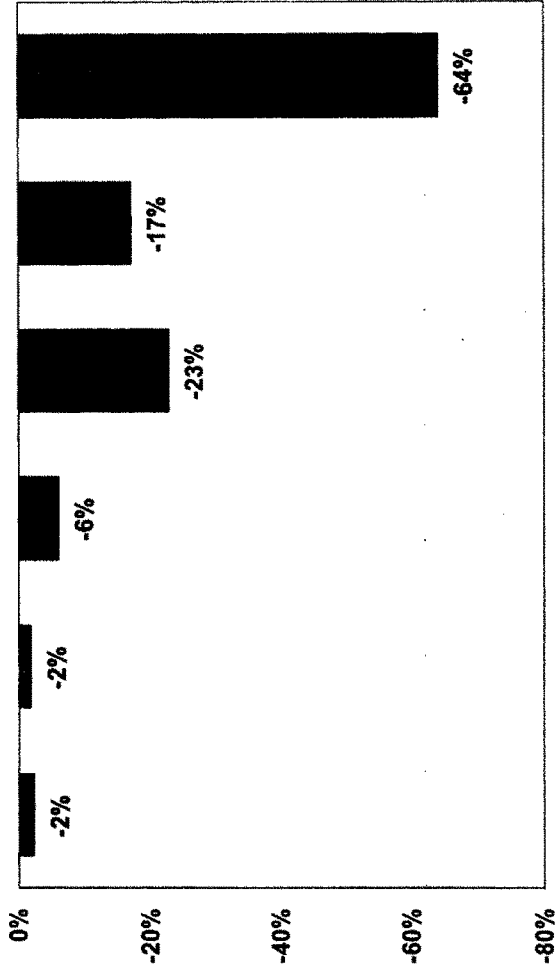


E10 GV: DM E10 GV: WM E10 GV: Cell. E85 FFV: DM E85 FFV: WM E85 FFV: Cell. EtOH

Per-Mile GHG Emission Reductions by Ethanol Blends to Displace Gasoline



### Per Gallon of EtOH Used, Corn EtOH Yields 18-29% Reduction in GHGs and Cellulosic EtOH Yields 85-86% Reduction


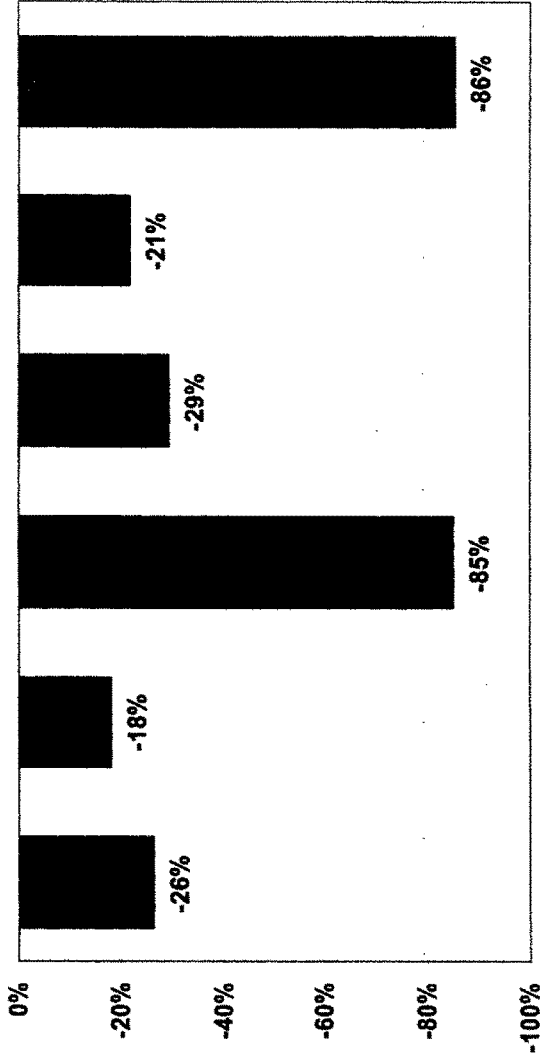


E10 GV: DM E10 GV: WM E10 GV: Cell. E85 FFV: DM E85 FFV: WM E85 FFV: Cell.  
Corn EtOH Corn EtOH EtOH Corn EtOH Corn EtOH EtOH

GHG Emission Reductions Per Gallon of Ethanol to Displace An Energy-Equivalent Amount of Gasoline





# GREET Is Designed to Conduct Stochastic Simulations to Address Uncertainties for Key Parameters

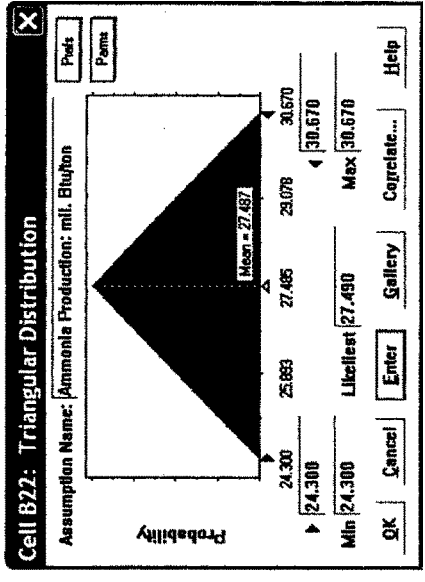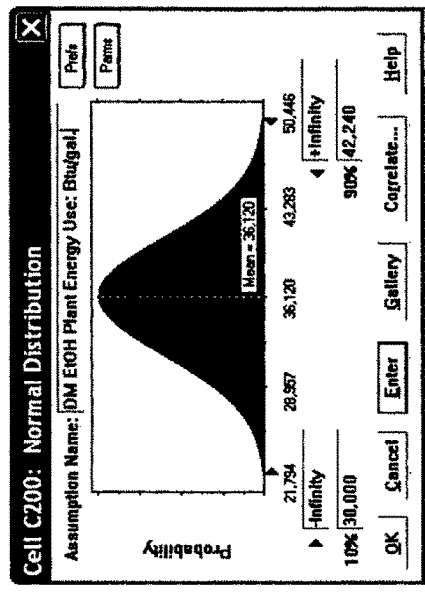




# With Stochastic Simulations, GREET Generates Results Showing The Range of Outcomes

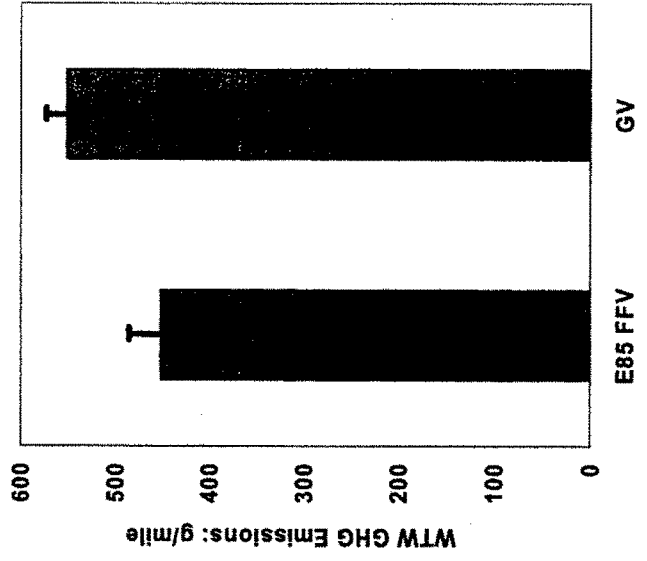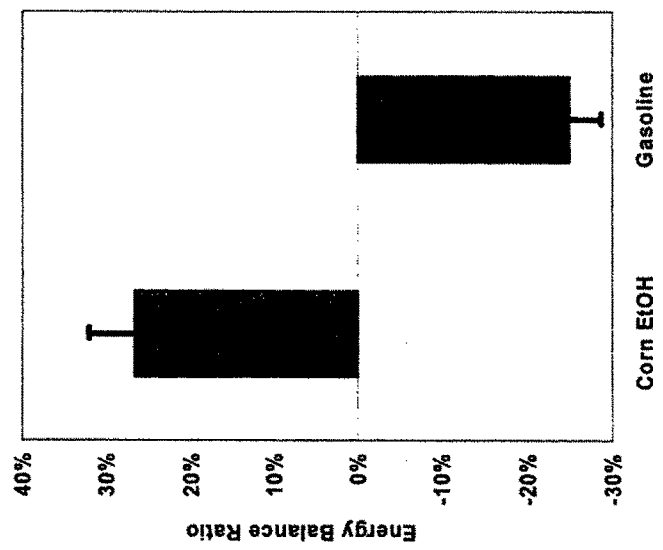


## Corn EtOH Energy Balance Results Among Completed Studies Show an Uptrend

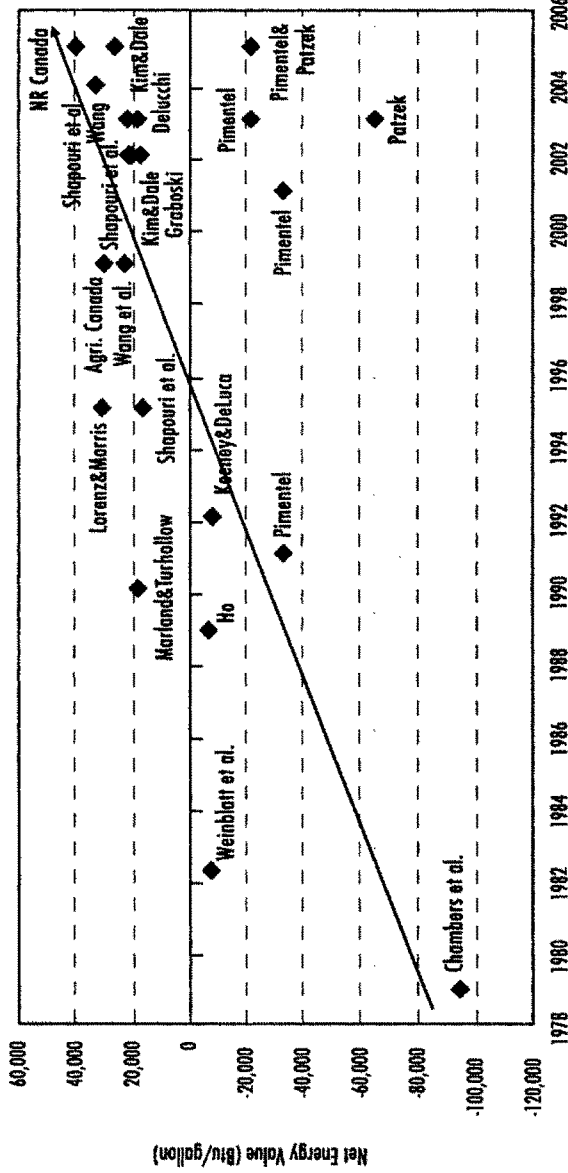

Energy balance here is defined as Btu content of ethanol minus fossil energy used to produce a gallon of ethanol

## Energy Balance Results of Ethanol Depend Heavily on System Boundary Choices

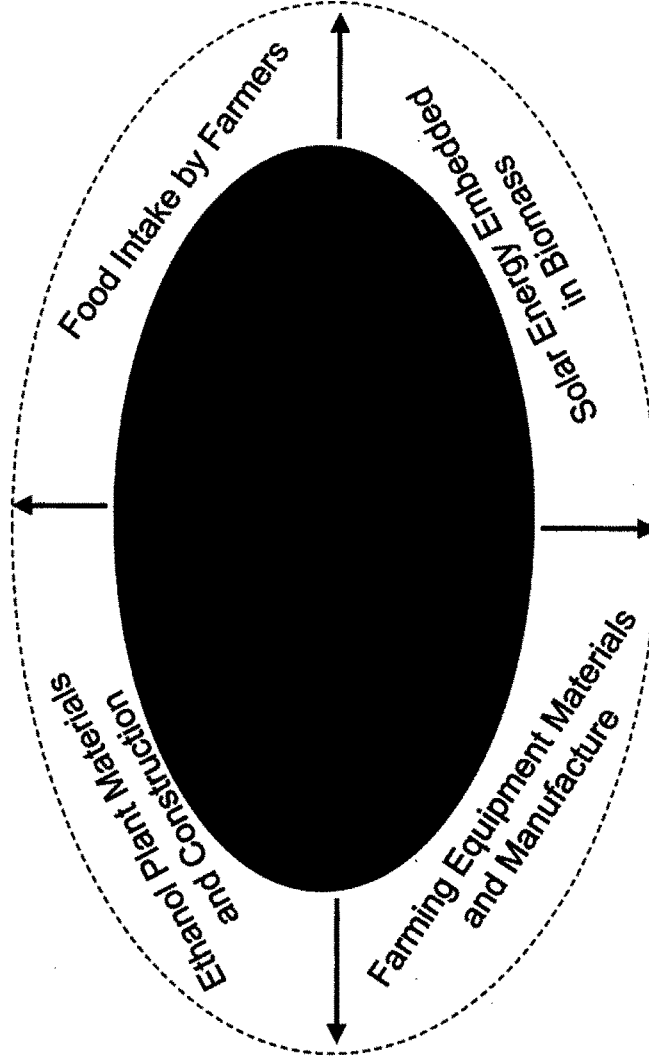


## ***Debate on Energy Balance Itself May Have Little Practical Meaning***

- ❑ Though self evaluation of a fuel's energy balance is easy to understand, to do so for a fuel in isolation could be arbitrary
- ❑ All Btus are not created equal. The energy sector has been converting low-value Btus into high-value Btus, with energy losses
- ❑ Society has not made energy choice decisions on the basis of energy balance values of individual energy products
- ❑ Issues of concern, such as petroleum consumption and GHG emissions, should be analyzed directly for fuels
- ❑ A complete, robust way of evaluating a fuel's effects is to compare the fuel (e.g., ethanol) with those to be displaced (e.g., gasoline)






# Most Completed Studies on GHG Emissions Show GHG Emission Reduction by Corn EtOH vs. Gasoline

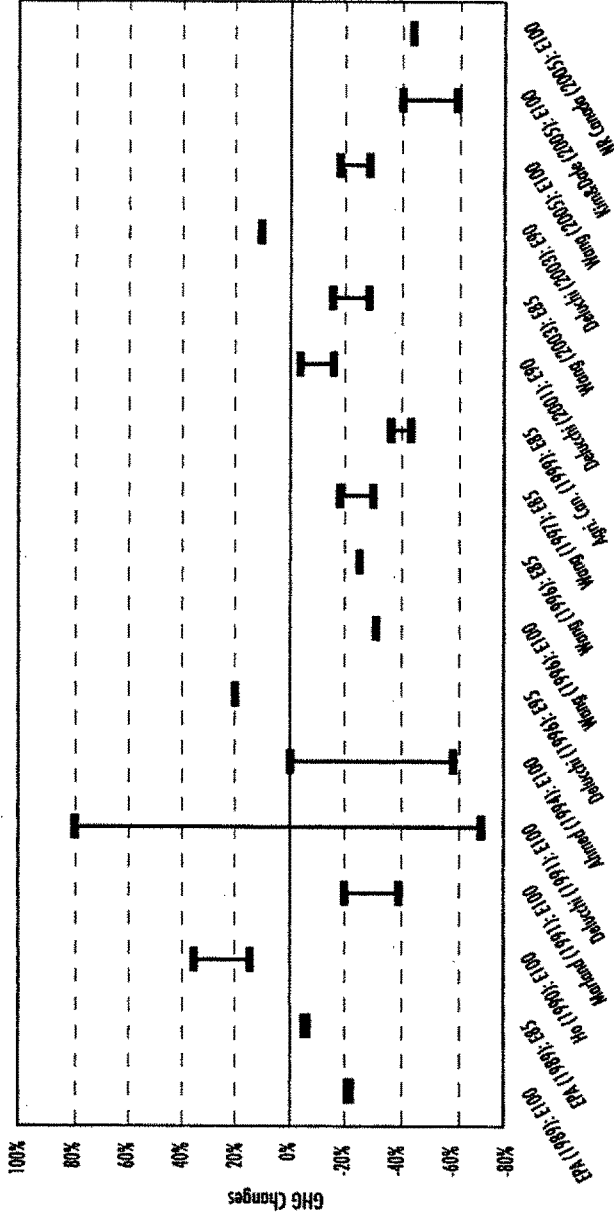



## Of the 11.8 Billion Bushels of Corn Produced in U.S. in 2004, About 12% Was Used for Ethanol Production

U.S. Corn Usage by Segment 2004


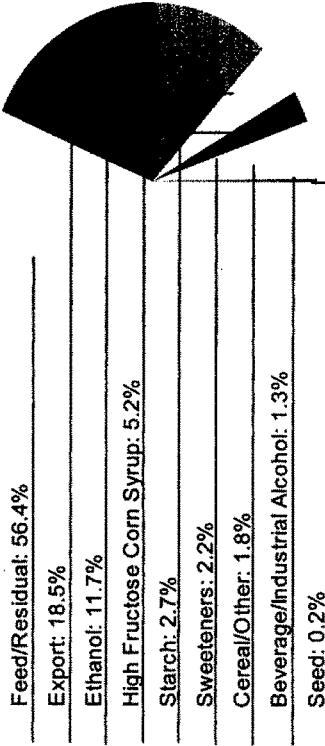


- ❑ The U.S. produced 3.41 billion gallons of fuel ethanol in 2004, equivalent to 2.28 billion gallons of gasoline
- ❑ In 2003, the U.S. consumed 134 billion gallons of gasoline and 39 billion gallons of on-road diesel fuels

Source: ERS/USDA, 2004, Feed Outlook (in RFA, 2005); EIA



# A Recent Study by Oak Ridge National Laboratory Concludes 1.3 Billion Tons of Biomass Available in U.S. Per Year

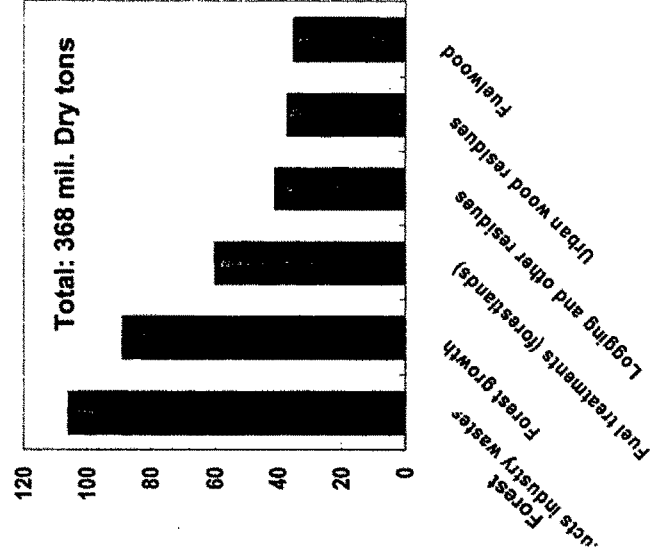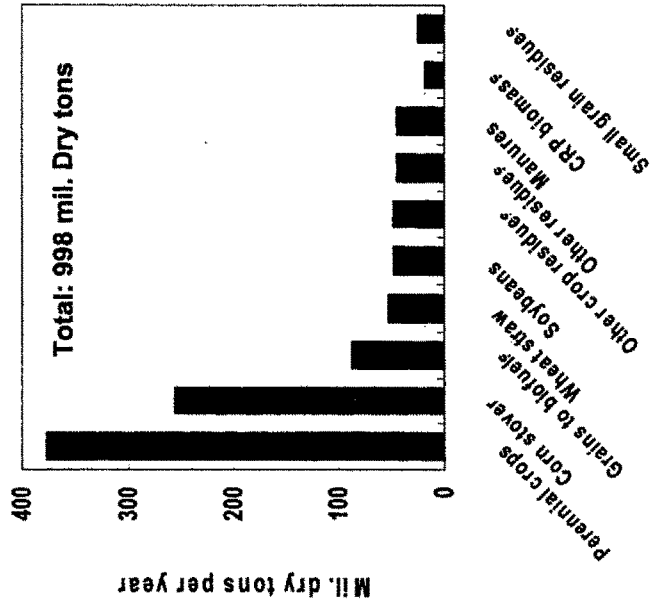




## ***The Energy Bill Encourages Production of Cellulosic Ethanol***

- Creates a credit-trading program where 1 gallon of cellulosic ethanol is equal to 2.5 gallons of renewable fuel
- Creates a program for production of 250 million gallons of cellulosic ethanol in 2013
- Creates a Loan Guarantee Program of \$250 million per facility
- Creates a \$650 million Grant Program for cellulosic ethanol
- Creates an Advanced Biofuels Technologies Program of \$550 million



### **A Recent Study by NRDC Concludes That Efficiency and Renewable Fuels Together Could Eliminate U.S. Gasoline Need**

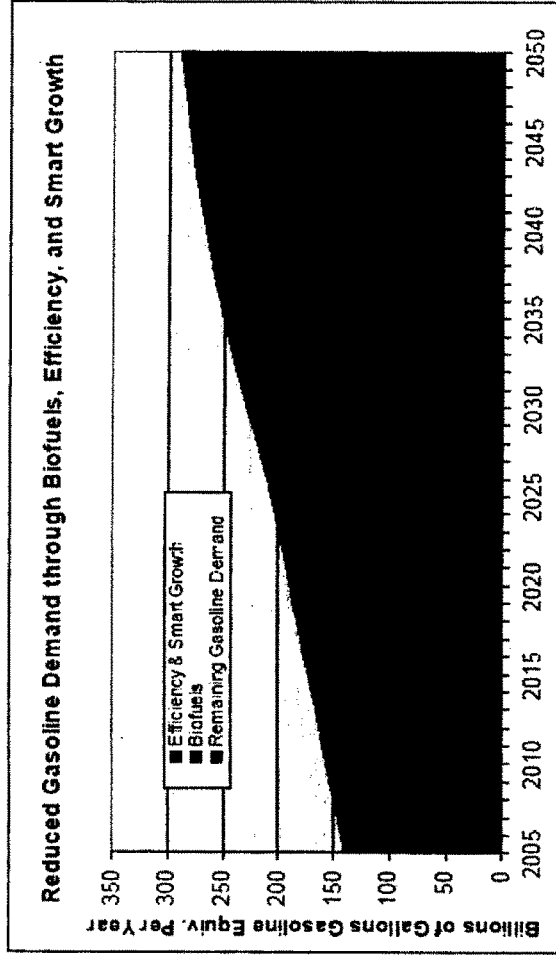

Source: Natural Resources Defense Council, 2005



**Argonne Analyzed Bio-Fuels, Power, and Chemicals  
Production from Cellulosic Biomass for a  
Comprehensive Study of Bio-Fuels**

Production Scenarios	Transportation Fuel	Power	Others
EtOH/GTCC	Ethanol	√	
EtOH/Rankine	Ethanol	√	
Multi-fuel	Ethanol, FTDiesel	√	FTgasoline, FTnaphtha
EtOH/Protein/Rankine	Ethanol	√	Protein
FTD/GTCC	FTDiesel	√	FTgasoline, FTnaphtha
DME/GTCC	DMEther	√	


**Shares of Biofuels and Co-Products (Based on Energy Content) Vary for the Scenarios Evaluated**

Production Scenarios	Transportation Fuel	Power	Others
EtOH / GTCC	79.6%	20.4%	
EtOH / Rankine	88.2%	11.9%	
Multi-fuel	89.9%	1.8%	8.3%
EtOH / Protein / Rankine	83.2%	3.5%	13.3%
DME / GTCC	44.7%	55.3%	
FTD / GTCC	36.8%	40.4%	22.9%

- Bio-EtOH has the largest amount of energy share in fuel products.
- Thermochemical process generates similar amount of energy between fuel and power.



# Energy Benefits of Biofuels Vary Among Different Production Scenarios

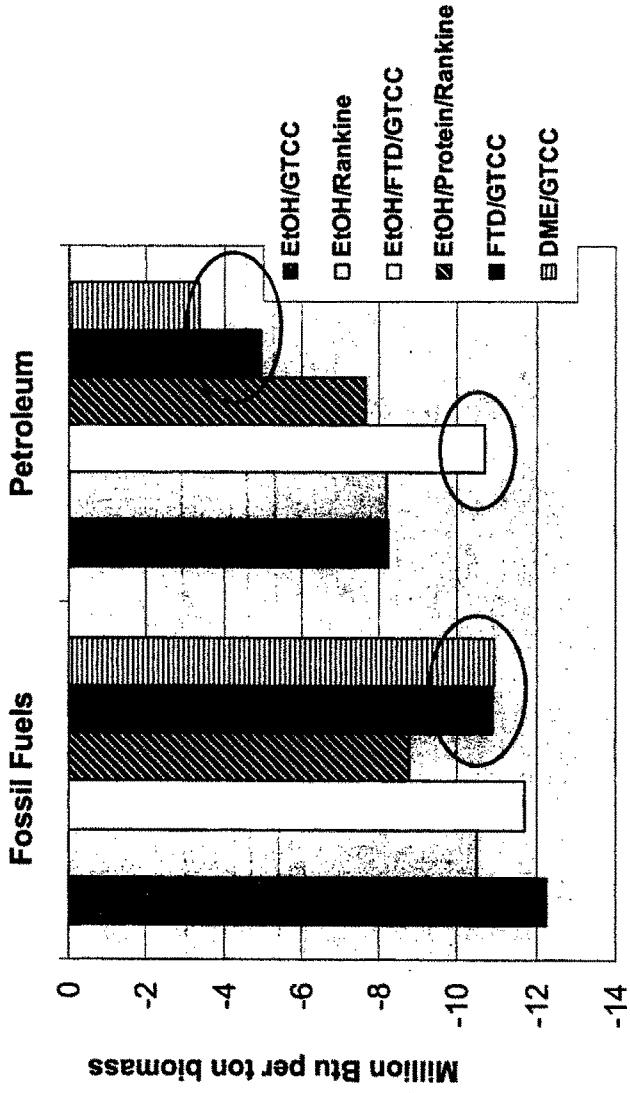



## **Conclusions**

- Energy balance value for a given energy product alone is not meaningful in evaluating its benefit
- Any type of fuel ethanol helps substantially reduce transportation's fossil energy and petroleum use, relative to petroleum gasoline
- Corn-based fuel ethanol achieves moderate reductions in GHG emissions
- Cellulosic ethanol can achieve much greater energy and GHG benefits

*(For more information, please visit the GREET model website at <http://greet.anl.gov>)*

## Reference 3

*Natural Resources Research, Vol. 14, No. 1, March 2005 (© 2005)*  
DOI: 10.1007/s11053-005-4679-8

## Ethanol Production Using Corn, Switchgrass, and Wood; Biodiesel Production Using Soybean and Sunflower

David Pimentel<sup>1,3</sup> and Tad W. Patzek<sup>2</sup>

*Received and accepted 30 January 2005*

Energy outputs from ethanol produced using corn, switchgrass, and wood biomass were each less than the respective fossil energy inputs. The same was true for producing biodiesel using soybeans and sunflower, however, the energy cost for producing soybean biodiesel was only slightly negative compared with ethanol production. Findings in terms of energy outputs compared with the energy inputs were: • Ethanol production using corn grain required 29% more fossil energy than the ethanol fuel produced. • Ethanol production using switchgrass required 50% more fossil energy than the ethanol fuel produced. • Ethanol production using wood biomass required 57% more fossil energy than the ethanol fuel produced. • Biodiesel production using soybean required 27% more fossil energy than the biodiesel fuel produced (Note, the energy yield from soy oil per hectare is far lower than the ethanol yield from corn). • Biodiesel production using sunflower required 118% more fossil energy than the biodiesel fuel produced.

**KEY WORDS:** Energy, biomass, fuel, natural resources, ethanol, biodiesel.

### INTRODUCTION

The United States desperately needs a liquid fuel replacement for oil in the future. The use of oil is projected to peak about 2007 and the supply is then projected to be extremely limited in 40–50 years (Duncan and Youngquist, 1999; Youngquist and Duncan, 2003; Pimentel and others, 2004a). Alternative liquid fuels from various sources have been sought for many years. Two panel studies by the U.S. Department of Energy (USDOE) concerned with ethanol production using corn and liquid fuels from biomass energy report a negative energy return (ERAB, 1980, 1981). These reports were reviewed by 26 expert U.S. scientists independent of the USDOE; the findings indicated that the conversion of corn into ethanol energy was negative and these findings were

unanimously approved. Numerous other investigations have confirmed these findings over the past two decades.

A review of the reports that indicate that corn ethanol production provides a positive return indicates that many inputs were omitted (Pimentel, 2003). It is disappointing that many of the inputs were omitted because this misleads U.S. policy makers and the public.

Ethanol production using corn, switchgrass, and wood, and biodiesel production using soybeans and sunflower, will be investigated in this article.

### CORN ETHANOL PRODUCTION USING CORN

Shapouri (Shapouri, Duffield, and Wang, 2002; Shapouri and others, 2004) of the USDA claims that ethanol production provides a net energy return. In addition, some large corporations, including Archer, Daniels, Midland (McCain, 2003), support the production of ethanol using corn and are making huge profits from ethanol production, which is subsidized

<sup>1</sup> College of Agriculture and Life Sciences, Cornell University, Ithaca, New York 14853.

<sup>2</sup> Department of Civil and Environmental Engineering, University of California, Berkeley California 94720.

<sup>3</sup> To whom correspondence should be addressed; e-mail: dp18@cornell.edu.

by federal and state governments. Some politicians also support the production of corn ethanol based on their mistaken belief that ethanol production provides large benefits for farmers, whereas in fact farmer profits are minimal. In contrast to the USDA, numerous scientific studies have concluded that ethanol production does not provide a net energy balance, that ethanol is not a renewable energy source, is not an economical fuel, and its production and use contribute to air, water, and soil pollution and global warming (Ho, 1989; Citizens for Tax Justice, 1997; Giampietro, Ulgiati, and Pimentel, 1997; Youngquist, 1997; Pimentel, 1998, 2001, 2003 NPRA, 2002; Croysdale, 2001; CalGasoline, 2002; Lieberman, 2002; Hodge, 2002, 2003; Ferguson, 2003, 2004; Patzek, 2004). Growing large amounts of corn necessary for ethanol production occupies cropland suitable for food production and raises serious ethical issues (Pimentel, 1991, 2003; Pimentel and Pimentel, 1996).

Shapouri (Shapouri, Duffield, and Wang, 2002; Shapouri and others, 2004) studies concerning the benefits of ethanol production are incomplete because they omit some of the energy inputs in the ethanol production system. The objective of this analysis is to update and assess all the recognized inputs that operate in the entire ethanol production system. These inputs include the direct costs in terms of energy and dollars for producing the corn feedstock as well as for the fermentation/distillation process. Additional costs to the consumer include federal and state subsidies, plus costs associated with environmental pollution and degradation that occur during the entire production system. Ethanol production in the United States does not benefit the nation's energy security, its agriculture, the economy, or the environment. Also, ethical questions are raised by diverting land and precious food into fuel and actually adding a net amount of pollution to the environment.

#### Energy Balance

The conversion of corn and other food/feed crops into ethanol by fermentation is a well-known and established technology. The ethanol yield from a large production plant is about 1 l of ethanol from 2.69 kg of corn grain (Pimentel, 2001).

The production of corn in the United States requires a significant energy and dollar investment (Table 1). For example, to produce average corn yield of 8,655 kg/ha of corn using average production technology requires the expenditure of about 8.1 million kcal for the large number of inputs listed in

Table 1 (about 271 gallons of gasoline equivalents/ha). The production costs are about \$917/ha for the 8,655 kg or approximately 11¢/kg of corn produced. To produce a liter of ethanol requires 29% more fossil energy than is produced as ethanol and costs 42¢ per l (\$1.59 per gallon) (Table 2). The corn feedstock alone requires nearly 50% of the energy input.

Full irrigation (when there is little or no rainfall) requires about 100 cm of water per growing season. Only approximately 15% of U.S. corn production currently is irrigated (USDA, 1997a). Of course not all of this requires full irrigation, so a mean value is used. The mean irrigation for all land growing corn grain is 8.1 cm per ha during the growing season. As a mean

**Table 1.** Energy Inputs and Costs of Corn Production Per Hectare in the United States

Inputs	Quantity	kcal × 1000	Costs \$
Labor	11.4 hrs <sup>a</sup>	462 <sup>b</sup>	148.20 <sup>c</sup>
Machinery	55 kg <sup>d</sup>	1,018 <sup>e</sup>	103.21 <sup>f</sup>
Diesel	88 L <sup>g</sup>	1,003 <sup>h</sup>	34.76
Gasoline	40 L <sup>i</sup>	405 <sup>j</sup>	20.80
Nitrogen	153 kg <sup>k</sup>	2,448 <sup>l</sup>	94.86 <sup>m</sup>
Phosphorus	65 kg <sup>n</sup>	270 <sup>o</sup>	40.30 <sup>p</sup>
Potassium	77 kg <sup>q</sup>	251 <sup>r</sup>	23.87 <sup>s</sup>
Lime	1,120 kg <sup>t</sup>	315 <sup>u</sup>	11.00
Seeds	21 kg <sup>v</sup>	520 <sup>w</sup>	74.81 <sup>x</sup>
Irrigation	8.1 cm <sup>y</sup>	320 <sup>z</sup>	123.00 <sup>aa</sup>
Herbicides	6.2 kg <sup>ab</sup>	620 <sup>ac</sup>	124.00
Insecticides	2.8 kg <sup>ac</sup>	280 <sup>ac</sup>	56.00
Electricity	13.2 kWh <sup>ad</sup>	34 <sup>af</sup>	0.92
Transport	204 kg <sup>ag</sup>	169 <sup>ah</sup>	61.20
Total		8,115	\$916.93
Corn yield 8,655 kg/ha <sup>ai</sup>		31,158	kcal input: output 1:3.84

<sup>a</sup>NASS, 1999; <sup>b</sup>It is assumed that a person works 2,000 hr per yr and utilizes an average of 8,000 l of oil equivalents per yr; <sup>c</sup>It is assumed that labor is paid \$13 an hr; <sup>d</sup>Pimentel and Pimentel, 1996; <sup>e</sup>Prorated per ha and 10 yr life of the machinery. Tractors weigh from 6 to 7 tons and harvesters 8 to 10 tons, plus plows, sprayers, and other equipment; <sup>f</sup>Hoffman, Warnock, and Himman, 1994; <sup>g</sup>Wilcke and Chaplin, 2000; <sup>h</sup>Input 11,400 kcal per l; <sup>i</sup>Estimated; <sup>j</sup>Input 10,125 kcal per l; <sup>k</sup>USDA, 2002; <sup>l</sup>Patzek, 2004; <sup>m</sup>Cost \$62 per kg; <sup>n</sup>USDA, 2002; <sup>o</sup>Input 4,154 kcal per kg; <sup>p</sup>Cost \$62 per kg; <sup>q</sup>USDA, 2002; <sup>r</sup>Input 3,260 kcal per kg; <sup>s</sup>Cost 31¢ per kg; <sup>t</sup>Breaz, 2004; <sup>u</sup>Input 281 kcal per kg; <sup>v</sup>Pimentel and Pimentel, 1996; <sup>w</sup>Pimentel, 1980; <sup>x</sup>USDA, 1997b; <sup>y</sup>USDA, 1997a; <sup>z</sup>Batty and Keller, 1980; <sup>aa</sup>Irrigation for 100 cm of water per ha costs \$1,000 (Larsen, Thompson, and Harn, 2002); <sup>ab</sup>Larsen and Cardwell, 1999; <sup>ac</sup>USDA, 2002; <sup>ad</sup>USDA, 1991; <sup>ae</sup>Input 100,000 kcal per kg of herbicide and insecticide; <sup>af</sup>Input 860 kcal per kWh and requires 3 kWh thermal energy to produce 1 kWh electricity; <sup>ag</sup>Goods transported include machinery, fuels, and seeds that were shipped an estimated 1,000 km; <sup>ah</sup>Input 0.83 kcal per kg per km transported; <sup>ai</sup>USDA, 2003a.

## Ethanol Production; Biodiesel Production

Table 2. Inputs Per 1000 l of 99.5% Ethanol Produced From Corn<sup>a</sup>

Inputs	Quantity	kcal × 1000	Dollars \$
Corn grain	2,690 kg <sup>b</sup>	2,522 <sup>b</sup>	284.25 <sup>b</sup>
Corn transport	2,690 kg <sup>b</sup>	322 <sup>c</sup>	21.40 <sup>d</sup>
Water	40,000 L <sup>e</sup>	90 <sup>f</sup>	21.16 <sup>g</sup>
Stainless steel	3 kg <sup>h</sup>	12 <sup>i</sup>	10.60 <sup>d</sup>
Steel	4 kg <sup>h</sup>	12 <sup>i</sup>	10.60 <sup>d</sup>
Cement	8 kg <sup>h</sup>	8 <sup>i</sup>	10.60 <sup>d</sup>
Steam	2,546,000 kcal <sup>j</sup>	2,546 <sup>j</sup>	21.16 <sup>g</sup>
Electricity	392 kWh <sup>k</sup>	1,011 <sup>l</sup>	27.44 <sup>l</sup>
95% ethanol to 99.5%	9 kcal/L <sup>m</sup>	9 <sup>n</sup>	40.00
Sewage effluent	20 kg BOD <sup>o</sup>	69 <sup>h</sup>	6.0
Total		6,597	\$453.21

<sup>a</sup>Output: 1 l of ethanol = 5,130 kcal; <sup>b</sup>Data from Table 1; <sup>c</sup>Calculated for 144 km roundtrip; <sup>d</sup>Pimentel, 2003; <sup>e</sup>15 l of water mixed with each kg of grain; <sup>f</sup>Pimentel and others, 1997; <sup>g</sup>Pimentel and others, 2004b; <sup>h</sup>4 kWh of energy required to process 1 kg of BOD (Blais and others, 1995); <sup>i</sup>Slesser and Lewis, 1979; <sup>j</sup>Illinois Corn, 2004; <sup>k</sup>Calculated based on coal fuel; <sup>l</sup>7¢ per kWh; <sup>m</sup>95% ethanol converted to 99.5% ethanol for addition to gasoline (T. Patzek, pers. comm., University of California, Berkeley, 2004); <sup>n</sup>20 kg of BOD per 1,000 l of ethanol produced (Kuby, Markoja, and Nackford, 1984).

value, water is pumped from a depth of 100 m (USDA, 1997a). On this basis, the mean energy input associated with irrigation is 320,000 kcal per ha (Table 1).

The average costs in terms of energy and dollars for a large (245–285 million L/yr), modern ethanol plant are listed in Table 2. Note the largest energy inputs are for the corn feedstock, the steam energy, and electricity used in the fermentation/distillation process. The total energy input to produce a liter of ethanol is 6,597 kcal (Table 2). However, a liter of ethanol has an energy value of only 5,130 kcal. Thus, there is a net energy loss of 1,467 kcal of ethanol produced. Not included in this analysis was the distribution energy to transport the ethanol. DOE (2002) estimates this to be 2¢/l or approximately more than 331 kcal/l of ethanol.

In the fermentation/distillation process, the corn is finely ground and approximately 15 l of water are added per 2.69 kg of ground corn. After fermentation, to obtain a gallon of 95% pure ethanol from the 8% ethanol and 92% water mixture, the 1 l of ethanol must come from the approximately 13 l of the ethanol/water mixture. A total of about 13 l of wastewater must be removed per l of ethanol produced and this sewage effluent has to be disposed of at both an energy and economic cost.

Although ethanol boils at about 78°C, whereas water boils at 100°C, the ethanol is not extracted

from the water in just one distillation process. Instead, about 3 distillations are required to obtain the 95% pure ethanol (Maiorella, 1985; Wereko-Brobby and Hagan, 1996; S. Lamberson, pers. comm. Cornell Univ. 2000). To be mixed with gasoline, the 95% ethanol must be processed further and more water removed requiring additional fossil energy inputs to achieve 99.5% pure ethanol (Table 2). The entire distillation accounts for the large quantities of fossil energy required in the fermentation/distillation process (Table 2). Note, in this analysis all the added energy inputs for fermentation/distillation process total \$422.21, including the apportioned energy costs of the stainless steel tanks and other industrial materials (Table 2).

About 50% of the cost of producing ethanol (42¢ per l) in a large-production plant is for the corn feedstock itself (28¢/l) (Table 2). The next largest input is for steam (Table 2).

Based on current ethanol production technology and recent oil prices, ethanol costs substantially more to produce in dollars than it is worth on the market. Clearly, without the more than \$3 billion of federal and state government subsidies each year, U.S. ethanol production would be reduced or cease, confirming the basic fact that ethanol production is uneconomical (National Center for Policy Analysis, 2002). Senator McCain reports that including the direct subsidies for ethanol plus the subsidies for corn grain, a liter costs 79¢ (\$3/gallon) (McCain, 2003). If the production costs of producing a liter of ethanol were added to the tax subsidies, then the total cost for a liter of ethanol would be \$1.24. Because of the relatively low energy content of ethanol, 1.6 l of ethanol have the energy equivalent of 1 l of gasoline. Thus, the cost of producing an equivalent amount of ethanol to equal a liter of gasoline is \$1.88 (\$7.12 per gallon of gasoline), while the current cost of producing a liter of gasoline is 33¢ (USBC, 2003).

Federal and state subsidies for ethanol production that total more than 79¢/l are mainly paid to large corporations (McCain, 2003). To date, a conservative calculation suggests that corn farmers are receiving a maximum of only an added 2¢ per bushel for their corn or less than \$2.80 per acre because of the corn ethanol production system. Some politicians have the mistaken belief that ethanol production provides large benefits for farmers, but in fact the farmer profits are minimal. However, several corporations, such as Archer, Daniels, Midland, are making huge profits from ethanol production (McCain, 2003). The costs to the consumer are greater than the

\$8.4 billion/yr used to subsidize ethanol and corn production because producing the required corn feedstock increases corn prices. One estimate is that ethanol production is adding more than \$1 billion to the cost of beef production (National Center for Policy Analysis, 2002). Because about 70% of the corn grain is fed to U.S. livestock (USDA, 2003a, 2003b), doubling or tripling ethanol production can be expected to increase corn prices further for beef production and ultimately increase costs to the consumer. Therefore, in addition to paying the \$8.4 billion in taxes for ethanol and corn subsidies, consumers are expected to pay significantly higher meat, milk, and egg prices in the market place.

Currently, about 2.81 billion gallons of ethanol (10.6 billion l) are being produced in the United States each year (Kansas Ethanol, 2004). The total automotive gasoline delivered in the U.S. was 500 billion l in 2003 (USCB, 2004). Therefore, 10.6 billion l of ethanol (equivalent to 6.9 billion l of gasoline) provided only 2% of the gasoline utilized by U.S. automobiles each year. To produce the 10.6 billion l of ethanol we use about 3.3 million ha of land. Moreover significant quantities of energy are needed to sow, fertilize, and harvest the corn feedstock.

The energy and dollar costs of producing ethanol can be offset partially by the by-products produced, similar to the dry distillers grains (DDG) made from dry-milling. From about 10 kg of corn feedstock, about 3.3 kg of DDG can be harvested that has 27% protein (Stanton, 1999). This DDG has value for feeding cattle that are ruminants, but has only limited value for feeding hogs and chickens. The DDG generally is used as a substitute for soybean feed that has 49% protein (Stanton, 1999). Soybean production for livestock production is more energy efficient than corn production because little or no nitrogen fertilizer is needed for the production of this legume (Pimentel and others, 2002). Only 2.1 kg of 49% soybean protein is required to provide the equivalent of 3.3 kg of DDG. Thus, the credit fossil energy per liter of ethanol produced is about 445 kcal (Pimentel and others, 2002). Factoring this credit in the production of ethanol reduces the negative energy balance for ethanol production from 29% to 20% (Table 2). Note that the resulting energy output/input comparison remains negative even with the credits for the DDG by-product. Also note that these energy credits are contrived because no one would actually produce livestock feed from ethanol at great costs in fossil energy and soil depletion (Patzek, 2004).

When considering the advisability of producing ethanol for automobiles, the amount of cropland required to grow sufficient corn to fuel each automobile should be understood. To make ethanol production seem positive, we use Shapouri's (Shapouri, Duffield, and Wang, 2002; Shapouri and others, 2004) suggestion that all natural gas and electricity inputs be ignored and only gasoline and diesel fuel inputs be assessed; then, using Shapouri's input/output data results in an output of 775 gallons of ethanol per ha. Because of its lower energy content, this ethanol has the same energy as 512 gallons of gasoline. An average U.S. automobile travels about 20,000 miles/yr and uses about 1,000 gallons of gasoline per yr (USBC, 2003). To replace only a third of this gasoline with ethanol, 0.6 ha of corn must be grown. Currently, 0.5 ha of cropland is required to feed each American. Therefore, even using Shapouri's optimistic data, to feed one automobile with ethanol, substituting only one third of the gasoline used per year, Americans would require more cropland than they need to feed themselves!

Until recently, Brazil had been the largest producer of ethanol in the world. Brazil used sugarcane to produce ethanol and sugarcane is a more efficient feedstock for ethanol production than corn grain (Pimentel and Pimentel, 1996). However, the energy balance was negative and the Brazilian government subsidized the ethanol industry. There the government was selling ethanol to the public for 22¢ per l that was costing them 33¢ per l to produce for sale (Pimentel, 2003). Because of serious economic problems in Brazil, the government has abandoned directly subsidizing ethanol (Spirits Low, 1999; Coelho and others, 2002). The ethanol industry is still being subsidized but the consumer is paying this subsidy directly at the pump (Pimentel, 2003).

#### Environmental Impacts

Some of the economic and energy contributions of the by-products mentioned earlier are negated by the environmental pollution costs associated with ethanol production. These are estimated to be more than 6¢ per l of ethanol produced (Pimentel, 2003). U.S. corn production causes more total soil erosion than any other U.S. crop (Pimentel and others, 1995; NAS, 2003). In addition, corn production uses more herbicides and insecticides than any other crop produced in the U.S. thereby causing more water

### Ethanol Production; Biodiesel Production

pollution than any other crop (NAS, 2003). Further, corn production uses more nitrogen fertilizer than any crop produced and therefore is a major contributor to groundwater and river water pollution (NAS, 2003). In some Western U.S. irrigated corn acreage, for instance, in some regions of Arizona, groundwater is being pumped 10 times faster than the natural recharge of the aquifers (Pimentel and others, 2004b).

All these factors suggest that the environmental system in which U.S. corn is being produced is being rapidly degraded. Further, it substantiates the conclusion that the U.S. corn production system is not environmentally sustainable now or for the future, unless major changes are made in the cultivation of this major food/feed crop. Corn is raw material for ethanol production, but cannot be considered to provide a renewable energy source.

Major air and water pollution problems also are associated with the production of ethanol in the chemical plant. The EPA (2002) has issued warnings to ethanol plants to reduce their air pollution emissions or be shut down. Another pollution problem is the large amounts of wastewater that each plant produces. As mentioned, for each liter of ethanol produced using corn, about 13 l of wastewater are produced. This wastewater has a biological oxygen demand (BOD) of 18,000–37,000 mg/l depending on the type of plant (Kuby, Markoja, and Nackford, 1984). The cost of processing this sewage in terms of energy (4 kcal/kg of BOD) was included in the cost of producing ethanol (Table 2).

Ethanol contributes to air pollution problems when burned in automobiles (Youngquist, 1997; Hodge, 2002, 2003). In addition, the fossil fuels expended for corn production and later in the ethanol plants amount to expenditures of 6,597 kcal of fossil energy per 1,000 l of ethanol produced (Table 2). The consumption of the fossil fuels release significant quantities of pollutants to the atmosphere. Furthermore, carbon dioxide emissions released from burning these fossil fuels contribute to global warming and are a serious concern (Schneider, Rosencranz, and Niles, 2002). When all the air pollutants associated with the entire ethanol system are measured, ethanol production contributes to the serious U.S. air pollution problem (Youngquist, 1997; Pimentel, 2003). Overall, if air pollution problems were controlled and included in the production costs, then ethanol production costs in terms of energy and economics would be significantly increased.

### Negative or Positive Energy Return?

Shapouri (Shapouri and others, 2004) of the USDA now are reporting a net energy positive return of 67%, whereas in this paper, I report a negative 29% deficit. In their last report, Shapouri, Duffield, and Wang (2002) reported a net energy positive return of 34%. Why did ethanol production net return for the USDA nearly double in 2 yr while corn yields in the U.S. declined 6% during the past 2 yr (USDA, 2002, 2003a)? Shapouri results need to be examined.

- (1) Shapouri (Shapouri and others, 2004) omit several inputs, for instance, all the energy required to produce and repair farm machinery, as well as the fermentation-distillation equipment. All the corn production in the U.S. is carried out with an abundance of farm machinery, including tractors, planters, sprayers, harvesters, and other equipment. These are large energy inputs in corn ethanol production, even when allocated on a life cycle basis.
- (2) Shapouri used corn data from only 9 states, whereas we use corn data from 50 states.
- (3) Shapouri reported a net energy return of 67% for the co-products, primarily dried-distillers grain (DDG) used to feed cattle.
- (4) Although we did not allocate any energy related to the impacts that the production of ethanol has on the environment, they are significant in U.S. corn production. (Please see our previous comments on this subject).
- (5) Andrew Ferguson (2004) makes an astute observation about the USDA data. The proportion of sun's energy that is converted into useful ethanol, using the USDA's positive data, only amounts to 5 parts per 10,000. If the figure of 50 million ha were to be devoted to growing corn for ethanol, then this acreage would supply only about 11% of U.S. liquid fuel needs.
- (6) Many other investigators support our type of assessment of ethanol production. (Please see our previous comments on this subject).

### Food Versus Fuel Issue

Using corn, a human food resource, for ethanol production, raises major ethical and moral issues. Today, malnourished (calories, protein, vitamins, iron, and iodine) people in the world number about

3.7 billion (WHO, 2000). This is the largest number of malnourished people and proportion ever reported in history. The expanding world population that now number 6.5 billion complicates the food security problem (PRB, 2004). More than a quarter million people are added each day to the world population, and each of these human beings requires adequate food.

Malnourished people are highly susceptible to various serious diseases; this is reflected in the rapid rise in number of seriously infected people in the world as reported by the World Health Organization (Kim, 2002).

The current food shortages throughout the world call attention to the importance of continuing U.S. exports of corn and other grains for human food. Cereal grains make up 80% of the food of the people worldwide. During the past 10 years, U.S. corn and other grain exports have nearly tripled, increasing U.S. export trade by about \$3 billion per yr (USBC, 2003).

Concerning the U.S. balance of payments, the U.S. is importing more than 61% of its oil at a cost of more than \$75 billion per yr (USBC, 2003). Oil imports are the largest deficit payments incurred by the United States (USBC, 2003). Ethanol production requires large fossil energy input, therefore, it is contributing to oil and natural gas imports and U.S. deficits (USBC, 2003).

At present, world agricultural land based on calories supplies more than 99.7% of all world food (calories), while aquatic ecosystems supply less than 0.3% (FAO, 2001). Already worldwide, during the last decade per capita available cropland decreased 20%, irrigation 12%, and fertilizers 17% (Brown, 1997). Expanding ethanol production could entail diverting valuable cropland from producing corn needed to feed people to producing corn for ethanol factories. The practical aspects, as well as the moral and ethical issues, should be seriously considered before steps are taken to convert more corn into ethanol for automobiles.

#### SWITCHGRASS PRODUCTION OF ETHANOL

The average energy input per hectare for switchgrass production is only about 3.8 million kcal per yr (Table 3). With an excellent yield of 10 t/ha/yr, this suggests for each kcal invested as fossil energy the return is 11 kcal—an excellent return. If pelletized for use as a fuel in stoves, the return is reported to be about 1:14.6 kcal (Samson, Duxbury, and Mulkins,

**Table 3.** Average Inputs and Energy Inputs Per Hectare Per Year for Switchgrass Production

Input	Quantity	10 <sup>3</sup> kcal	Dollars
Labor	5 hr <sup>a</sup>	20 <sup>b</sup>	\$65 <sup>c</sup>
Machinery	30 kg <sup>d</sup>	555	50 <sup>e</sup>
Diesel	100 L <sup>f</sup>	1,000	50
Nitrogen	50 kg <sup>g</sup>	800	28 <sup>e</sup>
Seeds	1.6 kg <sup>h</sup>	100 <sup>e</sup>	3 <sup>f</sup>
Herbicides	3 kg <sup>g</sup>	300 <sup>h</sup>	30 <sup>e</sup>
Total	10,000 kg yield <sup>i</sup> 40 million kcal yield	2,755 input/ output ratio	\$230/ 1:14.4 <sup>k</sup>

<sup>a</sup>Estimated; <sup>b</sup>Average person works 2,000 h per yr and uses about 8,000 l of oil equivalents. Prorated this works out to be 20,000 kcal; <sup>c</sup>The agricultural labor is paid \$13 per h; <sup>d</sup>The machinery estimate also includes 25% more for repairs; <sup>e</sup>Calculated based on data from David Parrish (pers. comm., Virginia Technology University, 2005); <sup>f</sup>Data from Samson, 1991; <sup>g</sup>Calculated based on data from Henning, 1993; <sup>h</sup>100,000 kcal per kg of herbicide; <sup>i</sup>Samson and others, 2000; <sup>j</sup>Brummer and others, 2000 estimated a cost of about \$400/ha for switchgrass production. Thus, the \$268 total cost is about 49% lower than what Brummer and others (2000) estimates and this includes several inputs not included in Brummer and others (2000); <sup>k</sup>Samson and others (2000) estimated an input per output return of 1:14.9, but I have added several inputs not included in Samson and others (2000). The input/output returns, however, are similar.

2004). The 14.6 is higher than the 11 kcal in Table 3, because here a few more inputs were included than in Samson, Duxbury, and Mulkins, (2004) report. The cost per ton of switchgrass pellets ranges from \$94 to \$130 (Samson, Duxbury, and Mulkins, 2004). This seems to be an excellent price per ton.

However, converting switchgrass into ethanol results in a negative energy return (Table 4). The negative energy return is 50% or slightly higher than the negative energy return for corn ethanol production (Tables 2 and 4). The cost of producing a liter of ethanol using switchgrass was 54¢ or 9¢ higher than the 45¢ per l for corn ethanol production (Tables 2 and 4). The two major energy inputs for switchgrass conversion into ethanol were steam and electricity production (Table 4).

#### WOOD CELLULOSE CONVERSION INTO ETHANOL

The conversion of 2,500 kg of wood harvested from a sustainable forest into 1,000 l of ethanol require an input of about 9.0 million kcal (Table 5). Therefore, the wood cellulose system requires slightly

## Ethanol Production; Biodiesel Production

Table 4. Inputs Per 1000 l of 99.5% Ethanol Produced From U.S. Switchgrass

Inputs	Quantities	kcal × 1000 <sup>a</sup>	Costs
Switchgrass	2,500 kg <sup>b</sup>	694 <sup>c</sup>	\$250 <sup>d</sup>
Transport, switchgrass	2,500 kg <sup>e</sup>	300	15
Water	125,000 kg <sup>f</sup>	70 <sup>g</sup>	20 <sup>m</sup>
Stainless steel	3 kg <sup>h</sup>	45 <sup>i</sup>	11 <sup>f</sup>
Steel	4 kg <sup>h</sup>	46 <sup>i</sup>	11 <sup>f</sup>
Cement	8 kg <sup>h</sup>	15 <sup>i</sup>	11 <sup>f</sup>
Grind switchgrass	2,500 kg	100 <sup>h</sup>	8 <sup>h</sup>
Sulfuric acid	118 kg <sup>j</sup>	0	83 <sup>n</sup>
Steam production	8.1 tons <sup>j</sup>	4,404	36
Electricity	660 kWh <sup>j</sup>	1,703	46
Ethanol conversion to 99.5%	9 kcal/L <sup>j</sup>	9	40
Sewage effluent	20 kg (BOD) <sup>k</sup>	69 <sup>l</sup>	6
Total		7,455	\$537

Note. Requires 45% more fossil energy to produce 1 l of ethanol using 2.5 kg switchgrass than the energy in a liter of ethanol. Total cost per liter of ethanol is 54¢. A total of 0.25 kg of brewers yeast (80% water) was produced per 1,000 l of ethanol produced. This brewers yeast has a feed value equivalent in soybean meal of about 480 kcal.

<sup>a</sup>Outputs: 1000 l of ethanol = 5.13 million kcal; <sup>b</sup>Samson (1991) reports that 2.5 kg of switchgrass is required to produce 1 l of ethanol; <sup>c</sup>Data from Table 1 on switchgrass production; <sup>d</sup>Estimated 144 km roundtrip; <sup>e</sup>Pimentel and others, 1988; <sup>f</sup>Estimated water needs for the fermentation program; <sup>g</sup>Slesser and Lewis, 1979; <sup>h</sup>Calculated based on grinder information (Wood Tub Grinders, 2004); <sup>i</sup>Estimated based on cellulose conversion (Arkenol, 2004); <sup>j</sup>95% ethanol converted to 99.5% ethanol for addition to gasoline (T. Patzek, pers. comm., University of California, Berkeley, 2004); <sup>k</sup>20 kg of BOD per 1,000 l of ethanol produced (Kuby, Markoja, and Nactford, 1984); <sup>l</sup>4 kWh of energy required to process 1 kg (Blais and others, 1995); <sup>m</sup>Pimentel, 2003; <sup>n</sup>Sulfuric acid sells for \$7 per kg. It is estimated that the dilute acid is recycled 10 times; <sup>o</sup>Samson, Duxbury, and Mulkins, 2004.

more energy to produce the 1,000 l of ethanol than using switchgrass (Tables 4 and 5). About 57% more energy is required to produce a liter of ethanol using wood than the energy harvested as ethanol.

The ethanol cost per liter for wood-produced ethanol is slightly higher than the ethanol produced using switchgrass, 58¢ versus 54¢, respectively (Tables 4 and 5). The two largest fossil energy inputs in the wood cellulose production system were steam and electricity (Table 5).

## SOYBEAN CONVERSION INTO BIODIESEL

Various vegetable oils have been converted into biodiesel and they work well in diesel engines. An assessment of producing sunflower oil proved to

Table 5. Inputs Per 1000 l of 99.5% Ethanol Produced From U.S. wood cellulose

Inputs	Quantities	kcal × 1000 <sup>a</sup>	Costs
Wood, harvest (fuel)	2,500 kg <sup>b</sup>	400 <sup>c</sup>	\$250 <sup>d</sup>
Machinery	5 kg <sup>m</sup>	100 <sup>m</sup>	10 <sup>o</sup>
Replace nitrogen	50 kg <sup>e</sup>	800	28 <sup>o</sup>
Transport, wood	2,500 kg <sup>e</sup>	300	15
Water	125,000 kg <sup>f</sup>	70 <sup>g</sup>	20 <sup>p</sup>
Stainless steel	3 kg <sup>h</sup>	45 <sup>i</sup>	11 <sup>f</sup>
Steel	4 kg <sup>h</sup>	46 <sup>i</sup>	11 <sup>f</sup>
Cement	8 kg <sup>h</sup>	15 <sup>i</sup>	11 <sup>f</sup>
Grind wood	2,500 kg	100 <sup>h</sup>	8 <sup>h</sup>
Sulfuric acid	118 kg <sup>j</sup>	0	83 <sup>p</sup>
Steam production	8.1 tons <sup>j</sup>	4,404	36
Electricity	666 kWh <sup>j</sup>	1,703	46
Ethanol conversion to 99.5%	9 kcal/L <sup>j</sup>	9	40
Sewage effluent	20 kg (BOD) <sup>j</sup>	69 <sup>k</sup>	6
Total		8,061	\$575

Note. Requires 57% more fossil energy to produce 1 l of ethanol using 2 kg wood than the energy in a liter of ethanol. Total cost per liter of ethanol is 58¢. A total of 0.2 kg of brewers yeast (80% water) was produced per 1,000 l of ethanol produced. This brewers yeast has a feed value equivalent in soybean meal of 467 kcal.

<sup>a</sup>Outputs: 1000 l of ethanol = 5.13 million kcal; <sup>b</sup>Arkenol (2004) reported that 2 kg of wood produced 1 l of ethanol. We question this 2 kg to produce 1 l of ethanol when it takes 2.69 kg of corn grain to produce 1 l of ethanol. Others are reporting 13.2 kg of wood per kg per l of ethanol (DOE, 2004). We used the optimistic figure of 2.5 kg of wood per l of ethanol produced; <sup>c</sup>50 kg of nitrogen removed with the 2,500 kg of wood (Kidd and Pimentel, 1992); <sup>d</sup>Estimated 144 km roundtrip; <sup>e</sup>Pimentel and others, 1988; <sup>f</sup>Estimated water needs for the fermentation program; <sup>g</sup>Slesser and Lewis, 1979; <sup>h</sup>Calculated based on grinder information (Wood Tub Grinders, 2004); <sup>i</sup>95% ethanol converted to 99.5% ethanol for addition to gasoline (T. Patzek, pers. comm., University of California, Berkeley, 2004); <sup>j</sup>20 kg of BOD per 1,000 l of ethanol produced (Kuby, Markoja, and Nactford, 1984); <sup>k</sup>4 kWh of energy required to process 1 kg (Blais and others, 1995); <sup>l</sup>Illinois Corn, 2004; <sup>m</sup>Mead and Pimentel, 2004; <sup>n</sup>Samson, Duxbury, and Mulkins, 2004; <sup>o</sup>Pimentel, 2003; <sup>p</sup>Sulfuric acid sells for \$7 per kg. It is estimated that the dilute acid is recycled 10 times.

be energy negative and costly in terms of dollars (Pimentel, 2001). Although soybeans contain less oil than sunflower, about 18% soy oil compared with 26% oil for sunflower, soybeans can be produced without or nearly zero nitrogen (Table 6). This makes soybeans advantageous for the production of biodiesel. Nitrogen fertilizer is one of the most energy costly inputs in crop production (Pimentel and others, 2002).

The yield of sunflower also is lower than soybeans, 1,500 kg/ha for sunflower compared with 2,668 kg/ha for soybeans (USDA, 2003a). The production of 2,668 kg/ha of soy requires an input of



**Table 6.** Energy Inputs and Costs in Soybean Production Per Hectare in the U.S.

Inputs	Quantity	kcal × 1000	Costs \$
Labor	7.1 h <sup>a</sup>	284 <sup>b</sup>	92.30 <sup>c</sup>
Machinery	20 kg <sup>d</sup>	360 <sup>e</sup>	148.00 <sup>f</sup>
Diesel	38.8 L <sup>g</sup>	442 <sup>h</sup>	20.18
Gasoline	35.7 L <sup>g</sup>	270 <sup>h</sup>	13.36
LP gas	3.3 L <sup>g</sup>	25 <sup>i</sup>	1.20
Nitrogen	3.7 kg <sup>j</sup>	59 <sup>k</sup>	2.29 <sup>l</sup>
Phosphorus	37.8 kg <sup>j</sup>	156 <sup>m</sup>	23.44 <sup>n</sup>
Potassium	14.8 kg <sup>j</sup>	48 <sup>o</sup>	4.59 <sup>p</sup>
Lime	4800 kg <sup>q</sup>	1,349 <sup>d</sup>	110.38 <sup>r</sup>
Seeds	69.3 kg <sup>q</sup>	554 <sup>q</sup>	48.58 <sup>r</sup>
Herbicides	1.3 kg <sup>j</sup>	130 <sup>r</sup>	26.00
Electricity	10 kWh <sup>d</sup>	29 <sup>s</sup>	0.70
Transport	154 kg <sup>t</sup>	40 <sup>u</sup>	46.20
Total		3,746	\$537.22
Soybean yield 2,668 kg/ha <sup>w</sup>		9,605	kcal input: output 1:2.56

<sup>a</sup>Ali and McBride, 1990; <sup>b</sup>It is assumed that a person works 2,000 h per yr and utilizes an average of 8,000 l of oil equivalents per yr; <sup>c</sup>It is assumed that labor is paid \$13 an h; <sup>d</sup>Pimentel and Pimentel, 1996; <sup>e</sup>Machinery is prorated per hectare and a 10 yr life of the machinery. Tractors weigh from 6 to 7 tons and harvesters from 8 to 10 tons, plus plows, sprayers, and other equipment; <sup>f</sup>College of Agri., Consumer and Environ. Sciences, 1997; <sup>g</sup>Input 11,400 kcal per l; <sup>h</sup>Input 10,125 kcal per l; <sup>i</sup>Input 7,575 kcal per l; <sup>j</sup>Economic Research Statistics, 1997; <sup>k</sup>Patzek, 2004; <sup>l</sup>Hinman and others, 1992; <sup>m</sup>Input 4,154 kcal per kg; <sup>n</sup>Cost 62¢ per kg; <sup>o</sup>Input 3,260 kcal per kg; <sup>p</sup>Costs 31¢ per kg; <sup>q</sup>Pimentel and others, 2002; <sup>r</sup>Costs about 70¢ per kg; <sup>s</sup>Input 860 kcal per kWh and requires 3 kWh thermal energy to produce 1 kWh electricity; <sup>t</sup>Goods transported include machinery, fuels, and seeds that were shipped an estimated 1,000 km; <sup>u</sup>Input 0.83 kcal per kg per km transported; <sup>v</sup>Kassel and Tidman, 1999; <sup>w</sup>Mansfield, 2004; Randall and Vetsch, 2004; <sup>x</sup>USDA, 2003a, 2003b.

about 3.7 million kcal per ha and costs about \$537/ha (Table 6).

With a yield of oil of 18% then 5,556 kg of soybeans are required to produce 1,000 kg of oil (Table 7). The production of the soy feedstock requires an input of 7.8 million kcal. The second largest input is steam that requires an input of 1.4 million kcal (Table 7). The total input for the 1,000 kg of soy oil is 11.4 million kcal. With soy oil having an energy value of 9 million kcal, then there is a net loss of 32% in energy. However, a credit should be taken for the soy meal that is produced and this has an energy value of 2.2 million kcal. Adding this credit to soybean oil credit, then the net loss in terms of energy is 8% (Table 7). The price per kg of soy biodiesel is \$1.21, however, taking credit for the soy meal would reduce this price to 92¢ per kg of soy oil (Note, soy oil has a specific gravity of about 0.92, thus soy oil value per liter is 84¢ per l. This makes soy oil about

**Table 7.** Inputs Per 1,000 kg of Biodiesel Oil From Soybeans

Inputs	Quantity	kcal × 1000	Costs \$
Soybeans	5,556 kg <sup>a</sup>	7,800 <sup>a</sup>	\$1,117.42 <sup>a</sup>
Electricity	270 kWh <sup>b</sup>	697 <sup>c</sup>	18.90 <sup>d</sup>
Steam	1,350,000 kcal <sup>b</sup>	1,350 <sup>b</sup>	11.06 <sup>e</sup>
Cleanup water	160,000 kcal <sup>b</sup>	160 <sup>b</sup>	1.31 <sup>e</sup>
Space heat	152,000 kcal <sup>b</sup>	152 <sup>b</sup>	1.24 <sup>e</sup>
Direct heat	440,000 kcal <sup>b</sup>	440 <sup>b</sup>	3.61 <sup>e</sup>
Losses	300,000 kcal <sup>b</sup>	300 <sup>b</sup>	2.46 <sup>e</sup>
Stainless steel	11 kg <sup>f</sup>	158 <sup>f</sup>	18.72 <sup>e</sup>
Steel	21 kg <sup>f</sup>	246 <sup>f</sup>	18.72 <sup>e</sup>
Cement	56 kg <sup>f</sup>	106 <sup>f</sup>	18.72 <sup>e</sup>
Total		11,878	\$1,212.16

Note. The 1,000 kg of biodiesel produced has an energy value of 9 million kcal. With an energy input requirement of 11.9 million kcal, there is a net loss of energy of 32%. If a credit of 2.2 million kcal is given for the soy meal produced, then the net loss is 8%. The cost per kg of biodiesel is \$1.21.

<sup>a</sup>Data from Table 6; <sup>b</sup>Data from Singh, 1986; <sup>c</sup>An estimated 3 kWh thermal is needed to produce a kWh of electricity; <sup>d</sup>Cost per kWh is 7¢; <sup>e</sup>Calculated cost of producing heat energy using coal; <sup>f</sup>Calculated inputs using data from Stesser and Lewis, 1979; <sup>g</sup>Calculated costs from Pimentel, 2003.

2.8 times as expensive as diesel fuel). This makes soy oil expensive compared with the price of diesel that costs about 30¢ per l to produce (USBC, 2003).

Sheehan and others (1998, p. 13) of the Department of Energy also report a negative energy return in the conversion of soybeans into biodiesel. They report "1 MJ of biodiesel requires an input of 1.24 MJ of primary energy."

Soybeans are a valuable crop in the United States. The target price reported by the USDA (2003a) is 21.2¢/kg while the price calculated in Table 6 for average inputs per hectare is 20.1¢/kg. These values are close.

#### SUNFLOWER CONVERSION INTO BIODIESEL

In a preliminary study of converting sunflower into biodiesel fuel, as mentioned, the result in terms of energy output was negative (Pimentel, 2001). In the current assessment, producing sunflower seeds for biodiesel yields 1,500 kg/ha (USDA, 2003a) or slightly higher than the 2001 yield. The 1,500 kg/ha yield is still significantly lower than soybean and corn production per ha.

The production of 1,500 kg/ha of sunflower seeds requires a fossil energy input of 6.1 million kcal (Table 8). Thus, the kcal input per kcal output is negative with a ratio of 1:0.76 (Table 8). Sunflower seeds

## Ethanol Production; Biodiesel Production

Table 8. Energy Inputs and Costs in Sunflower Production Per Ha in the U.S.

Inputs	Quantity	kcal × 1000	Costs \$
Labor	8.6 h <sup>a</sup>	344 <sup>b</sup>	111.80 <sup>c</sup>
Machinery	20 kg <sup>d</sup>	360 <sup>e</sup>	148.00 <sup>f</sup>
Diesel	180 L <sup>g</sup>	1,800 <sup>h</sup>	93.62 <sup>h</sup>
Nitrogen	110 kg <sup>i</sup>	1,760 <sup>k</sup>	68.08 <sup>l</sup>
Phosphorus	71 kg <sup>j</sup>	293 <sup>m</sup>	44.03 <sup>n</sup>
Potassium	100 kg <sup>j</sup>	324 <sup>o</sup>	34.11 <sup>p</sup>
Lime	1000 kg <sup>j</sup>	281 <sup>d</sup>	23.00 <sup>q</sup>
Seeds	70 kg <sup>g</sup>	560 <sup>q</sup>	49.07 <sup>r</sup>
Herbicides	3 kg <sup>j</sup>	300 <sup>r</sup>	60.00 <sup>s</sup>
Electricity	10 kWh <sup>d</sup>	29 <sup>t</sup>	0.70
Transport	270 kg <sup>t</sup>	68 <sup>u</sup>	81.00
Total		6,119	\$601.61
Sunflower yield 1,500 kg/ha <sup>v</sup>		4,650	kcal input: output 1:0.76

<sup>a</sup>Knowles and Bukantis, 1980; <sup>b</sup>It is assumed that a person works 2,000 h per year and utilizes an average of 8,000 l of oil equivalents per yr; <sup>c</sup>It is assumed that labor is paid \$13 an h; <sup>d</sup>Pimentel and Pimentel, 1996; <sup>e</sup>Machinery is prorated per ha and a 10 yr life of the machinery. Tractors weigh from 6 to 7 tons and harvestors from 8 to 10 tons, plus plows, sprayers, and other equipment; <sup>f</sup>College of Agriculture, Consumer and Environ. Sciences, 1997; <sup>g</sup>Input 10,000 kcal per l; <sup>h</sup>\$24 per l; <sup>i</sup>\$20 per kg; <sup>j</sup>Blamey, Zollinger, and Schneiter, 1997; <sup>k</sup>Patzek, 2004; <sup>l</sup>Hinman and others, 1992; <sup>m</sup>Input 4,154 kcal per kg; <sup>n</sup>Cost 62¢ per kg; <sup>o</sup>Input 3,260 kcal per kg; <sup>p</sup>Costs 31¢ per kg; <sup>q</sup>Based on 7,900 kcal per kg of sunflower seed production; <sup>r</sup>Costs about 70¢ per kg; <sup>s</sup>Input 860 kcal per kWh and requires 3 kWh thermal energy to produce 1 kWh electricity; <sup>t</sup>Goods transported include machinery, fuels, and seeds that were shipped an estimated 1,000 km; <sup>u</sup>Input 0.83 kcal per kg per km transported; <sup>v</sup>100,000 kcal of energy required per kg of herbicide; <sup>w</sup>USDA, 2003a, 2003b.

have higher oil content than soybeans, 26% versus 18%. However, the yield of sunflower is nearly one half that of soybean.

Thus, to produce 1,000 kg of sunflower oil requires 3,920 kg of sunflower seeds with an energy input of 156.0 million kcal (Table 9). This is the largest energy input listed in Table 9. Therefore, to produce 1,000 kg of sunflower oil with an energy content of 9 million kcal, the fossil energy input is 118% higher than the energy content of the sunflower biodiesel and the calculated cost is \$1.66 per kg of sunflower oil (Table 9) (Note, the specific gravity of sunflower oil is 0.92, thus the cost of a liter of sunflower oil is \$1.53 per l).

## CONCLUSION

Several physical and chemical factors limit the production of liquid fuels such as ethanol and

Table 9. Inputs Per 1,000 kg of Biodiesel Oil From Sunflower

Inputs	Quantity	kcal × 1000	Costs \$
Sunflower	3,920 kg <sup>a</sup>	15,990 <sup>a</sup>	\$1,570.20 <sup>a</sup>
Electricity	270 kWh <sup>b</sup>	697 <sup>c</sup>	18.90 <sup>d</sup>
Steam	1,350,000 kcal <sup>b</sup>	1,350 <sup>b</sup>	11.06 <sup>e</sup>
Cleanup water	160,000 kcal <sup>b</sup>	160 <sup>b</sup>	1.31 <sup>e</sup>
Space heat	152,000 kcal <sup>b</sup>	152 <sup>b</sup>	1.24 <sup>e</sup>
Direct heat	440,000 kcal <sup>b</sup>	440 <sup>b</sup>	3.61 <sup>e</sup>
Losses	300,000 kcal <sup>b</sup>	300 <sup>b</sup>	2.46 <sup>e</sup>
Stainless steel	11 kg <sup>f</sup>	158 <sup>f</sup>	18.72 <sup>f</sup>
Steel	21 kg <sup>f</sup>	246 <sup>f</sup>	18.72 <sup>f</sup>
Cement	56 kg <sup>f</sup>	106 <sup>f</sup>	18.72 <sup>f</sup>
Total		19,599	\$1,662.48

Note. The 1,000 kg of biodiesel produced has an energy value of 9 million kcal. With an energy input requirement of 19.6 million kcal, there is a net loss of energy of 118%. If a credit of 2.2 million kcal is given for the soy meal produced, then the net loss is 96%. The cost per kg of biodiesel is \$1.66.

<sup>a</sup>Data from Table 8; <sup>b</sup>Data from Singh, 1986; <sup>c</sup>An estimated 3 kWh thermal is needed to produce a kWh of electricity; <sup>d</sup>Cost per kWh is 7¢; <sup>e</sup>Calculated cost of producing heat energy using coal; <sup>f</sup>Calculated inputs using data from Slesser and Lewis, 1979; <sup>g</sup>Calculated costs from Pimentel, 2003.

biodiesel using plant biomass materials. These include the following:

- (1) An extremely low fraction of the sunlight reaching America is captured by plants. On average the sunlight captured by plants is only about 01.%, with corn providing 0.25%. These low values are in contrast to photovoltaics that capture from 10% or more sunlight, or approximately 100-fold more sunlight than plant biomass.
- (2) In ethanol production the carbohydrates are converted into ethanol by microbes, that on average bring the concentration of ethanol to 8% in the broth with 92% water. Large amounts of fossil energy are required to remove the 8% ethanol from the 92% water.
- (3) For biodiesel production, there are two problems: the relatively low yields of oil crops ranging from 1,500 kg/ha for sunflower to about 2,700 kg/ha for soybeans; sunflower averages 25.5% oil, whereas soybeans average 18% oil. In addition, the oil extraction processes for all oil crops is highly energy intensive as reported in this manuscript. Therefore, these crops are poor producers of biomass energy.

## ACKNOWLEDGMENTS

We wish to thank the following people for their helpful comments and suggestions on earlier drafts of the manuscript: A. Ferguson, Senior Researcher, Optimum Population Trust, Manchester, UK; P. Harriot, Chemical Engineering, Cornell University, Ithaca, NY; M. Mrini, Centre Technique des Cultures Sucrières, Kenitra, Morocco; D. Parrish, Crop and Soil Environmental Science, Virginia Technology University, Blacksburg, VA; W. Youngquist, Consulting Geologist, Eugene, OR; M. Pimentel, Division of Nutritional Sciences, Cornell University, Ithaca, NY; A. Wilson, Research Assistant, Cornell University, Ithaca, NY.


## REFERENCES

- Ali, M. B., and McBride, W. D., 1990, Soybeans: state level production costs, characteristics, and input use, 1990: Economic Research Service, Stock no. ERS SB873, 48 p.
- Arkenol, 2004, Our technology: concentrated acid hydrolysis. [www.arkenol.com/Arkenol%20Inc/tech01.html](http://www.arkenol.com/Arkenol%20Inc/tech01.html) (8/2/04).
- Baty, J. C., and Keller, J., 1980, Energy requirements for irrigation, in Pimentel, D., ed., *Handbook of Energy Utilization in Agriculture*: CRC Press, Boca Raton, FL, p. 35-44.
- Blais, J. F., Maouny, K., Nlombi, K., Sasseville, J. L., and Letourneau, M., 1995, Les mesures de efficacité énergétique dans le secteur de l'eau, in Sasseville, J. L., and Blais J. F. eds., *Les Mesures de efficacité Énergétique pour l'épuration des eaux Usées Municipales*: Scientific Rept. 405, Vol. 3, INRS-Eau, Quebec.
- Blamey, F. P. C., Zollinger, R. K., and Schneider, A. A., 1997, Sunflower production and culture, in Schneider, A. A., ed., *Sunflower Technology and Production*: Am. Soc. Agronomy, Madison, WI, p. 595-670.
- Brees, M., 2004, Corn silage budgets for northern, central and southwest Missouri. <http://www.agebb.missouri.edu/mgt/budget/fbm-0201.pdf> (9/1/04).
- Brown, L. R., 1997, The agricultural link: how environmental deterioration could disrupt economic progress: Worldwatch Ins., Washington, DC.
- Brummer, E. C., Burras, C. L., Duffy, M. D., and Moore, K. J., 2000, Switchgrass production in Iowa: economic analysis, soil suitability, and varietal performance: Iowa State Univ., Ames, Iowa.
- CalGasoline, 2002, Ethanol is not a suitable replacement for MTBE. [www.calgasoline.com/factetha.htm](http://www.calgasoline.com/factetha.htm) (9/17/2002).
- Citizens for Tax Justice, 1997, More corporate giveaways high on congressional agenda: Citizens for Tax Justice, July 22, 1997. <http://www.ctj.org/html/cgive97.htm> (9/17/2002).
- Coelho, S. T., Bolognini, M. F., Silva, O. C., and Paletta, C. E. M., 2002, Biofuels in Brazil: the current situation: CENBIO—The National Reference Center on Biomass. Technical Texts. <http://www.cenbio.org.br/in/index.html> (11/12/2002).
- College of Agricultural, Consumer and Environmental Sciences, 1997, Machinery cost estimates: summary of operations: Univ. Illinois Urbana-Champaign. [www.aces.uiuc.edu/~vo-ag/custom.htm](http://www.aces.uiuc.edu/~vo-ag/custom.htm) (11/8/01).
- Croysdale, D., 2001, Belatedly, DNR concedes our air is clean: The Daily Reporter. November 6, 2001. <http://www.dailyreporter.com/editorials/eds/nov07/asa11-7.shtml>. (9/17/2002).
- DOE, 2002, Review of transport issues and comparison of infrastructure costs for a renewable fuels standard: U.S. Dept. Energy, Washington, D.C. <http://tonto.eia.doe.gov/FTPROOT/service/question3.pdf> (10/8/2002).
- DOE, 2004, Dilute acid hydrolysis biomass program. Energy efficiency and renewable energy: U.S. Dept. Energy, Washington, DC. [http://www.eere.energy.gov/biomass/dilute\\_acid.html](http://www.eere.energy.gov/biomass/dilute_acid.html) (11/11/04).
- Duncan, R. C., and Youngquist, W., 1999, Encircling the peak of world oil production: Natural Resources Research, v. 8, no. 3, p. 219-232.
- Economic Research Statistics, 1997, Soybeans: fertilizer use by state, 1996. <http://usda.mannlib.cornell.edu/data-sets/inputs/9X171/97171/agch0997.txt> (11/11/01).
- EPA, 2002, More pollution than they said: ethanol plants said releasing toxins: New York Times, May 3, 2002.
- ERAB, 1980, Gasohol: Energy Research Advisory Board, U.S. Dept. Energy, Washington, DC.
- ERAB, 1981, Biomass energy: Energy Research Advisory Board, U.S. Dept. Energy, Washington, DC.
- FAO, 2001, Food balance sheets: Food and Agriculture Organization of the United Nations, Rome.
- Ferguson, A. R. B., 2003, Implications of the USDA 2002 update on ethanol from corn: The Optimum Population Trust, Manchester, U.K., p. 11-15.
- Ferguson, A. R. B., 2004, Further implications concerning ethanol from corn: Draft manuscript for the Optimum Population Trust.
- Giampietro, M., Ulgiati, S., and Pimentel, D., 1997, Feasibility of large-scale biofuel production: *BioScience*, v. 47, no. 9, p. 587-600.
- Henning, J. C., 1993, Big bluestem, indiangrass and switchgrass: Dept. Agronomy, Campus Extension, Univ. Missouri, Columbia, MO.
- Himman, H., Pelter, G., Kulp, E., Sorensen, E., and Ford, W., 1992, Enterprise budgets for fall potatoes, winter wheat, dry beans and seed peas under rill irrigation: Farm Business Management Repts., Columbia, Washington State Univ., Pullman, WA.
- Ho, S. P., 1989, Global warming impact of ethanol versus gasoline: presented at 1989 National Conf. Clean Air Issues and Am. Motor Fuel Business, October 1989, Washington, DC.
- Hodge, C., 2002, Ethanol use in US gasoline should be banned, not expanded: *Oil & Gas Jour.*, September 9, p. 20-30.
- Hodge, C., 2003, More evidence mounts for banning, not expanding, use of ethanol in gasoline: *Oil & Gas Jour.*, October 6, p. 20-25.
- Hoffman, T. R., Warnock, W. D., and Hinman, H. R., 1994, Crop enterprise budgets, timothy-legume and alfalfa hay, sudan grass, sweet corn and spring wheat under rill irrigation, Kititas County, Washington: Farm Business, Repts. EB 1173, Pullman, Washington State Univ.
- Illinois Corn, 2004, Ethanol's energy balance. [http://www.ilcorn.org/Ethanol/Ethan\\_Studies/Ethan\\_Energy\\_Bal/ethan\\_energy\\_bal.html](http://www.ilcorn.org/Ethanol/Ethan_Studies/Ethan_Energy_Bal/ethan_energy_bal.html) (8/10/04).
- Kansas Ethanol, 2004, Kansas ethanol: clean fuel from Kansas farms. <http://www.ksgrains.com/ethanol/useth.html>. (9/11/04).
- Kassel, P., and Tidman, M., 1999, Ag lime impact on yield in several tillage systems, integrated crop management: Dept. Entomology, Iowa State Univ., Ames, Iowa.

## Ethanol Production; Biodiesel Production

- Kidd, C., and Pimentel, D., 1992, Integrated resource management: Agroforestry for Development: Academic, San Diego, CA.
- Kim, Y., 2002, World exotic diseases, in Pimentel, D., ed., Biological Invasions: Economic and Environmental Costs of Alien Plant, Animal, and Microbe Species: CRC Press, Boca Raton, FL, p. 331-354.
- Knowles, P. F., and Bukantis, R., 1980, Energy inputs and outputs for crop systems, field crops, in Pimentel, D., ed., Handbook of Energy Utilization in Agriculture: CRC Press, Boca Raton, FL, p. 131-132.
- Kuby, W. R., Markoja, R., and Nackford, S., 1984, Testing and evaluation of on-farm alcohol production facilities: Acores Corp. Industrial Environmental Research Lab. Office of Research and Development, U.S. Environmental Protection Agency, Cincinnati, OH, 100 p.
- Larsen, K., Thompson, D., and Harn, A., 2002, Limited and full irrigation comparison for corn and grain sorghum. <http://www.colostate.edu/Depts/SoilCrop/extension/Newsletters/2003/Drought/sorghum.html> (9/2/2002).
- Larson, W. E., and Cardwell, V. B., 1999, History of U.S. corn production. <http://citv.unl.edu/cornpro/html/history/history.html> (9/2/04).
- Lieberman, B., 2002, The ethanol mistake: one bad mandate replaced by another: Competitive Enterprise Ins. <http://www.nationalreview.com/comment/comment-lieberman/031202.shtml> (9/17/2002).
- Maiorella, B., 1985, Ethanol, in Blanch, H. W. Drew, S., and Wang D. I. C., eds., Comprehensive Biotechnology, Chap. 43, Vol. 3: Pergamon, New York.
- McCain, J., 2003, Statement of Senator McCain on the Energy Bill: Press Release. Wednesday, November 2003.
- Mead, D., and Pimentel, D., 2005, Use of energy analysis in silvicultural decision making. Biomass and Bioenergy, in press.
- NAS, 2003, Frontiers in agricultural research: food, health, environment, and communities: Nat. Acad. Sciences, Washington, DC. [http://dels.nas.edu/rpt\\_briefs/frontiers\\_in\\_ag\\_final%20for%20print.pdf](http://dels.nas.edu/rpt_briefs/frontiers_in_ag_final%20for%20print.pdf) (11/05/04).
- NASS, 1999, National Agricultural Statistics Service. <http://usda.mannlib.cornell.edu> (30/08/2002).
- National Center for Policy Analysis, 2002, Ethanol subsidies: Idea House. National Center for Policy Analysis. <http://www.ncpa.org/pd/ag/ag6.html> (9/09/2002).
- NPRA, 2002, NPRA Opposes ethanol mandate; asks Congress not to hinder efforts to maintain supply: National Petrochemical and Refiners Association, Washington, DC. <http://www.nprad.org/news/releases/detail.cfm?docid=164&archive=1> (9/17/2002).
- Patzek, P., 2004, Thermodynamics of the corn-ethanol biofuel cycle: Critical Reviews in Plant Sciences, in press.
- Pimentel, D., 1980, Handbook of energy utilization in agriculture: CRC Press, Boca Raton, FL, 475 p.
- Pimentel, D., 1991, Ethanol fuels: energy security, economics, and the environment: Jour. Agri. Environ. Ethics, v. 4, p. 1-13.
- Pimentel, D., 1998, Energy and dollar costs of ethanol production with corn: Hubbert Center Newsletter #98/2, M. King Hubbert Center for Petroleum Supply Studies, Colorado Sch. Mines. Golden, CO. 7 p.
- Pimentel, D., 2001, The limitations of biomass energy, in Meyers, R., ed., Encyclopedia of Physical Science and Technology. (3rd edn.), Vol. 2: Academic, San Diego, CA, p. 159-171.
- Pimentel, D., 2003, Ethanol fuels: energy balance, economics, and environmental impacts are negative: Natural Resources Research, v. 12, no. 2, p. 127-134.
- Pimentel, D., Berger, B., Filberto, D., Newton, M., Wolfe, B., Karabinakis, E., Clark, S., Poon, E., Abbett, E., and Nandagopal, S., 2004b, Water resources: current and future issues: BioScience, v. 54, no. 10, p. 909-918.
- Pimentel, D., Dougherty, R., Carothers, C., Lamberson, S., Bora, N., and Lee, K., 2002, Energy inputs in crop production: comparison of developed and developing countries, in Lal, R., Hansen, D., Uphoff, N., and Slack, S., eds., Food Security and Environmental Quality in the Developing World: CRC Press, Boca Raton, FL, p. 129-151.
- Pimentel, D., Harvey, C., Resosudarmo, P., Sinclair, K., Kurz, D., McNair, M., Crist, S., Sphrit, L., Fitton, L., Saffouri, R., and Blair, R., 1995, Environmental and economic costs of soil erosion and conservation benefits: Science, v. 276, no. 531S, p. 1117-1123.
- Pimentel, D., Houser, J., Preiss, E., White, O., Fang, H., Mesnick, L., Barsky, T., Tariche, S., Schreck, J., and Alpert, S., 1997, Water resources: agriculture, the environment, and society: BioScience, v. 47, no. 2, p. 97-106.
- Pimentel, D., and Pimentel, M., 1996, Food, energy and society: Colorado Univ. Press, Boulder, CO, 363 p.
- Pimentel, D., Pleasant, A., Barron, J., Gaudioso, J., Pollock, N., Chae, E., Kim, Y., Lassiter, A., Schiavoni, C., Jackson, A., Lee, M., and Eaton, A., 2004a, U.S. energy conservation and efficiency: Benefits and costs: Environment Development and Sustainability, v. 6, p. 279-305.
- Pimentel, D., Warneke, A. F., Teel, W. S., Schwab, K. A., Simeox, N. J., Ebert, D. M., Baenisch, K. D., and Aaron, M. R., 1988, Food versus biomass fuel: Socioeconomic and environmental impacts in the United States, Brazil, India, and Kenya: Adv. Food Res. v. 32, p. 185-238.
- PRB, 2004, World Population data sheet: Population Reference Bureau, Washington, DC, 2 p.
- Samson, R., 1991, Switchgrass: a living solar battery for the prairies: Ecological Agriculture Projects, McGill Univ. (Macdonald Campus, Ste-Anne-de-Bellevue, QC, H9X 3V9 Canada. Copyright © 1991 REAP Canada.
- Samson, R., Duxbury, P., Drisdale, M., and Lapointe, C., 2000, Assessment of pelletized biofuels. PERD program: Natural Resources Canada, Contract 23348-8-3145/001/SQ.
- Samson, R., Duxbury, P., and Mulkins, L., 2004, Research and development of fibre crops in cool season regions of Canada: Resource Efficient Agricultural Production-Canada. Box 125, Sainte Anne de Bellevue, Quebec, Canada, H9X 3V9. <http://www.reap-canada.com/Reports/italy.html> (Jun 26, 2004).
- Schneider, S. H., Rosencranz, A., and Niles, J. O., 2002, Climate change policy change: Island Press, Washington, DC, 402 p.
- Shapouri, H., Duffield, J., McAloon, A., and Wang, M., 2004, The 2001 Net Energy Balance of Corn-Ethanol (Preliminary): US Dept. Agriculture, Washington, DC.
- Shapouri, H., Duffield, J. A., and Wang, M., 2002, The energy balance of corn ethanol: an update: USDA, Office of Energy Policy and New Uses, Agricultural Economics. Rept. No. 813. 14 p.
- Sheehan, J., Camobreco, V., Duffield, J., Graboski, M., and Shapouri, H., 1998, An overview of biodiesel and petroleum diesel life cycles: Nrel/tp-580-24772. National Renewable Energy Laboratory. U.S. Dept. of Energy.

- Singh, R. P., 1986, Energy accounting of food processing, in Singh, R. P., ed., *Energy in Food Processing*: Elsevier, Amsterdam, p. 19-68.
- Slesser, M., and Lewis, C., 1979, *Biological energy resources*: Halsted, New York.
- Spirits Low, 1999, Spirits low as Brazil alcohol car in trouble anew: Reuters. November 22, 1999. <http://www.climateark.org/articles/1999/alcocaro.htm> (11/15/04).
- Stanton, T. L., 1999, Feed composition for cattle and sheep: Colorado State Univ. Cooperative extension. Rept. No. 1.615. 7 p.
- USCB, 2003, *Statistical abstract of the United States 2003*: U.S. Census Bureau, U.S. Government Printing Office, Washington, DC.
- USCB, 2004, *Statistical abstract of the United States 2003*: U.S. Census Bureau, U.S. Government Printing Office, Washington, DC.
- USDA, 1991, *Corn-state. costs of production*: U.S. Dept. Agriculture, Economic Research Service, Economics and Statistics System, Washington, D.C. Stock #94018.
- USDA, 1997a, *Farm and ranch irrigation survey (1998)*. 1997: Census of Agriculture. Vol. 3, Spec. Studies, Part 1. 280 p.
- USDA, 1997b, 1997 Census of agriculture: U.S. Dept. Agriculture. <http://www.nctap.org>. (8/28/2002).
- USDA, 2002, *Agricultural statistics*: U.S. Government Printing Office, Washington, DC.
- USDA, 2003a, *Agricultural statistics*: USDA, Washington, DC, 1-1-XV-34 p.
- USDA, 2003b, *Agricultural chemicals and production technology: questions and answers*: Economic Research Service. U.S. Dept. Agriculture. <http://www.ers.usda.gov/Briefing/AgChemicals/Questions/nmqa5.htm> (update 11/12/2002) (9/1/04).
- Wereko-Brobby, C., and Hagan, E. B., 1996, *Biomass conversion and technology*: John Wiley, Chichester.
- WHO, 2000, *Nutrition for health and development: a global agenda for combating malnutrition*. [http://www.who.int/nut/documents/nhd\\_mip\\_2000.pdf](http://www.who.int/nut/documents/nhd_mip_2000.pdf) (11/3/04).
- Wilke, B., and Chaplin, J., 2000, *Fuel saving ideas for farmers: Minnesota/Wisconsin Engineering Notes*. <http://www.bae.umn.edu/extens/ennotes/enspr00/fuelsaving.htm> (9/2/04).
- Wood Tub Grinders, 2004, *Wood tub grinders*. [http://p2library.nfesc.navy.mil/P2\\_Opportunity\\_Handbook/7.111.13.html](http://p2library.nfesc.navy.mil/P2_Opportunity_Handbook/7.111.13.html) (8/3/04).
- Youngquist, W., 1997, *GeoDestinies: the inevitable control of earth resources over nations and individuals*: National Book Company, Portland, OR, 499 p.
- Youngquist, W., and Duncan, R. C., 2003, *North American natural gas: data show supply problems*: *Natural Resources Research*, v. 12, no. 4, p. 229-240.

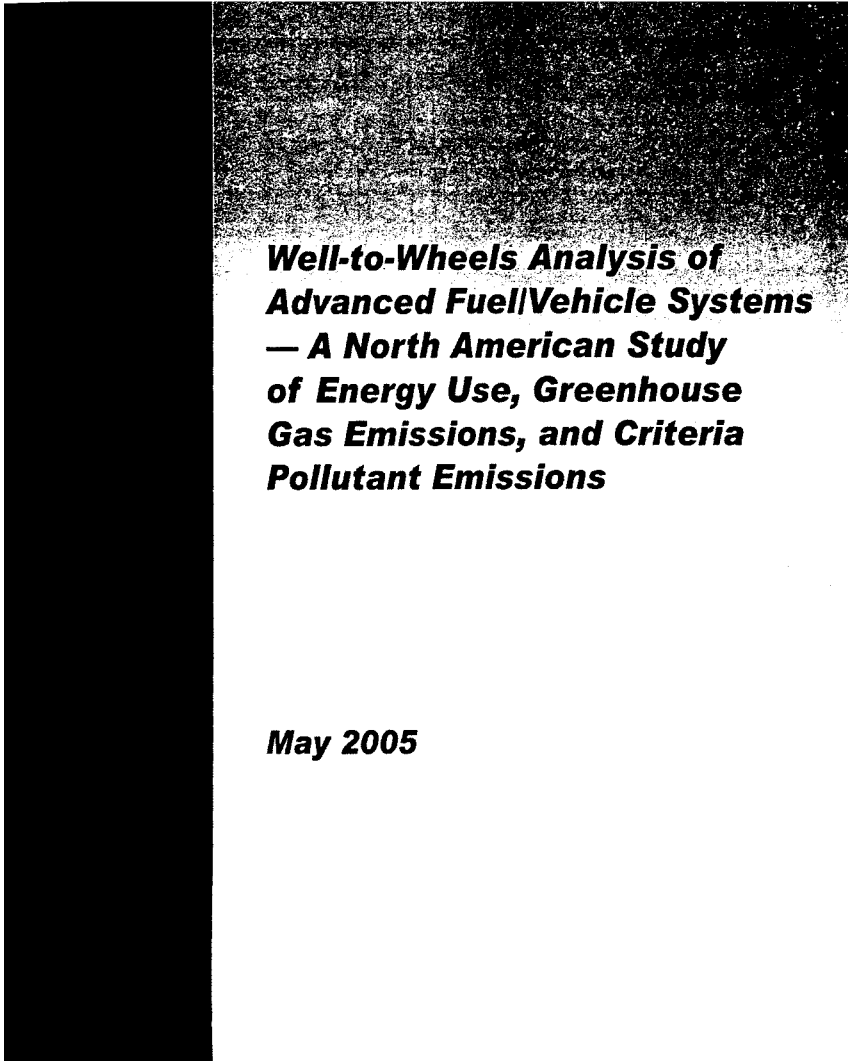

***Well-to-Wheels Analysis of  
Advanced Fuel/Vehicle Systems  
— A North American Study  
of Energy Use, Greenhouse  
Gas Emissions, and Criteria  
Pollutant Emissions***

***May 2005***

---

**Well-to-Wheels Analysis of Advanced  
Fuel/Vehicle Systems — A North American  
Study of Energy Use, Greenhouse Gas  
Emissions, and Criteria Pollutant Emissions**

---

Norman Brinkman, General Motors Corporation  
Michael Wang, Argonne National Laboratory  
Trudy Weber, General Motors Corporation  
Thomas Darlington, Air Improvement Resource, Inc.

May 2005

## Contents

Notation .....	x
Executive Summary .....	1
ES.1 Background.....	1
ES.2 Methodology.....	1
ES.3 Results .....	2
ES.4 Conclusions .....	8
ES.5 Study Limitations .....	8
1. Introduction .....	11
2. Methodologies and Fuel/Vehicle System Options .....	13
2.1 Fuel Production Simulation Methodologies and Pathways .....	13
2.1.1 The GREET Model.....	13
2.1.2 Fuel Production Pathways .....	16
2.1.2.1 Petroleum to Gasoline, Diesel, and Naphtha.....	18
2.1.2.2 Natural Gas to Compressed Natural Gas.....	19
2.1.2.3 Natural Gas to Methanol .....	19
2.1.2.4 Natural Gas to Fischer-Tropsch Diesel and Fischer-Tropsch Naphtha .....	20
2.1.2.5 Natural Gas to Gaseous and Liquid Hydrogen.....	20
2.1.2.6 Electricity to Gaseous and Liquid Hydrogen via Electrolysis of Water.....	21
2.1.2.7 Biomass to Ethanol.....	21
2.1.3 Fuel Production Assumptions.....	22
2.1.3.1 Assumptions Related to Energy and GHG Emissions .....	22
2.1.3.2 Assumptions Related to Criteria Pollutant Emissions.....	25
2.2 Tank-to-Wheels Technology Options and Simulation Methodologies .....	53
2.2.1 Tank-to-Wheels Vehicle Propulsion Options .....	53
2.2.2 Tank-to-Wheels Vehicle Propulsion System Simulations.....	54
2.2.2.1 Vehicle Simulation Approach .....	55
2.2.2.2 Vehicle Performance Criteria.....	57
2.2.2.3 Propulsion System Architecture.....	58
2.2.2.4 Estimation of Vehicle Criteria Emissions Factors.....	62
2.3 Well-to-Wheels Vehicle/Fuel Systems.....	68
3. Tank-to-Wheels Simulated Fuel Economy and Performance Results.....	73
3.1 Fuel Economy and Performance Results.....	73
3.2 Discussion of Tank-to-Wheel Fuel Economy Results.....	78
4. Well-to-Wheels Results.....	79



**Contents (Cont.)**

4.1	Results for 18 Selected Propulsion Systems.....	86
4.1.1	Total Energy Use.....	86
4.1.2	Fossil Energy Use.....	89
4.1.3	Petroleum Use.....	90
4.1.4	GHG Emissions.....	91
4.1.5	CO <sub>2</sub> Emissions.....	93
4.1.6	CH <sub>4</sub> Emissions.....	94
4.1.7	N <sub>2</sub> O Emissions.....	94
4.1.8	Total/Urban VOC Emissions.....	95
4.1.9	Total/Urban CO Emissions.....	97
4.1.10	Total/Urban NO <sub>x</sub> Emissions.....	99
4.1.11	Total/Urban PM <sub>10</sub> Emissions.....	102
4.1.12	Total/Urban SO <sub>x</sub> Emissions.....	105
4.2	Specific Issues: Well-to-Wheels Results for Selected Vehicle/Fuel Systems.....	106
4.2.1	WTW Energy Use Results by Type of Energy Sources.....	107
4.2.2	WTW Emissions of GHGs, CO <sub>2</sub> , CH <sub>4</sub> , and N <sub>2</sub> O.....	109
4.2.3	Benefits of Vehicle Hybridization.....	109
4.2.4	Effects of Use of NA and NNA NG for Fuel Production.....	115
4.2.5	WTW Energy and Emission Reduction Benefits of ICE HEVs and Fuel Cell HEVs.....	121
4.2.6	Comparisons of Hydrogen Production Pathways.....	128
4.2.7	Comparisons of Renewable Fuels and Non-Renewable Fuels.....	134
4.2.8	Comparisons of Selected NG-Based Fuel Pathways.....	140
4.2.9	Comparison of Electrolysis Hydrogen between the U.S. Electricity Generation Mix and the California Electricity Generation Mix.....	146
4.2.10	Effects of Power Plant Emission Reductions Resulting from the Interstate Air Quality Rule Adopted by EPA.....	157
4.2.11	Comparison of Bin 5 vs. Bin 2 Hydrogen ICE Vehicle Technologies.....	157
5.	Conclusions.....	165
6.	Study Limitations.....	169
7.	Acknowledgments.....	171
8.	References.....	173
	Appendix A: Analysis of the National Emission Inventory Database.....	A-1
	Appendix B: Generation of Emission Factor Distributions.....	B-1
	Appendix C: Well-to-Tank Energy and Emissions Results.....	C-1
	Appendix D: Well-to-Wheels Results.....	D-1

## Figures

ES-1	Change in Tank-to-Wheels Gasoline-Equivalent Fuel Consumption for Selected Propulsion Systems Relative to Gasoline Spark-Ignition Conventional Drive .....	3
ES-2	Summary of Well-to-Wheels Energy Use and Emissions for Selected Pathways.....	4
ES-3	Summary of WTW Emissions in Urban Areas for Selected Pathways .....	6
1-1	Scope of a Well-to-Wheels Analysis for Fuel/Vehicle Systems .....	11
2-1	Calculation Logic for Well-to-Tank Energy Use and Emissions for Activities Related to Production of Feedstocks and Fuels .....	14
2-2	Calculation Logic for Well-to-Tank Energy Use and Emissions for Activities Related to Transportation of Feedstocks and Fuels .....	15
2-3	Energy Feedstocks and Fuels Examined in this Study .....	16
2-4	Steps Performed in the Extraction and Refinement of Emissions Data .....	30
2-5	NO <sub>x</sub> Emissions Distribution for NG Boiler Combustion Sources.....	39
2-6	NO <sub>x</sub> Emissions Distribution for Industrial Coal Boiler Combustion Sources.....	40
2-7	NO <sub>x</sub> Emissions Distribution for Oil Boiler Combustion Sources .....	40
2-8	PM <sub>10</sub> Emissions Distribution for Oil Boiler Combustion Sources.....	41
2-9	NO <sub>x</sub> Emissions Distribution for NG Turbine Combustion Sources.....	41
2-10	NO <sub>x</sub> Emissions Distribution for Gasoline Refining Processes.....	42
2-11	PM <sub>10</sub> Emissions Distribution for Gasoline Refining Processes .....	43
2-12	VOC Emissions Distribution for Gasoline Refining Processes.....	43
2-13	VOC Emissions Distribution for Gasoline Bulk Terminals .....	44
2-14	VOC Emissions Distribution for Gasoline Refueling Stations.....	44
2-15	VOC Emissions Distribution for Ethanol Production Processes .....	45
2-16	PM <sub>10</sub> Emissions Distribution for Ethanol Production Processes .....	46
2-17	NO <sub>x</sub> Emissions Distribution for Hydrogen Production by NG Steam Methane Reforming Process.....	46

**Figures (Cont.)**

2-18	PM <sub>10</sub> Emissions Distribution for Hydrogen Production by NG Steam Methane Reforming Process.....	47
2-19	PM <sub>10</sub> Emissions for Underground Coal/Lignite Mining Process.....	48
2-20	NO <sub>x</sub> Emissions for Utility Coal Boilers.....	52
2-21	SO <sub>2</sub> Emissions for Utility Coal Boilers.....	52
2-22	NO <sub>x</sub> Emissions for Utility NG Boilers.....	53
2-23	NO <sub>x</sub> Emissions for Utility NG Combined Cycle Turbines.....	53
2-24	Reverse Analysis for Vehicle Duty-Cycle Simulation.....	55
2-25	Reverse Analysis for Maximum Performance Simulation.....	56
2-26	Definition of Vehicle Efficiency.....	57
2-27	Minimum Vehicle Performance Requirements.....	58
2-28	Conventional Drive or Non-Hybrid Powertrain Architecture.....	59
2-29	Parallel HEV Architecture.....	60
2-30	Fuel Cell/Fuel Processor Powertrain Architecture.....	61
2-31	Fuel Cell/Fuel Processor HEV Architecture.....	62
2-32	Emissions Distribution Function for Bin 5 Vehicle NO <sub>x</sub> Emissions.....	67
3-1	Fuel Economy Predictions with Superimposed Best-Case and Worst-Case Scenarios.....	77
3-2	Fuel Economy Distribution for Baseline Gasoline Displacement on Demand Spark-Ignition Conventional Drive.....	77
3-3	Fuel Economy Distribution for Hydrogen Fuel Cell Vehicle.....	78
4-1	WTW Total Energy Use of 18 Vehicle/Fuel Systems.....	87
4-2	Energy Accounting System for Different Fuels in GREET.....	88
4-3	WTW Fossil Energy Use of 18 Vehicle/Fuel Systems.....	89
4-4	WTW Petroleum Use of 18 Vehicle/Fuel Systems.....	91
4-5	WTW GHG Emissions of 18 Vehicle/Fuel Systems.....	92

**Figures (Cont.)**

4-6	WTW CO <sub>2</sub> Emissions of 18 Vehicle/Fuel Systems .....	93
4-7	WTW CH <sub>4</sub> Emissions of 18 Vehicle/Fuel Systems .....	94
4-8	WTW N <sub>2</sub> O Emissions of 18 Vehicle/Fuel Systems .....	95
4-9	WTW Total VOC Emissions of 18 Vehicle/Fuel Systems.....	96
4-10	WTW Urban VOC Emissions of 18 Vehicle/Fuel Systems .....	97
4-11	WTW Total CO Emissions of 18 Vehicle/Fuel Systems.....	98
4-12	WTW Urban CO Emissions of 18 Vehicle/Fuel Systems .....	98
4-13	WTW Total NO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems.....	100
4-14	WTW Urban NO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems .....	100
4-15	WTW Total PM <sub>10</sub> Emissions of 18 Vehicle/Fuel Systems .....	103
4-16	WTW Urban PM <sub>10</sub> Emissions of 18 Vehicle/Fuel Systems.....	103
4-17	WTW Total SO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems .....	105
4-18	WTW Urban SO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems.....	106
4-19	WTW Total Energy Use, Fossil Energy Use, and Petroleum Energy Use of Selected Vehicle/Fuel Systems.....	108
4-20	WTW GHG and CO <sub>2</sub> Emissions of Nine Vehicle/Fuel Systems .....	110
4-21	WTW CH <sub>4</sub> and N <sub>2</sub> O Emissions of Nine Vehicle/Fuel Systems .....	110
4-22	WTW Effects of Vehicle Hybridization: Total Energy Use.....	111
4-23	WTW Effects of Vehicle Hybridization: Fossil Energy Use.....	112
4-24	WTW Effects of Vehicle Hybridization: GHG Emissions .....	113
4-25	WTW Effects of Vehicle Hybridization: Urban NO <sub>x</sub> Emissions.....	114
4-26	WTW Effects of North American NG vs. Non-North American NG: Total Energy Use .....	116

**Figures (Cont.)**

4-27	WTW Effects of North American NG vs. Non-North American NG: Fossil Energy Use.....	117
4-28	WTW Effects of North American NG vs. Non-North American NG: GHG Emissions .....	118
4-29	WTW Effects of North American NG vs. Non-North American NG: Total NO <sub>x</sub> Emissions.....	119
4-30	WTW Effects of North American NG vs. Non-North American NG: Urban NO <sub>x</sub> Emissions .....	120
4-31	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Total Energy Use .....	122
4-32	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Fossil Energy Use .....	123
4-33	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: GHG Emissions .....	124
4-34	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban VOC Emissions.....	125
4-35	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban NO <sub>x</sub> Emissions.....	126
4-36	WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban PM <sub>10</sub> Emissions ....	127
4-37	WTW Total Energy Use of Hydrogen Production Options.....	129
4-38	WTW GHG Emissions of Hydrogen Production Options.....	130
4-39	WTW Total NO <sub>x</sub> Emissions of Hydrogen Production Options.....	131
4-40	WTW Urban NO <sub>x</sub> Emissions of Hydrogen Production Options .....	132
4-41	WTW Urban PM <sub>10</sub> Emissions of Hydrogen Production Options .....	133
4-42	Comparison of Non-Renewable and Renewable Fuels: WTW Total Energy Use .....	135
4-43	Comparison of Non-Renewable and Renewable Fuels: WTW Fossil Energy Use .....	136
4-44	Comparison of Non-Renewable and Renewable Fuels: WTW GHG Emissions .....	137
4-45	Comparison of Non-Renewable and Renewable Fuels: WTW Total NO <sub>x</sub> Emissions .....	138
4-46	Comparison of Non-Renewable and Renewable Fuels: WTW Urban NO <sub>x</sub> Emissions .....	139
4-47	Comparison of NG-Based Systems: WTW Fossil Energy Use.....	141

**Figures (Cont.)**

4-6	WTW CO <sub>2</sub> Emissions of 18 Vehicle/Fuel Systems .....	93
4-7	WTW CH <sub>4</sub> Emissions of 18 Vehicle/Fuel Systems .....	94
4-8	WTW N <sub>2</sub> O Emissions of 18 Vehicle/Fuel Systems .....	95
4-9	WTW Total VOC Emissions of 18 Vehicle/Fuel Systems.....	96
4-10	WTW Urban VOC Emissions of 18 Vehicle/Fuel Systems .....	97
4-11	WTW Total CO Emissions of 18 Vehicle/Fuel Systems.....	98
4-12	WTW Urban CO Emissions of 18 Vehicle/Fuel Systems .....	98
4-13	WTW Total NO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems.....	100
4-14	WTW Urban NO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems .....	100
4-15	WTW Total PM <sub>10</sub> Emissions of 18 Vehicle/Fuel Systems .....	103
4-16	WTW Urban PM <sub>10</sub> Emissions of 18 Vehicle/Fuel Systems.....	103
4-17	WTW Total SO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems .....	105
4-18	WTW Urban SO <sub>x</sub> Emissions of 18 Vehicle/Fuel Systems.....	106
4-19	WTW Total Energy Use, Fossil Energy Use, and Petroleum Energy Use of Selected Vehicle/Fuel Systems.....	108
4-20	WTW GHG and CO <sub>2</sub> Emissions of Nine Vehicle/Fuel Systems .....	110
4-21	WTW CH <sub>4</sub> and N <sub>2</sub> O Emissions of Nine Vehicle/Fuel Systems .....	110
4-22	WTW Effects of Vehicle Hybridization: Total Energy Use.....	111
4-23	WTW Effects of Vehicle Hybridization: Fossil Energy Use.....	112
4-24	WTW Effects of Vehicle Hybridization: GHG Emissions .....	113
4-25	WTW Effects of Vehicle Hybridization: Urban NO <sub>x</sub> Emissions.....	114
4-26	WTW Effects of North American NG vs. Non-North American NG: Total Energy Use .....	116

**Figures (Cont.)**

4-48	Comparison of NG-Based Systems: WTW GHG Emissions .....	142
4-49	Comparison of NG-Based Systems: WTW Urban VOC Emissions .....	143
4-50	Comparison of NG-Based Systems: WTW Urban NO <sub>x</sub> Emissions .....	144
4-51	Comparison of NG-Based Systems: WTW Urban PM <sub>10</sub> Emissions.....	145
4-52	Comparison of U.S. and California Electricity Generation Mixes: WTW Total Energy Use .....	148
4-53	Comparison of U.S. and California Electricity Generation Mixes: WTW Fossil Energy Use .....	149
4-54	Comparison of U.S. and California Electricity Generation Mixes: WTW GHG Emissions .....	150
4-55	Comparison of U.S. and California Electricity Generation Mixes: WTW Total NO <sub>x</sub> Emissions .....	151
4-56	Comparison of U.S. and California Electricity Generation Mixes: WTW Urban NO <sub>x</sub> Emissions .....	152
4-57	Comparison of U.S. and California Electricity Generation Mixes: WTW Total PM <sub>10</sub> Emissions .....	153
4-58	Comparison of U.S. and California Electricity Generation Mixes: WTW Urban PM <sub>10</sub> Emissions.....	154
4-59	Comparison of U.S. and California Electricity Generation Mixes: WTW Total SO <sub>x</sub> Emissions.....	155
4-60	Comparison of U.S. and California Electricity Generation Mixes: WTW Urban SO <sub>x</sub> Emissions .....	156
4-61	Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Total NO <sub>x</sub> Emissions.....	158
4-62	Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Urban NO <sub>x</sub> Emissions .....	159
4-63	Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Total SO <sub>x</sub> Emissions .....	160
4-64	Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Urban SO <sub>x</sub> Emissions.....	161

**Figures (Cont.)**

4-65	Comparison of Hydrogen ICE Technologies Meeting Bin 5 and Bin 2 NO <sub>x</sub> Standards: WTW Total NO <sub>x</sub> Emissions.....	162
4-66	Comparison of Hydrogen ICE Technologies Meeting Bin 5 and Bin 2 NO <sub>x</sub> Standards: WTW Urban NO <sub>x</sub> Emissions.....	163

**Tables**

2-1	WTT Fuel Pathway Options Analyzed in Phase 2 Study.....	17
2-2	Properties of Fuels Included in this Study.....	18
2-3	Key Parametric Assumptions for WTT Energy Efficiencies and GHG Emissions.....	23
2-4	Industries and Area Categories Originally Extracted for Calculation of Emission Factors.....	32
2-5	Fuel-Specific Data for Combustion Sources.....	32
2-6	Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Fuel Combustion.....	36
2-7	Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Non-Combustion Processes.....	37
2-8	Projected Annual Emissions from U.S. Electricity Generation.....	49
2-9	Projected U.S. Electricity Generation Emission Factors.....	49
2-10	Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Electric Power Plants.....	50
2-11	Comparison of Two Methods for Calculating Utility NO <sub>x</sub> Emission Factors.....	50
2-12	TTW Propulsion Systems and Notation Used in this Report.....	54
2-13	Tier 2 Full-Useful-Life Exhaust Emission Standards.....	63
2-14	Emission Standards Assumed for Hybrid and Non-Hybrid Propulsion Systems.....	63
2-15	Emission Results of 2010-MY Bin 5 and Bin 2 Light-Duty Truck 3 Vehicles in CY 2016 Generated by MOBILE6.2 and EMFAC2002.....	65
2-16	PM <sub>10</sub> Emissions of 2010-MY Bin 5 and Bin 2 Gasoline Light-Duty Truck 3 Vehicles in CY 2016 Generated by MOBILE6.2 and EMFAC2002.....	66



**Tables (Cont.)**

2-17	Parameters of Vehicular Emission Distributions Based on Gamma Distribution Function.....	67
2-18	Assumed Vehicular Emissions Factors for CH <sub>4</sub> and N <sub>2</sub> O .....	69
2-19	WTW Vehicle/Fuel Systems and Notation Used in this Report.....	69
3-1	Best-Estimate Vehicle Fuel Economy Results for ICE CD Propulsion Systems .....	73
3.2	Best-Estimate Vehicle Fuel Economy and Performance Results for ICE Parallel HEV Propulsion Systems with Charge-Sustaining Control Strategy .....	74
3-3	Best-Estimate Vehicle Fuel Economy and Performance Results for Fuel Processor Fuel Cells and Hydrogen Fuel Cells with Conventional and Hybrid Electric Drives .....	75
3-4	Composite Fuel Economy Results for Best-Estimate, Best-Case, and Worst-Case Scenarios.....	76
4-1	Combinations of Fuel Production Pathways and Vehicle Propulsion Technologies Simulated in this Study .....	80
4-2	Energy and Emission Items Analyzed in Phase 2 Study .....	86
4-3	Shares of NO <sub>x</sub> Emissions by Hydrogen Production, Compression, and Liquefaction for Hydrogen-Fueled ICEs and FCVs .....	101
4-4	Shares of PM <sub>10</sub> Emissions by Hydrogen Production, Compression, and Liquefaction for Hydrogen-Fueled ICEs and FCVs.....	104
4-5	Projected U.S. and California Electricity Generation Mixes in 2016.....	146
A-1	Activity Data Sources Used for Process Emission Factor Calculations.....	A-3
A-2	Summary of Combustion Emission Factors .....	A-4
A-3	Summary of Process Emission Factors .....	A-7
A-4	Summary of Electric Utility Emission Factors.....	A-9
B-1	Fuel Combustion Sources.....	B-3
B-2	Non-Combustion Sources.....	B-5
C-1	Well-to-Tank Energy and Emissions Results .....	C-3
D-1	Well-to-Wheels Results.....	D-3

## Notation

### Acronyms and Abbreviations

AA	attainment areas
AIR	Air Improvement Resource, Inc.
ANL	Argonne National Laboratory
ATR	autothermal reforming
CaNAA	nonattainment areas in California
CC	combined cycle
CD	conventional drive
CEM	continuous emissions monitoring
CFR	Code of Federal Regulations
CH <sub>4</sub>	methane
CI	compression-ignition
CNG	compressed natural gas
CO	carbon monoxide
CO <sub>2</sub>	carbon dioxide
CS	charge sustaining
CTR	Center for Transportation Research
CY	calendar year
DI	direct-injection
DOD	displacement on demand
DOE	U.S. Department of Energy
E85	85% ethanol with 15% gasoline by volume
EIA	Energy Information Administration
EPA	U.S. Environmental Protection Agency
ERG	Eastern Research Group
EtOH	ethanol
EV	electric vehicle
FCV	fuel cell vehicle
FE	fossil energy
FT	Fischer-Tropsch
GH <sub>2</sub>	gaseous hydrogen
GHG	greenhouse gas
GM	General Motors Corporation
GREET	Greenhouse gases, Regulated Emissions, and Energy use in Transportation
GVW	gross vehicle weight
GWP	global warming potential
H <sub>2</sub>	hydrogen
HCHO	formaldehyde
HEV	hybrid electric vehicle

HHV	higher heating value
HPSP	Hybrid Powertrain Simulation Program
I&M	inspection and maintenance
IAQR	Interstate Air Quality Rule
ICE	internal combustion engine
IPCC	Intergovernmental Panel on Climate Change
IPM	Integrated Planning Model
LDT	light-duty truck
LEV	low-emission vehicle
LH <sub>2</sub>	liquid hydrogen
LHV	lower heating value
LNG	liquefied natural gas
LPG	liquefied petroleum gas
LS	low-sulfur
MeOH	methanol
MIT	Massachusetts Institute of Technology
MY	model year
N	nitrogen
N <sub>2</sub> O	nitrous oxide
NA	North American
NEI	National Emissions Inventory
NG	natural gas
NGCC	natural-gas-powered combined cycle
NH	non-hybrid
NiMH	nickel metal hydride
NMOG	non-methane organic gas
NNA	non-North American
NonCaNAA	nonattainment areas outside California
NO <sub>x</sub>	nitrogen oxides
NSPS	New Source Performance Standards
NSR	New Source Review
OBD	onboard diagnostic
ORVR	onboard refueling vapor recovery
PE	petroleum energy
PM <sub>10</sub>	particulate matter with a diameter of 10 microns or less
PNGV	Partnership for a New Generation of Vehicles
PTW	pump-to-wheels
R&D	research and development
RACT	Reasonably Available Control Technology
RFG	reformulated gasoline
RVP	Reid vapor pressure

S	sulfur
SCC	Source Classification Code
SI	spark-ignition
SIC	standard industrial classification
SIP	State Implementation Plan
SMR	steam methane reforming
SO <sub>2</sub>	sulfur dioxide
SOC	state-of-charge
SO <sub>x</sub>	sulfur oxides
SULEV	super-ultra-low emission vehicle
SUV	sport utility vehicle
TE	total energy
TTW	tank-to-wheels
UAM	urban airshed model
ULEV	ultra-low emission vehicle
VMT	vehicle miles traveled
VOC	volatile organic compound
WOT	wide open throttle
WTP	well-to-pump
WTT	well-to-tank
WTW	well-to-wheels
ZEV	zero emission vehicle

### Units of Measure

Btu	British thermal unit(s)
ft	foot (feet)
ft <sup>3</sup>	cubic foot (feet)
g	gram(s)
GWh	gigawatt hour(s)
gal	gallon(s)
kWh	kilowatt hour(s)
lb	pound(s)
mi	mile(s)
mmBtu	million British thermal unit(s)
mpg	mile(s) per gallon
mph	mile(s) per hour
MW	megawatt(s)
psi	pound(s) per square inch
s	second(s)
SCF	standard cubic foot (feet)
yr	year(s)

## EXECUTIVE SUMMARY

### ES.1 Background

An accurate assessment of future fuel/propulsion system options requires a complete vehicle fuel-cycle analysis, commonly called a well-to-wheels (WTW) analysis. In this WTW study, we analyzed energy use and emissions associated with fuel production (or well-to-tank [WTT]) activities and energy use and emissions associated with vehicle operation (or tank-to-wheels [TTW]) activities. Energy resources, such as petroleum, natural gas (NG), coal, and biomass, as well as the energy carrier, electricity, are considered as feedstocks to produce various transportation fuels, including gasoline, diesel fuel, hydrogen (H<sub>2</sub>), ethanol (EtOH), compressed natural gas (CNG), methanol (MeOH), and Fischer-Tropsch (FT) diesel. The propulsion systems evaluated were spark-ignition (SI) engines, compression-ignition (CI) engines, hydrogen fuel cells, and fuel processor fuel cells, all in non-hybrid and hybrid electric configurations.

This study updates and supplements a previous (2001) North American study, conducted by GM and others (General Motors [GM] et al. 2001), of energy consumption and greenhouse gas (GHG) emissions associated with advanced vehicle/fuel systems (GM Phase 1 North American study). The primary purpose of this Phase 2 study is to address criteria pollutant emissions, including volatile organic compounds (VOCs), carbon monoxide (CO), nitrogen oxides (NO<sub>x</sub>), particulate matter with a diameter smaller than 10 microns (PM<sub>10</sub>), and sulfur oxide emissions (SO<sub>x</sub>). We also updated the vehicle modeling for energy consumption with the latest powertrain maps and added some additional propulsion systems, such as hydrogen internal combustion engines (ICEs).

As in the previous study, the vehicle modeled was a 2010-model-year, full-sized GM pickup truck. The truck was selected because it is a high seller among light-duty vehicles (cars and trucks) in the U.S. market, and light-duty trucks account for a large proportion of the fuel used in the U.S. vehicle fleet. In our study, we attempted to estimate the energy use and emissions for the 2010-model-year truck fleet over its lifetime. To simplify this effort, we modeled the year 2016 — when the lifetime mileage midpoint for the truck will be reached.

### ES.2 Methodology

Well-to-wheels calculations were based on a fuel-cycle model developed by Argonne National Laboratory (ANL) — the Greenhouse gases, Regulated Emissions, and Energy use in Transportation (GREET) model. Probability-based distribution functions were developed to describe energy use and emissions for individual operations in fuel production and transportation processes, as well as vehicle operations. With the developed distribution functions and a commercial software (Crystal Ball™), GREET employs the Monte Carlo simulation method to address uncertainties in the input parameters and deliver results in the form of a statistical distribution.

Well-to-tank fuel economy and GHG emissions estimates were based on the same assumptions used in the 2001 study (GM et al. 2001), so the WTT emphasis in this study was on developing input assumptions for the criteria pollutants. The starting point for this effort was the U.S. Environmental Protection Agency's (EPA's) National Emissions Inventory (NEI) database. Representative data for each major WTT process were extracted from the inventory and combined with process throughput data to provide emissions factors. Then, on the basis of the inventory data and an assessment of future stationary source emissions controls, we developed distributions to represent expected emissions in 2016.

For the vehicle modeling effort, we characterized the emissions associated with each propulsion system in terms of meeting an emission standard target — an assumed emission certification level for 2010. On the basis of the certification level, we modeled vehicle in-use criteria pollutants by using both EPA's MOBILE and California's EMFAC models. Results for the two models were significantly different, so we established distributions based on the assumption that 80% of the vehicles would have emissions between the EMFAC and MOBILE estimates.

The vehicle fuel economy analysis used a GM proprietary modeling tool to estimate fuel consumption on the U.S. urban and highway driving cycles. The fuel economies generated for the two cycles were then combined together as a 55/45 combined cycle to derive the composite fuel economy for use in WTW simulations in GREET. Input to the model included maps of powertrain efficiency as a function of speed, load, and vehicle mass for each propulsion system. Powertrains and components for each propulsion system were sized to provide equivalent vehicle performance.

### ES.3 Results


The GREET WTW simulations completed for this study show that, in general, fuel production and vehicle operation are two key WTW stages in determining WTW energy use and emissions results. The fuel production stage usually has the largest energy-efficiency losses of all WTT stages. This is true for production of gasoline, diesel, hydrogen, FT diesel, ethanol, methanol, and electricity.

For the vehicle operation stage, the most significant factor in determining WTW results is the fuel consumption of the vehicle technologies. Fuel efficiency (or fuel energy consumption per distance driven) directly determines GHG emissions per mile during operation of vehicles fueled with carbon-containing fuels. Furthermore, fuel consumption directly affects the allocation of WTT emissions (in grams per million Btu [g/mmBtu]) to WTW emissions (in grams per mile [g/mi]). Thus, simulations to determine the fuel consumption values for vehicle technologies are key activities for WTW analyses.

The best estimate of composite fuel economy for the baseline SI vehicle with displacement on demand (DOD) technology was 21.3 mpg, or 4.7 gal/100 mi. Figure ES-1 shows the reduction in fuel consumption, based on gasoline-gallon-equivalent energy, for several advanced propulsion systems. Without hybridization, the diesel direct-injection, compression-ignition (Diesel DI CI) engine with conventional drive and the hydrogen internal combustion engine (H<sub>2</sub> DOD SI) each reduced fuel consumption by 17%. The E85 (85% denatured ethanol with 15% gasoline by volume) flexible-fueled vehicle (E85 DOD SI) had fuel consumption equal to that of gasoline, and the non-hybrid hydrogen fuel cell vehicle (H<sub>2</sub> FCV) reduced gasoline-equivalent fuel consumption by 58%. Hybridization of the gasoline or E85 propulsion systems reduced fuel consumption by 20%. The fuel consumption benefits of hybridization were somewhat smaller for the more-efficient diesel and hydrogen engines (14% and 16%, respectively). The lowest fuel consumption benefit of hybridization (4%) was seen with the hydrogen fuel cell vehicle.

These fuel consumption reductions contribute directly to reductions in WTW energy use and emissions by these advanced vehicle technologies. In the cases in which hydrogen is used to power vehicles, the large reductions in fuel consumption by fuel cell technologies far offset energy-efficiency losses during hydrogen production (except for electrolysis hydrogen production, for which fuel consumption reductions are not enough to offset the large energy losses of electricity generation and hydrogen production together).

Vehicle fuel consumption has a smaller impact on WTW emissions of criteria pollutants (except for SO<sub>x</sub> emissions) for ICE-based technologies. This is because vehicular criteria pollutant emissions are regulated on a per-mile basis, and after-combustion emission control technologies are designed to reduce per-mile emissions, resulting in a disconnection between the amount of fuel consumed and the amount of per-mile criteria pollutant emissions generated. For vehicle technologies that do not generate tailpipe emissions (such as direct-hydrogen FCVs and battery-powered electric vehicles [EVs]), fuel economy directly affects WTW criteria pollutant emissions.

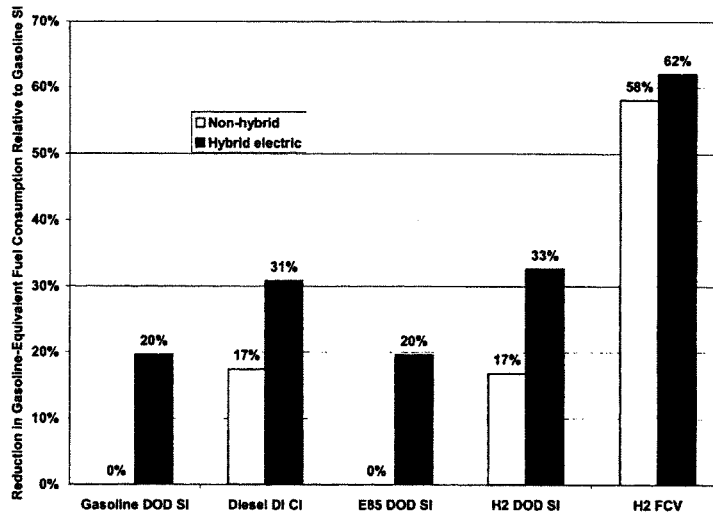

**Figure ES-1 Change in Tank-to-Wheels Gasoline-Equivalent Fuel Consumption for Selected Propulsion Systems Relative to Gasoline Spark-Ignition Conventional Drive**

By using GREET, our research team calculated WTW energy use and emissions for 124 pathways. Figure ES-2 compares WTW energy use and emissions for eight key pathways with those for the gasoline SI baseline. The chart shows total energy use, petroleum energy use, total GHG emissions, and total emissions of three criteria pollutants (NO<sub>x</sub>, VOC, and PM<sub>10</sub>). The first two sets of bars represent advanced petroleum-based vehicles: reformulated gasoline hybrid (RFG DOD SI HEV) and low-sulfur-diesel conventional drive (LS Diesel DI CI CD). The next three sets of bars show results for three vehicles fueled by hydrogen manufactured in central plants from North American natural gas: the gaseous hydrogen internal combustion engine (NA NG Central GH<sub>2</sub> ICE), gaseous hydrogen fuel cell (NA NG Central GH<sub>2</sub> FCV), and liquid hydrogen fuel cell (NA NG Central LH<sub>2</sub> FCV). The next set of bars (Cell. E85 DOD SI CD) shows the effects of using cellulosic (cellulose-derived) ethanol to make E85 for use in a spark-ignition, conventional drive vehicle. Finally, the last two sets of bars (Electro. GH<sub>2</sub> FCV: U.S. kWh and Electro. GH<sub>2</sub> FCV: Renew. kWh) are fuel cell vehicles with electrolysis-derived gaseous hydrogen from U.S. average electricity and from renewable electricity sources.

As shown in Figure ES-2, the advanced petroleum-based ICE vehicles provided moderate reductions in all of the displayed WTW parameters. In general, the effects for gasoline hybrid and diesel were similar,

about a 10–20% reduction compared with the baseline gasoline SI vehicle. An exception was diesel engine VOC emissions, which were low because of diesel’s low volatility.

The hydrogen ICE vehicle modeling results revealed large reductions in petroleum use and VOC emissions compared with the baseline gasoline engine. However, we found increases in total energy use, NO<sub>x</sub> emissions, and PM<sub>10</sub> emissions. Although the hydrogen internal combustion engine was more efficient than the gasoline engine, WTW energy use was high because of the relatively low efficiency of making and transporting hydrogen, compared with that for gasoline. The relatively low efficiency of producing and transporting hydrogen and the operation of steam methane reformers were responsible for part of the increase in NO<sub>x</sub> emissions for the hydrogen internal combustion engine. The NO<sub>x</sub> emissions associated with generating the electricity (U.S. mix) required to compress hydrogen was also significant, accounting for about 20% of the WTW NO<sub>x</sub> emissions. Electricity generation accounted for almost 50% of the WTW PM<sub>10</sub> emissions for the hydrogen engine.

The FCV, shown in the fourth set of bars in Figure ES-2, achieved reductions in all energy and emissions categories except PM<sub>10</sub>. Total energy use, GHG emissions, and NO<sub>x</sub> emissions were all about 50% below the corresponding gasoline values. The PM<sub>10</sub> emissions increase resulted primarily from the emissions associated with generating electricity for hydrogen compression. Comparing the third and fourth sets of bars in Figure ES-2 shows the impact of a fuel-cell-based versus a combustion-engine-based propulsion system operating on the same source of fuel. The FCV’s results were more favorable than those of the combustion engine for all parameters because of two benefits. The most obvious is on the vehicle (TTW) side: fuel cells provide low fuel consumption and generate zero vehicle emissions. However, the low fuel consumption also benefits the WTT energy use and emissions. Reduced fuel consumption per mile results in reduced per-mile energy losses and emissions associated with fuel production and distribution.

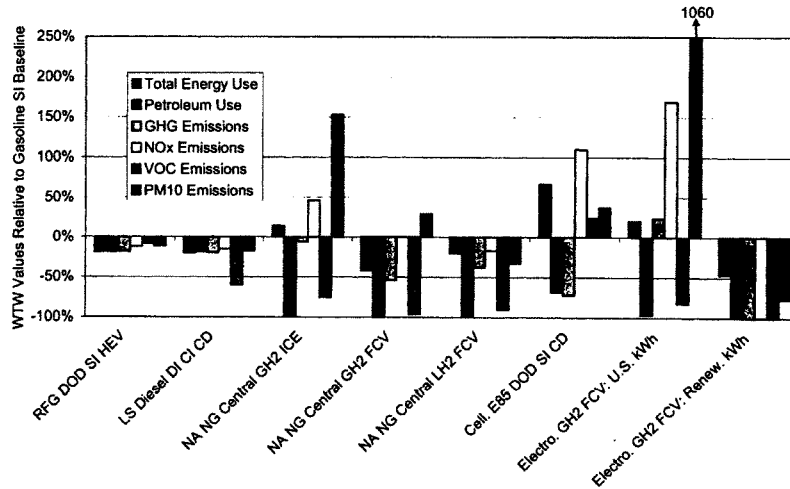


Figure ES-2 Summary of Well-to-Wheels Energy Use and Emissions for Selected Pathways



The liquid hydrogen fuel cell pathway (fifth set of bars in Figure ES-2) showed reductions in all parameters relative to gasoline. However, for all except PM<sub>10</sub>, the relative benefits of liquid hydrogen are smaller than those of gaseous hydrogen. Benefits are reduced because energy losses for liquefying hydrogen are greater than those for compressing hydrogen. PM<sub>10</sub> emissions are lower for the liquid hydrogen because the assumed electricity source is different. Because we assumed that hydrogen compression would take place at the refueling station, the U.S. electricity mix was used. Because liquid hydrogen is easier to transport, we assumed that the hydrogen would be liquefied at a central hydrogen production plant using electricity made at the plant site from NG. So the lower PM<sub>10</sub> emissions for liquid hydrogen result from the use of NG as the fuel source instead of coal, which is a primary source for the U.S. electricity mix that is used for gaseous hydrogen compression.

The final three sets of bars show results for cellulosic ethanol and electricity-based pathways. Both corn-based and cellulosic ethanol were analyzed in this study, but we selected cellulosic E85 for this summary chart to show the potential of renewable fuels. The combustion engine operating on E85 provided about a 70% reduction in petroleum use and GHG emissions compared with gasoline. However, total energy use and NO<sub>x</sub>, VOC, and PM<sub>10</sub> emissions were higher than those for gasoline. These increases all resulted from fuel production (farming operations and ethanol manufacture). Total energy losses and emissions associated with ethanol manufacture are higher than those associated with gasoline refining.

As shown in the last two sets of bars in Figure ES-2, the impacts of FCVs operating on electrolysis-produced hydrogen depend heavily on the source of electricity. Producing hydrogen by means of the U.S. electricity mix is not an attractive option from a WTW perspective. Petroleum use and total VOC emissions decrease substantially compared with gasoline, but GHG, NO<sub>x</sub>, and PM<sub>10</sub> emissions are the highest of any of the pathways because of the relatively low efficiency and high emissions associated with the coal-based power plants that dominate electricity generation in the United States.

The most favorable WTW results were found for the fuel cell operating on hydrogen produced from renewable energy (last set of bars in Figure ES-2). This pathway resulted in zero petroleum use and zero GHG, NO<sub>x</sub>, and VOC emissions. Combustion-based PM<sub>10</sub> emissions were also zero. The remaining vehicle PM<sub>10</sub> emissions resulted from tire and brake wear.

The criteria emissions results illustrated in Figure ES-2 do not take into account the location of the emissions source. GREET can be used to estimate emissions occurring in urban areas. For all pathways, per-mile urban emissions are substantially lower than total emissions. Changes in urban criteria pollutant emissions for the same WTW pathways are shown in Figure ES-3. Considering urban emissions only, reductions make the non-petroleum pathways more attractive. The only increases seen relative to the baseline gasoline system are NO<sub>x</sub> and PM<sub>10</sub> emissions for the hydrogen internal combustion engine and the FCV fueled by hydrogen produced from the U.S. electricity mix.

Because this report addresses energy use and emissions associated with a variety of fuel/propulsion system options, it provides a good starting point in deciding which are the best options for the future. However, our study does not address resource availability, economics, and infrastructure issues — all of which must be considered in selecting the best mix of future propulsion system and fuel options.

Our WTW results show that some advanced vehicle technologies offer great potential for reducing petroleum use, GHG emissions, and criteria pollutant emissions. Modest reductions in petroleum use are attributable to vehicle fuel consumption reductions by advanced vehicle technologies. On the other hand, the switch from petroleum to non-petroleum energy feedstocks, in the case of hydrogen, electricity, CNG, FT diesel, methanol, and ethanol, essentially eliminates the use of petroleum.

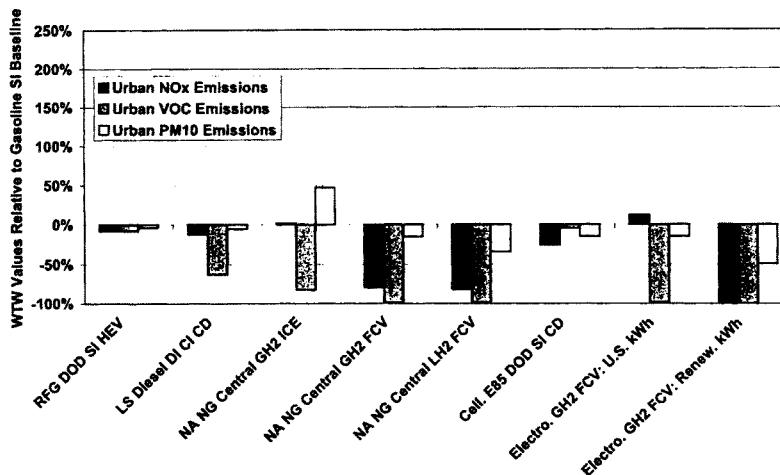


Figure ES-3 Summary of WTW Emissions in Urban Areas for Selected Pathways

The WTW GHG emissions associated with advanced vehicle technologies are determined by the WTT energy efficiencies of the fuel pathways, the vehicle fuel consumption, the carbon content of energy feedstocks used for fuel production, and the renewable nature of those feedstocks. The use of renewable feedstocks (such as renewable electricity and cellulosic ethanol) helps eliminate (or almost eliminate) GHG emissions. Even vehicle technologies with high fuel consumption can still eliminate GHG emissions, because the fuel and its feedstock do not have carbon burdens. For example, the use of renewable hydrogen in hydrogen ICE and fuel cell technologies achieves 100% reductions in GHG emissions. On the other hand, use of cellulosic E85 in ICE technologies achieves reductions of about 70% (the benefits are reduced because E85 contains 26% gasoline by energy content).

The GHG reduction results for advanced vehicles powered by carbon-containing fuels or fuels derived from carbon-containing feedstocks depend on WTT efficiencies and vehicle fuel consumption. For example, FCVs powered by NG-derived hydrogen achieve GHG reductions of about 50% because of the low fuel consumption of direct-hydrogen FCVs. If NG-derived hydrogen is used in hydrogen ICE technologies that are less efficient than hydrogen fuel cell technologies, there may be no GHG reduction benefits. In hydrogen plants, all of the carbon in NG ends up as CO<sub>2</sub>. If CO<sub>2</sub> is captured and stored, this hydrogen production pathway essentially becomes a zero-carbon pathway. Any vehicle technologies using hydrogen produced this way will eliminate GHG emissions. In our analysis, we did not assume carbon capture and storage for central hydrogen plants fueled with NG.

Some of the vehicle technologies and fuels evaluated in this study offer moderate reductions in GHG emissions: corn-based E85 in flexible-fuel vehicles, HEVs powered by hydrocarbon fuels, and diesel-fueled vehicles. In general, these vehicle/fuel systems achieve 20–30% reductions in GHG emissions. The reduction achieved by using corn-based E85 is only moderate because (1) significant amounts of GHG emissions are generated during corn farming and in corn ethanol production plants; (2) diesel fuel, liquefied petroleum gas, and other fossil fuels are consumed during corn farming; (3) a large amount of

nitrogen fertilizer is used for corn farming, and production of nitrogen fertilizer and its nitrification and denitrification in cornfields produce a large amount of GHG emissions; and (4) usually, NG or coal is used in corn ethanol plants to generate steam. If a renewable energy source, such as corn stover or cellulosic biomass, is used in corn ethanol production plants, use of corn-based E85 could result in larger GHG emission reductions.

Hybrids fueled with CNG achieve larger GHG reductions than their fuel consumption reductions, because NG is 21% less carbon-intensive (defined as carbon content per energy unit of fuel) than gasoline (our baseline fuel). On the other hand, diesel ICEs and hybrids achieve smaller GHG reductions than their fuel consumption reductions, because diesel fuel contains 7% more carbon per unit energy than gasoline.

GHG results for hydrogen generated by means of electrolysis may be the most dramatic WTW results in this study. Two major efficiency losses occur during electricity generation and hydrogen production via electrolysis. Consequently, this pathway is subject to the largest WTT energy-efficiency losses. Using hydrogen (itself a non-carbon fuel) produced this way could result in dramatic increases in WTW GHG emissions. For example, if hydrogen is produced with U.S. average electricity (more than 50% of which is generated by coal-fired power plants), its use, even in efficient FCVs, can still result in increased GHG emissions; its use in less-efficient hydrogen ICEs results in far greater increases in GHG emissions. On the other hand, if a clean electricity generation mix, such as the California generation mix, is used, the use of electrolysis hydrogen in FCVs could result in moderate reductions in GHG emissions. Furthermore, if renewable electricity, such as wind power, is used for hydrogen production, the use of hydrogen in any vehicle technology will result in elimination of GHG emissions. This case demonstrates the importance of careful examination of potential hydrogen production pathways so that the intended GHG emission reduction benefits by hydrogen-powered vehicle technologies can truly be achieved.

Ours is the first comprehensive study to address WTW emissions of criteria pollutants. The results reveal that advanced vehicle technologies help reduce WTW criteria pollutant emissions. We assumed in our study that ICE vehicle technologies will, at minimum, meet EPA's Tier 2 Bin 5 emission standards. Improvements in fuel consumption by advanced vehicle technologies will help reduce per-mile WTT criteria pollutant emissions. For example, gasoline or diesel HEVs with low fuel consumption will reduce WTW criteria pollutant emissions by 10–20%, exclusively because of reduced WTT emissions.

Probably the most revealing results are the differences in WTW criteria pollutant emissions between ICE and fuel cell technologies. Although tailpipe criteria pollutant emissions generated by ICE technologies will be reduced significantly in the future, they will continue to be subject to on-road emissions deterioration (although to a much smaller extent than past ICE technologies, thanks to onboard diagnostic systems). On the other hand, FCVs, especially direct-hydrogen FCVs, generate no tailpipe emissions. Except for electrolysis hydrogen generated with U.S. average electricity, hydrogen FCVs reduce WTW emissions of criteria pollutants. For example, NG-derived hydrogen FCVs reduce WTW  $\text{NO}_x$  emissions by about 50%. FCVs also reduce the uncertainty range of criteria pollutant emissions, because they do not experience on-road deterioration of criteria pollutant emissions during the lifetime of motor vehicles.

Vehicle technologies fueled with hydrogen generated via electrolysis usually result in increased criteria pollutant emissions. Power plant emissions, together with the low efficiency of electrolysis hydrogen production, cause the increases. In order to mitigate these increases, power plant emissions will have to be reduced drastically or clean power sources will have to be used for hydrogen production.

Ethanol-based technology options also result in increased total emissions for criteria pollutants, because large amounts of emissions occur during biomass farming and ethanol production. Our study estimates

total and urban emissions of criteria pollutants separately. Although total emissions are increased by the use of ethanol, a significant amount of the total emissions occurs outside of urban areas (on farms and in ethanol plants that will be located near biomass feedstock farms). While total emission results show the importance of controlling ethanol plant emissions, urban emission estimates show that the negative effects of biofuels (such as ethanol) on criteria pollutant emissions are not as severe as total emission results imply. These emissions are likely to be controlled in the future along with other stationary source emissions.

Examination of GHG and criteria pollutant emissions reveals tradeoffs for some vehicle/fuel technologies. For example, while diesel vehicle technologies offer the potential to reduce fuel use and, consequently, to reduce GHG emissions, they may face challenges in reducing NO<sub>x</sub> and PM<sub>10</sub> emissions. Our assumption that diesel vehicles will meet Tier 2 Bin 5 standards by no means understates the technical challenges that automakers face in achieving this goal. On the other hand, FCVs can achieve emission reductions for both GHGs and criteria pollutants — thus offering a long-term solution to emissions of both GHGs and criteria pollutants from the transportation sector.

#### **ES.4 Conclusions**

The results of our WTW analysis of criteria pollutant emissions show that, as tailpipe emissions from motor vehicles continue to decline, WTT activities could represent an increased share of WTW emissions, especially for hydrogen, electricity, ethanol, and FT diesel. Thus, in order to achieve reductions in criteria pollutant emissions by advanced vehicle technologies, close attention should be paid to emissions from WTT, as well as TTW, activities.

Our study analyzed advanced vehicle technologies together with new transportation fuels, because vehicle technologies and fuels together have become increasingly important in seeking solutions to transportation energy and environmental problems. High-quality fuels are necessary to allow introduction of advanced vehicle technologies. For example, low-sulfur gasoline and diesel are needed for gasoline lean-burn and clean-diesel engines. The energy and environmental benefits of FCVs can be guaranteed only by using hydrogen from clean feedstocks and efficient production pathways. In a way, the recent popularization of WTW analyses reflects the new reality — that vehicles and fuels must be considered together in addressing transportation energy and environmental issues.

Our study separates energy use into total energy, fossil energy, and petroleum energy. Separate results for each of the three energy types shed light on the true energy benefits offered by various transportation fuels. For example, some other studies that developed estimates for total energy use showed large increases in energy use for biofuels. But those studies failed to differentiate among the different types of energy sources. An energy pathway that offers a significant reduction in petroleum use may help U.S. domestic energy supply and energy security concerns. In Section 4, we demonstrate that total energy calculations can sometimes be arbitrary. For these reasons, we maintain that the type of energy sources, as well as the amount of energy use, should be considered in evaluating the energy benefits of vehicle/fuel systems.

#### **ES.5 Study Limitations**

Our intent was to evaluate the energy and emission effects of the vehicle/fuel systems included in this study, with the premise that they could be introduced around 2010. Like many other WTW studies, ours did not address the economics and market constraints of the vehicle/fuel systems considered. Costs and commercial readiness may eventually determine which vehicle/fuel systems will be able to penetrate the

vehicle market. The results of this study provide guidance to help ensure that R&D efforts are focused on the vehicle/fuel systems that will provide true energy and emission benefits. Because WTW studies do not usually address economics, consumer acceptance, and many other factors, they cannot determine the marketability of vehicle/fuel systems.

The fuel consumption of vehicle/fuel systems is one of the most important factors in determining WTW results for energy use and emissions, especially GHG emissions. Our analysis based vehicle fuel consumption simulations on the full-size Silverado pickup truck. Compared with a typical passenger car, the pickup truck has higher fuel consumption and higher tailpipe emissions, resulting in higher WTW energy use and emissions per mile. Most other WTW studies were based on passenger cars. Absolute results per mile driven between this study and other completed studies cannot be compared. However, the relative changes that can be derived from per-mile results in this study and other studies can be compared to understand the differences in potential energy and emission benefits of different vehicle and fuel technologies.

Several major WTW studies have been completed in the past several years. For example, the Massachusetts Institute of Technology (MIT) conducted a WTW study in 2000 and updated the study in 2003 (Weiss et al. 2000; 2003). The MIT study was based on a mid-size passenger car. The GM-sponsored European WTW study (L-B-Systemtechnik GmbH et al. 2002) was based on an Opel Zafira minivan with an engine displacement of 1.8 L. A WTW study sponsored by the Joint Research Centre of the European Commission, Concawe, and European Council for Automotive R&D (2003) was based on a typical European compact car similar to the Volkswagen Golf. Comparison of absolute results from these studies and our study are less meaningful, mainly because different vehicle sizes were used in these studies. However, comparison of the relative change results among these studies should improve our understanding of the range of energy and emission benefits of advanced vehicle technologies and new transportation fuels, although such comparisons are beyond the scope of this study.

The fuel consumption improvements of HEVs directly affect their WTW energy and emission benefits. The extent of HEV fuel consumption improvements depends largely on the degree of hybridization and on designed tradeoffs between fuel consumption and vehicle performance. The HEV design simulated in this study was intended to fully meet the performance goals of the conventional Silverado truck. Furthermore, engine downsizing was not assumed here for the best-estimate HEV design. This design decision resulted in smaller fuel consumption reductions by HEVs in this study than could be achieved with downsized engines. Downsized engines were considered in the best-case HEV scenario.

Although we included many hydrogen production pathways in this study, we certainly did not cover every potential hydrogen production pathway. For instance, we included neither hydrogen production via gasification from coal and cellulosic biomass nor hydrogen production via high-temperature, gas-cooled nuclear reactors. R&D efforts are currently in progress for these hydrogen production pathways. For some of the hydrogen production pathways considered in this study (such as hydrogen from NG in central plants), we did not assume carbon capture and storage. Had we done so, those pathways might have been shown to result in huge GHG emission reductions.

Although we addressed uncertainties in our study with Monte Carlo simulations, the results of our simulations depend heavily on probability functions that we established for key WTW input parameters. Data limitations reduced the reliability of the distribution functions we built for some of the key input parameters, such as criteria pollutant emissions associated with key WTT and TTW stages. Nonetheless, systematic simulations of uncertainties in WTW studies could become the norm for future WTW studies.

## 1. INTRODUCTION

Since the 1980s, various transportation fuel-cycle analyses have been conducted to evaluate the energy and environmental impacts associated with fuel/vehicle systems. Earlier transportation fuel-cycle analyses were driven mainly by the introduction of battery-powered electric vehicles (EVs). Current transportation fuel-cycle analyses stem primarily from interest in fuel-cell vehicles (FCVs). While these vehicles could generate zero emissions from the point of view of vehicle operation, there are emissions associated with production and distribution of the fuels (i.e., electricity and hydrogen [H<sub>2</sub>]). An accurate evaluation of the energy and environmental effects associated with these vehicles in relation to those associated with conventional internal combustion engine (ICE) technologies requires a full fuel-cycle analysis. In consumer products research, such analyses are often called "life-cycle" or "cradle-to-grave" analyses. In the transportation field, the fuel-cycle analysis is also referred to as a "well-to-wheels" (WTW) analysis. However, unlike life-cycle analyses, WTW analyses usually do not take into account the energy and emissions required to construct fuel production infrastructure or those required to produce the vehicles.

Figure 1-1 shows the scope of a typical transportation WTW analysis. To allow comparison with conventional analyses covering only vehicle operations, results of a WTW analysis are often separated into two groups: well-to-tank (WTT) and tank-to-wheels (TTW). WTT stages start with fuel feedstock recovery and end with fuels available in vehicle tanks. TTW stages cover vehicle operation activities. Because regulatory agencies have included evaporative emissions of volatile organic compounds (VOCs) that occur during vehicle refueling in calculating emissions for vehicle operation activities, a precise separation of WTW stages for criteria pollutant emissions estimation is more appropriate at the fuel pumps of refueling stations, in order to be consistent with vehicle emissions estimates. Thus, WTW stages are divided into well-to-pump (WTP) and pump-to-wheels (PTW) stages. Although our analysis has been conducted with the WTP and PTW separation, we use the terms WTT and TTW in this report (instead of WTP and PTW) to be consistent with the terms used in the Phase I report prepared by General Motors Corporation (GM) and others.

There are a variety of fuel production pathways (or WTT options) from different energy feedstocks to different transportation fuels. Energy feedstocks for transportation fuel production could include crude oil, natural gas (NG), coal, biomass (grains such as corn and cellulosic biomass), and different energy sources for electricity generation. Transportation fuels for evaluation could include gasoline, diesel, methanol (MeOH), ethanol (EtOH), compressed natural gas (CNG), Fischer-Tropsch (FT) diesel, hydrogen, and electricity. These combinations, plus different production technology options, can result in

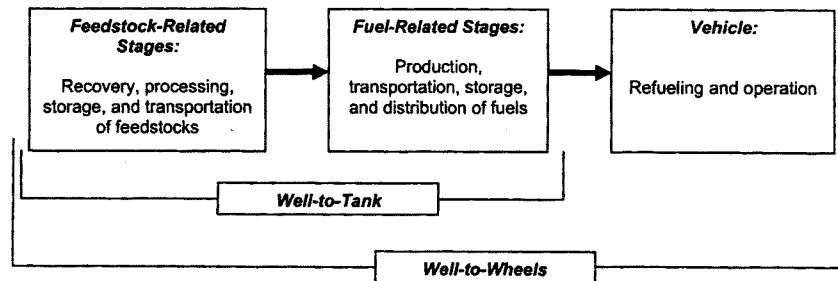


Figure 1-1 Scope of a Well-to-Wheels Analysis for Fuel/Vehicle Systems

many fuel pathways for WTW evaluation. Recent interest has been primarily in NG-based fuels, renewable fuels, and hydrogen.

On the other hand, various vehicle propulsion technologies (TTW technologies) have been promoted for improving vehicle efficiencies, reducing vehicle emissions, and diversifying vehicle fuels. Vehicle propulsion technologies of interest include spark-ignition (SI) engines, direct-injection (DI) compression-ignition (CI) engines, hybrid electric vehicles (HEVs) with SI and CI engines, FCVs, and battery-powered electric vehicles (EVs). These technologies, together with the different fuels used to power them, result in many vehicle/fuel combinations for WTW evaluations.

To provide a systematic basis for comparing advanced propulsion technologies, GM sponsored a series of WTW analyses. The first of these, a North American analysis of energy consumption and greenhouse gas (GHG) emissions associated with a light-duty truck (LDT), was published in 2001 (GM et al. 2001). In this report, we refer to the 2001 study as the GM Phase 1 North American study. Because vehicle type, driving cycle, and fuels infrastructure can impact the results of WTW studies, a similar energy and GHG emissions study was conducted for Europe (GM Phase 1 European study), and the results were published in 2002 (L-B-Systemtechnik GmbH et al. 2002).

Neither of these published studies included the WTW impacts of advanced vehicles and new fuel systems on criteria pollutant emissions. This study, which we refer to as the GM Phase 2 North American study, extends the Phase 1 North American study (GM et al. 2001) to include analysis of criteria pollutants including volatile organic compounds (VOCs), nitrogen oxides ( $\text{NO}_x$ ), carbon monoxide (CO), particulate matter with a diameter smaller than 10 microns ( $\text{PM}_{10}$ ), and sulfur oxides ( $\text{SO}_x$ ). In addition, the vehicle modeling was updated with the latest performance data, and a few additional vehicle propulsion systems were included in the analysis.

Chapter 2 of this report describes the methodologies used in the Phase 2 study, presents fuel production pathways and vehicle propulsion systems, and provides data sources and processing. Chapter 3 presents vehicle fuel consumption results. Chapter 4 presents WTW energy and emission results and discusses key issues identified from the WTW results. Chapter 5 presents conclusions. Chapters 6 and 7 provide acknowledgments and a list of references cited in this report. Appendix A describes our analysis of the national emission inventory (NEI) database. Appendix B presents specific methods used to generate individual distribution functions for emissions associated with WTT activities. Appendices C and D provide tables listing WTT and WTW energy and emission results.

## 2. METHODOLOGIES AND FUEL/VEHICLE SYSTEM OPTIONS

As part of our study, we analyzed 124 different WTW pathways. A pathway is a complete set of assumptions about the resource used, transportation, fuel production, and characteristics of the vehicle using the fuel. These 124 WTW pathways were constructed from 29 WTT fuel production pathways and 22 TTW propulsion systems. Section 2.1 addresses fuel (WTT) production methodologies and pathways; Section 2.2 describes vehicle technology (TTW) methodologies and vehicle propulsion systems; and Section 2.3 presents the fuel/vehicle systems examined in our study.

### 2.1 Fuel Production Simulation Methodologies and Pathways

#### 2.1.1 The GREET Model

In 1995, with funding from the U.S. Department of Energy (DOE), the Center for Transportation Research (CTR) of Argonne National Laboratory (ANL) began to develop a spreadsheet-based model for estimating the full fuel-cycle energy and emissions impacts of alternative transportation fuels and advanced vehicle technologies (Wang 1996). The intent was to provide an analytical tool to allow researchers to readily analyze various parametric assumptions that affect fuel-cycle energy use and emissions associated with various fuels and vehicle technologies. The model, called GREET (Greenhouse gases, Regulated Emissions, and Energy use in Transportation), calculates fuel-cycle energy use in Btu/mi and emissions in g/mi for various transportation fuels and vehicle technologies. For energy use, GREET includes total energy use (all energy sources), fossil energy use (petroleum, natural gas [NG], and coal), and petroleum use (each energy item is a part of the preceding energy item). For emissions, the model includes three major GHGs (carbon dioxide [CO<sub>2</sub>], methane [CH<sub>4</sub>], and nitrous oxide [N<sub>2</sub>O]) and five criteria pollutants (VOCs, CO, NO<sub>x</sub>, PM<sub>10</sub>, and SO<sub>x</sub>).


In the GREET model, the three GHGs are combined together with their global warming potentials (GWPs) to calculate CO<sub>2</sub>-equivalent GHG emissions. The default GWPs in the latest GREET version — 1 for CO<sub>2</sub>, 23 for CH<sub>4</sub>, and 296 for N<sub>2</sub>O — are recommended by the Intergovernmental Panel on Climate Change (IPCC 2001) for the 100-year time horizon. On the other hand, because the location, as well as the amount, of criteria pollutant emissions is important, emissions of the five criteria pollutants are further separated into total and urban emissions. Total emissions are emissions occurring everywhere. Urban emissions, which are a subset of total emissions, are those occurring within urban areas. Urban areas in GREET are metropolitan areas with populations above 125,000, as defined by the U.S. Bureau of the Census. The separation of criteria pollutant emissions is a crude step to provide some information about potential human exposure to criteria pollutant emissions. The separation is based on information regarding facility locations.

Since the release of the first version of GREET, CTR/ANL continues to update and upgrade the model. Development and use of earlier GREET model versions were documented in Wang (1999a, b) and in Wang and Huang (1999). In 2000, CTR/ANL began to work with GM and three energy companies to analyze WTW energy and GHG emission effects associated with advanced fuel/vehicle systems (GM et al. 2001). During this Phase 1 study, stochastic simulation based on the Monte Carlo method was introduced into the GREET model. Because of that effort and other ANL efforts, a new version — GREET 1.6 — was developed (Wang 2001).



The GREET model is in the public domain, and any party can use it free of charge. The model and its associated documents are posted at Argonne's GREET website: <http://www.transportation.anl.gov/software/greet/index.html>.


A WTW analysis includes many WTT activities related to production and transportation of feedstocks and fuels. Figure 2-1 is a simplified diagram showing calculation logic for energy use and emissions associated with WTT production activities. For a given type of fuel production, total energy use is derived from the energy efficiency of each production activity. Then, energy use by each fuel type (e.g., NG, diesel, electricity) is estimated from the estimated total energy use and shares of fuel types. We calculate emissions by using energy use by fuel type, emission factors by fuel type, and combustion technology shares. Finally, urban emissions are estimated from total emissions and a split of facility locations between urban and non-urban locations. For CO<sub>2</sub> emissions, GREET takes a carbon-balance approach. That is, the carbon in CO<sub>2</sub> emissions is equal to the carbon contained in the fuel burned minus the carbon contained in combustion emissions of VOC, CO, and CH<sub>4</sub>. For details on calculation methodologies, see Wang (1999a, b).

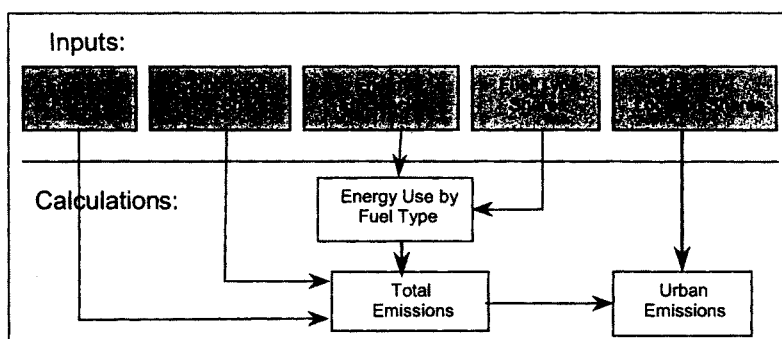

**Figure 2-1 Calculation Logic for Well-to-Tank Energy Use and Emissions for Activities Related to Production of Feedstocks and Fuels**

The GREET model includes detailed simulations for activities related to transportation of feedstocks and fuels. Figure 2-2 schematically shows GREET simulation logic for transportation-related activities. For a given transportation mode (e.g., ocean tanker for crude transportation), input assumptions of energy intensity of the mode, transportation distance, energy use by fuel type, and emission factors by fuel type are specified. GREET then calculates energy use and emissions for the given mode of transporting a product. Transportation of a given product usually involves multiple transportation modes (for example, ocean tankers and pipelines are used for crude transportation). Thus, energy use and emissions for transporting a given product equal the share-weighted average of all the transportation modes for the product.

Detailed assumptions regarding transportation activities, as shown in Figure 2-2, are presented in the GM Phase I report (GM et al. 2001). Simulations of transportation-related activities require specification of transportation logistics for energy feedstocks and fuels. Transportation logistics flowcharts for key feedstocks and fuels are presented in the GM Phase I report. Simulations of transportation activities in the

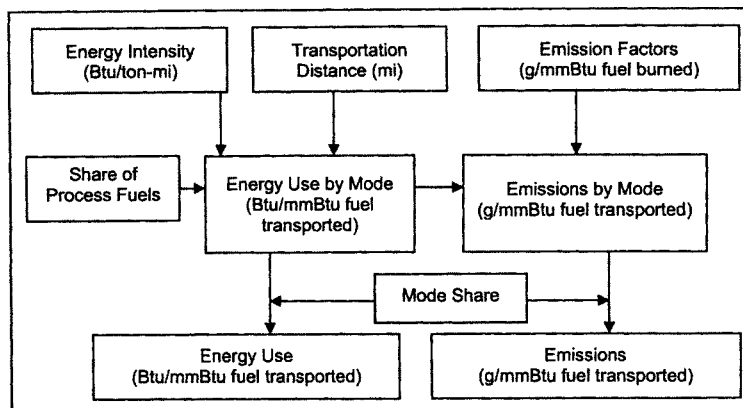

**Figure 2-2 Calculation Logic for Well-to-Tank Energy Use and Emissions for Activities Related to Transportation of Feedstocks and Fuels**

Phase 2 study relied on Phase 1 study logistics specifications. In addition, readers can obtain detailed information regarding simulations of the transportation-related activities addressed in this study from the GREET model.

As Figures 2-1 and 2-2 show, energy use associated with the WTT stages is determined mainly by energy efficiencies (for production-related activities) and energy intensities (for transportation-related activities). Carbon dioxide emissions are then determined by the energy use and the carbon contents of the fuels used. In the Phase 1 GM study, significant efforts were made to determine the energy efficiencies and intensities for key WTT stages. The Phase 2 study relies on the efficiency and intensity results from the Phase 1 study.

For estimation of criteria pollutant emissions, emission factors (in g/mmBtu of process fuel burned) are a key determinant. That is, emissions of criteria pollutants for a given activity are determined by the amount of process fuels used during the activity and the emission factors of the process fuels used. Because criteria pollutant emissions are subject to stringent emission controls, there are no theoretical means of calculating emission factors for the criteria pollutants, except for SO<sub>x</sub>, for which the emission factor, in most cases, can be calculated from the sulfur content of a given process fuel. The majority of the effort in the Phase 2 study has been in establishing emission factors for the various steps involved in the WTT processes. Details regarding these efforts are presented in later sections of this report.

The new GREET version is capable of applying Monte Carlo simulations to address the uncertainties involved in key input parameters. The Phase 2 study, as well as the completed Phase 1 study, uses this GREET feature to generate results with uncertainty ranges. For Monte Carlo simulations, probability distribution functions need to be established for key input parameters. In particular, on the basis of published data for given fuel-cycle stages, ANL established subjective probability distribution functions for each stage. These distribution functions are incorporated into the GREET model. In the Phase 1 study, distribution functions were established for energy efficiencies and GHG emissions of key WTW stages. In the Phase 2 study, distribution functions were established for emission factors (in g/mmBtu of fuel

burned for different combustion technologies used in WTT stages). For the TTW stage, the Phase 1 study established distribution functions for fuel economy associated with various vehicle/fuel systems. For the Phase 2 study, we established distribution functions for vehicular criteria pollutant emissions and revised the distribution functions for fuel economy values from the Phase 1 study.

A commercial software, Crystal Ball™, is used in GREET to design and conduct Monte Carlo simulations. Distribution functions established for the Phase 1 and Phase 2 studies are embedded in the new GREET version. In order to use the new Monte Carlo simulation feature in GREET, users need to have both Excel and Crystal Ball™ software. However, if Crystal Ball™ software is not available, users can still conduct point estimates with the new GREET version in Excel.

### 2.1.2 Fuel Production Pathways

Figure 2-3 illustrates the WTT energy feedstocks and fuels considered this study. Key feedstocks analyzed include oil, NG, and biomass. We also considered the feedstocks currently used to make electricity (including coal, NG, nuclear, and renewables). Starting with these feedstocks, we analyzed various pathways used to make the following fuels: gasoline, diesel, crude naphtha, CNG, methanol, FT naphtha, FT diesel, gaseous hydrogen (GH<sub>2</sub>), liquid hydrogen (LH<sub>2</sub>), ethanol, and E85 (85% denatured ethanol with 15% gasoline by volume).

Figure 2-3 illustrates the overall coverage from feedstocks to fuels of the Phase 2 study, but does not completely describe detailed production options for a given feedstock-to-fuel selection. Important factors for a specific fuel production pathway include the source of NG (North American [NA] or non-North American [NNA] sources) and whether the NG is converted to hydrogen at the fueling station or remotely

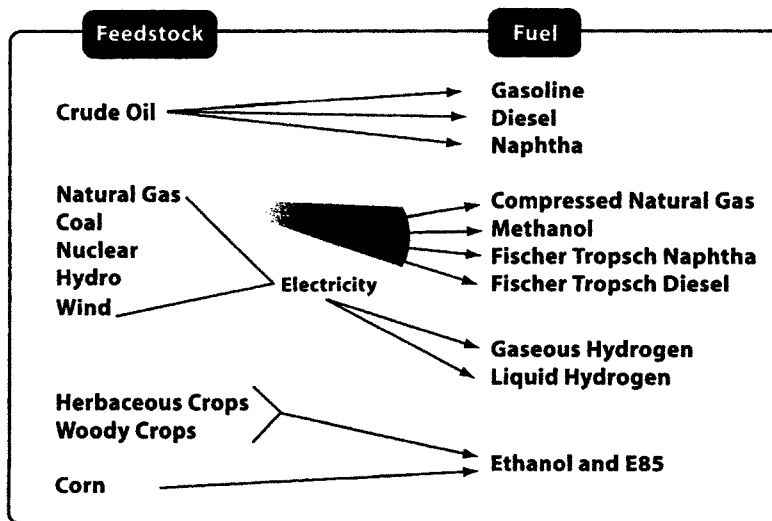


Figure 2-3 Energy Feedstocks and Fuels Examined in this Study

in large central plants. In total, 29 different fuel production pathways were analyzed in this study. These are listed in Table 2-1.

The WTT portion of the Phase 1 study included 75 WTT pathways. However, not all of these WTT pathways were used in the WTW integration. In fact, the 75 original WTT pathways were reduced to 13 for integration into the WTW analysis. In the Phase 2 study, on the other hand, all 27 WTT pathways were integrated into the WTW analyses. Pathways for which WTW integration analyses were added in the Phase 2 study include NG combined-cycle (CC) electricity to hydrogen via electrolysis and NA NG to CNG and hydrogen. During the Phase 1 study, WTW integration was not conducted on pathways involving NA NG because our analysis revealed that insufficient NA gas would be available to fuel a large share of the transportation fleet. Although we still recognize the resource limitations of NA NG, we included it in the Phase 2 WTW analysis to show the sensitivity of WTW results to the assumed location of the NG resource. In the GM Phase 1 report (GM et al. 2001), flowcharts for these fuel production

**Table 2-1 WTT Fuel Pathway Options Analyzed in Phase 2 Study**

Feedstock	Fuel
Petroleum	(1) 30-ppm-sulfur (S) reformulated gasoline (RFG) without oxygenate (for conventional spark-ignition [SI] engine)
	(2) 10-ppm-S RFG without oxygenate (for direct-injection SI engine)
	(3) 5-ppm-S gasoline (for gasoline-powered FCVs)
	(4) 15-ppm-S (low-sulfur [LS]) diesel
	(5) Crude naphtha
NA and NNA NG	(6) NA NG to CNG <sup>a</sup>
	(7) NNA NG to CNG via liquefied NG (LNG)
	(8) NNA NG to methanol
	(9) NNA NG to FT diesel
	(10) NNA NG to FT naphtha
	(11) NA NG to GH <sub>2</sub> in central plants <sup>a</sup>
	(12) NNA NG to GH <sub>2</sub> in central plants via LNG
	(13) NA NG to GH <sub>2</sub> in refueling stations <sup>a</sup>
	(14) NNA NG to GH <sub>2</sub> in refueling stations via LNG
	(15) NA NG to LH <sub>2</sub> in central plants <sup>a</sup>
	(16) NNA NG to LH <sub>2</sub> in central plants
	(17) NA NG to LH <sub>2</sub> in refueling stations <sup>a</sup>
	(18) NNA NG to LH <sub>2</sub> in refueling stations via LNG
Biomass	(19) Corn to ethanol for E85 blend (for ICEs)
	(20) Cellulosic biomass to ethanol for E85 blend (for ICEs)
	(21) Corn to ethanol (for FCVs)
	(22) Cellulosic biomass to ethanol (for FCVs)
Electricity to H <sub>2</sub>	(23) U.S. average electricity to GH <sub>2</sub> in refueling stations
	(24) U.S. average electricity to LH <sub>2</sub> in refueling stations
	(25) Calif. average electricity to GH <sub>2</sub> in refueling stations
	(26) Calif. average electricity to LH <sub>2</sub> in refueling stations
	(27) NG CC electricity to GH <sub>2</sub> in refueling stations <sup>a</sup>
	(28) NG CC electricity to LH <sub>2</sub> in refueling stations <sup>a</sup>
	(29) Renewable electricity to GH <sub>2</sub> in refueling stations <sup>a</sup>

<sup>a</sup> WTT analysis, but not WTW analysis, was conducted for these pathways in the GM North American Phase 1 study (GM et al. 2001).

pathways were presented. Key issues for each of the pathways covered in the Phase 2 study are presented below. Fuel properties assumed for this study are listed in Table 2-2.

### 2.1.2.1 Petroleum to Gasoline, Diesel, and Naphtha

The United States currently imports about 60% of its crude oil. Production of both domestic and foreign crude was taken into account in our study to determine petroleum recovery efficiencies, transportation modes, and distances from oil fields to U.S. refineries.

In the Phase 2 study, we include 30-ppm-sulfur (S) reformulated gasoline (RFG), 10-ppm-S RFG, 5-ppm-S gasoline, 15-ppm-S diesel, and naphtha. The three types of gasoline are assumed to contain no oxygenates. Requirements for 30-ppm-S gasoline began to be implemented nationwide in 2004. The 10-ppm-S RFG would probably be required if direct-injection spark-ignition (DI SI) engines are to be introduced in the U.S. so that they could meet the U.S. Environmental Protection Agency's (EPA's) Tier 2 NO<sub>x</sub> emission standards for light-duty vehicles. The 5-ppm-S gasoline is for FCVs to produce hydrogen from gasoline via onboard fuel processors. Even with 5-ppm-S gasoline, onboard desulfurization may be required for FCVs.

The 15-ppm-S diesel will be introduced in 2006 in the U.S. market to help heavy-duty diesel vehicles meet upcoming 2007 emissions standards. Naphtha is currently produced in petroleum refineries and used as a gasoline blending component. Because of its low octane number, pure naphtha can not be used for ICEs. However, naphtha could be used as an FCV fuel to produce hydrogen via onboard fuel processors. For that purpose, we assume a sulfur content below 10 ppm for naphtha.

**Table 2-2 Properties of Fuels Included in this Study**

Fuel	Lower Heating Value (Btu/gal)	Density (g/gal)	Carbon mass fraction (%)	Sulfur Content (ppm)	Carbon Content (g/mmBtu)
30-ppm-S gasoline	115,500	2,791	85.5	30	20,661
10-ppm-S gasoline	115,500	2,791	85.5	10	20,661
5-ppm-S gasoline	115,500	2,791	85.5	5	20,661
LS diesel	128,000	3,240	87.0	15	22,022
Petroleum naphtha	118,760	2,861	85.3	1	20,549
NG-based FT naphtha	111,780	2,651	84.2	0	19,969
FT diesel	118,800	2,915	86.0	0	21,102
Methanol	57,000	2,996	37.5	0	19,711
Ethanol	76,000	2,996	52.2	5	20,578
E85 (81% ethanol/19% gasoline by volume <sup>a</sup> )	83,505	2,957	58.2	10	20,609
Liquid hydrogen	30,900	268.7	00.0	0	0
Gaseous hydrogen <sup>b</sup>	288 <sup>c</sup>	2.545 <sup>d</sup>	00.0	0	0
Natural gas <sup>b</sup>	928 <sup>c</sup>	20.5 <sup>d</sup>	74.0	7	16,347

<sup>a</sup> Ethanol contains about 5% of gasoline as a denaturant. Thus, E85 actually contains 81% ethanol and 19% gasoline by volume.

<sup>b</sup> At normal atmospheric pressure.

<sup>c</sup> Btu per standard cubic foot.

<sup>d</sup> Grams per standard cubic foot.

Petroleum refining is the most important of the petroleum-based WTT stages. Past efforts at Argonne and during the GM North American Phase 1 study addressed the energy efficiencies associated with producing different petroleum products in great detail (see GM et al. 2001 and Wang et al. 2004). Because refineries produce multiple products (e.g., gasoline, diesel, naphtha), WTT analysis of a specific fuel requires the allocation of the overall refining efficiency among individual petroleum products. The Phase 1 report documented our approach to determining product efficiencies for each product (GM et al. 2001). Subsequently, we addressed allocation of petroleum refinery energy use among products at the level of individual refining processes (Wang et al. 2004). Our detailed allocation analysis showed that allocation at the aggregate refinery level, as was done in the Phase 1 study, is a good approximation of the detailed allocation. We retained the Phase 1 allocation results for use in the Phase 2 study.

#### **2.1.2.2 Natural Gas to Compressed Natural Gas**

For the CNG production pathway, we include two potential NG sources: North American and non-North American natural gas. In the Phase 1 report, we summarized the trend of NG production and consumption in the United States and concluded that the NG reserve in North America may not be able to support a large-scale transportation market in addition to expanding conventional NG markets (GM et al. 2001). For large-scale transportation fuel production from NG to be feasible, the United States may have to rely on NNA NG. Thus, in our Phase 1 and 2 analyses, we consider both NNA and NA NG. In order to ship it to the United States for CNG production at refueling stations, NNA NG needs to be liquefied. Liquefaction of NG introduces an energy efficiency loss of about 10%.

We assumed that NG would be compressed to 4,000 psi for storage at 3,600 psi aboard CNG vehicles. Energy requirements for CNG compression were calculated by using a formula discussed in the Phase 1 report (GM et al. 2001). We did not consider CNG at pressures higher than 3,600 psi because the increase in NG density as pressure increases beyond 3,600 psi diminished due to the nonlinear compressibility of NG. We assumed electric compressors would be used at CNG refueling stations, because of their high reliability relative to gas compressors. Electric compressors are more efficient than gas compressors if one considers only the energy in electricity (vs. energy in NG for gas compressors). However, because GREET takes into account the energy loss for electricity generation, the overall efficiency of electric compressors, with consideration of electric power plant efficiency losses, could be lower than that of gas compressors.

#### **2.1.2.3 Natural Gas to Methanol**

Methanol is produced primarily from NG via steam methane reforming (SMR) or autothermal reforming (ATR). As of 2001, worldwide methanol production capacity was 11.8 billion gal/yr; of that total, South America accounts for 22%, the Middle East and Africa 22%, the Asian Pacific 21%, Europe 19%, and North America 16% (American Methanol Institute 2003). Mega-size methanol plants, especially newly built ones, are located in non-North American countries that have a plentiful (and therefore inexpensive) supply of natural gas. If a significant amount of methanol is to be used to power FCVs in the United States, it is likely that the methanol will be produced outside of North America. So only imported methanol was considered in the Phase 2 study. The Phase 1 study included methanol produced both in and outside of North America.

We assumed that methanol would be produced in South America, the Middle East, and Africa and shipped to North America via ocean tankers. Once imported, we assumed that methanol would be distributed to bulk terminals and refueling stations via rail, barge, and truck.

#### 2.1.2.4 Natural Gas to Fischer-Tropsch Diesel and Fischer-Tropsch Naphtha

Although FT diesel can be produced from a variety of feedstocks, including NG, coal, and biomass, the current commercial interest involves FT diesel production from NG. Shell has announced plans for large-size NG-based FT plants in Australia, South Africa, and the Middle East. SasolChevron has announced plans for these types of plants in Nigeria and Qatar. Diesel fuel produced from NG via the FT process has low aromatics, extremely low sulfur content, and a high cetane number. It is a premium fuel for CI engines. We included FT diesel for CI engine technologies.

In FT plants, naphtha is produced together with FT diesel. The volumetric share of FT naphtha could be 20–30% of FT plant production. FT naphtha, with almost zero sulfur content and relatively high hydrogen content, could be a source for hydrogen production (via fuel processors) onboard FCVs.

Natural gas feedstock cost is a major cost component of FT plant economics. Because of this, all the NG-based FT plants announced for construction are to be located in countries where NG is abundant and cheap. In the Phase 2 study, we assumed that FT diesel and naphtha would be produced in the Middle East and North Africa, and shipped to North America via ocean tankers.

#### 2.1.2.5 Natural Gas to Gaseous and Liquid Hydrogen

Hydrogen is currently produced primarily from NG via SMR. For the purpose of completeness, we included both NA and NNA NG for hydrogen production, even though NA NG could be limited for large-scale hydrogen production. We included both  $\text{GH}_2$  and  $\text{LH}_2$  in our evaluation. Although other hydrogen storage technologies, such as metal hydrides, are being researched and developed, we do not include these because insufficient data were available to characterize system mass and energy required to release hydrogen. We assumed that  $\text{GH}_2$  would be compressed to 6,000 psi at refueling stations for onboard storage at 5,000 psi. For  $\text{LH}_2$ , we assumed that the hydrogen would be liquefied at the site where it is produced. While hydrogen is currently produced from NG at central production facilities, we included both central plant production and refueling station production. The latter can avoid or reduce the need for building an expensive hydrogen transportation and distribution infrastructure.

##### 2.1.2.5.1 Gaseous Hydrogen

For  $\text{GH}_2$  production, we included four pathways: central plants with NA NG, refueling stations with NA NG, central plants with NNA NG, and refueling stations with NNA NG. Although tanks for storage of hydrogen at 10,000 psi are being developed, we did not include this option in our analysis. Increasing compression pressure from 5,000 to 10,000 psi would result in the following increases in total energy use for  $\text{GH}_2$ -powered FCVs: a 17% increase in energy use for compressing hydrogen; a 5% increase in WTT energy use, and a 2% increase in WTW energy use. Thus, the effect of 10,000 psi vs. 5,000 psi on energy use and resultant emissions is small on a WTW basis. For the first pathway,  $\text{GH}_2$  production in central plants with NA NG, the NG is transmitted via pipelines from NG processing plants to hydrogen plants.  $\text{GH}_2$  is then transmitted via pipelines from hydrogen plants to refueling stations, where  $\text{GH}_2$  is compressed for refueling hydrogen ICE and FC vehicles. For the pathway of hydrogen production at refueling stations from NA NG, the NG is transmitted from NG processing plants to refueling stations via pipeline.

The third and fourth pathways, producing  $\text{GH}_2$  in both central plants and refueling stations with NNA NG, the NNA NG is liquefied offshore near NG fields. LNG is then transported via ocean tankers to U.S. LNG terminals, where it is gasified. In the case of central plant production, NG is transmitted to central

hydrogen plants via pipelines. The produced GH<sub>2</sub> is then transported via pipelines to refueling stations, where it is compressed to 6,000 psi. For GH<sub>2</sub> production from NNA NG at refueling stations, NG is transported via pipelines to refueling stations. Although both NG and electric compressors can be used for compressing GH<sub>2</sub>, we assumed in our study that electric compressors would be used. Energy requirements for compressing GH<sub>2</sub> are estimated with a formula presented in the Phase 1 report (GM et al. 2001).

#### **2.1.2.5.2 Liquid Hydrogen**

For LH<sub>2</sub>, we included four production pathways: central plants with NA NG, refueling stations with NA NG, central plants with NNA NG, and refueling stations with NNA NG. For the first pathway, central plant LH<sub>2</sub> production with NA NG, the NG is transported from NG processing plants to hydrogen plants, where hydrogen is produced and liquefied. The LH<sub>2</sub> is then transported to refueling stations primarily via rail and trucks. For the second pathway, station LH<sub>2</sub> produced with NA NG, the NG is transmitted from NG processing plants to refueling stations via pipelines, where hydrogen is produced and liquefied.

The third pathway, central plant LH<sub>2</sub> production with NNA NG, involves production of LH<sub>2</sub> offshore and transportation to U.S. ports via ocean tankers. The LH<sub>2</sub> is then transported to refueling stations via rail and trucks. For the last pathway, refueling station LH<sub>2</sub> production with NNA NG, the NG is liquefied offshore and transported to U.S. LNG terminals via ocean tankers. The LNG is then gasified and transmitted to refueling stations via pipelines. Hydrogen is produced and liquefied in refueling stations.

NG-based hydrogen plants convert the carbon in NG into CO<sub>2</sub>. The generated CO<sub>2</sub> in hydrogen plants could be captured and sequestered for further CO<sub>2</sub> reductions by hydrogen ICE vehicles and FCVs, if there were incentives to do so. However, CO<sub>2</sub> capture and sequestration were not considered in our analysis.

#### **2.1.2.6 Electricity to Gaseous and Liquid Hydrogen via Electrolysis of Water**

Hydrogen can be produced from electricity by electrolyzing water. Because a large amount of electricity is required for hydrogen production, this production option is only economically feasible where electricity is cheap. On the other hand, the distribution and production infrastructure for hydrogen production via central SMR is expensive and could take a long time to establish. Because commercial electrolyzers and an extensive electricity distribution system are already available, electrolysis hydrogen was included in our analysis as an option during the early stage of hydrogen vehicle introduction into the marketplace.

Energy and emission impacts of electrolysis hydrogen depend very much on the energy source from which electricity is generated. Our analysis included hydrogen from U.S. average electricity, electricity from NG-powered combined-cycle (NGCC) turbines, and electricity from renewable sources such as hydro-power, wind, and other energy sources. In the past 20 years, most new fossil fuel power plants have been efficient, low-polluting NGCC turbines, although because of recent NG price spikes, construction of many coal-fired power plants is planned in the near future. Renewable electricity could provide large fossil energy and emissions benefits. These three sources for electricity generation provide a range of results that cover the effects of potential electricity supply sources for hydrogen production.

#### **2.1.2.7 Biomass to Ethanol**

Ethanol can be produced through fermentation of sugars derived from corn or cellulosic biomass. In 2003, the United States consumed nearly 3 billion gallons of fuel ethanol for transportation use. About 90% of



the ethanol is produced from corn. Although essentially no ethanol is currently produced from cellulose, research and development (R&D) is under way to develop and improve the technologies required to produce ethanol from cellulosic biomass. Because of the limited supply of corn, ethanol produced from corn cannot meet a large enough fraction of the transportation fuel demand. For example, the current 3 billion gallons of ethanol production in the United States already consumes about 11% of total U.S. corn production — 10.1 billion bushels in 2003 — accounting for only about 1.4% of the total U.S. gasoline demand of 142 billion gallons (on an energy basis). Corn-based ethanol is produced in both wet and dry milling ethanol plants. Wet milling plants are larger and require more capital investment to build than dry milling plants. Wet milling plants produce multiple co-products besides ethanol, while dry milling plants produce a single co-product — animal feed. In recent years, newly added U.S. ethanol production capacity has been in the form of dry milling plants because of their low capital requirements and short period of construction. As a result, in 2004, about 75% of total U.S. corn ethanol was produced from dry milling plants. In our simulations of corn ethanol for year 2016, we assume that 70% of corn ethanol is produced from dry milling plants and the remaining 30% from wet milling plants. That is, we assume that in the future, large-size wet milling ethanol plants will be added to the U.S. corn ethanol production capacity.

In the long run, cellulosic biomass, such as crop residues and managed biomass growth (e.g., switchgrass and fast-growing trees), can provide a large amount of feedstock for ethanol production. We included ethanol production from both corn and cellulosic biomass in our study. We assumed that cellulosic biomass for ethanol production was 50% from herbaceous (grasses) and 50% from woody sources.

Processes analyzed for ethanol production pathways included manufacture of fertilizers and pesticides, transportation of fertilizers and pesticides to farms, farming activities, transportation of corn (in the case of corn ethanol) and cellulosic biomass (in the case of cellulosic ethanol) to ethanol plants, ethanol production in corn or cellulosic ethanol plants, and ethanol transportation and distribution to refueling stations.

### **2.1.3 Fuel Production Assumptions**

#### **2.1.3.1 Assumptions Related to Energy and GHG Emissions**

Table 2-3 lists the assumptions used for WTT energy efficiency and GHG emissions. These assumptions are discussed extensively in the Phase 1 study report (GM et al. 2001). For WTT stages, there are two major CO<sub>2</sub> emission sources: combustion of process fuels and direct emissions from production or conversion processes (such as the SMR process for hydrogen production). CO<sub>2</sub> emissions from process fuel combustion are calculated by using the carbon balance approach. That is, the carbon contained in a process fuel combusted minus the carbon in emissions of VOCs, CO, and CH<sub>4</sub> equals the carbon in CO<sub>2</sub> emissions of the combustion. Furthermore, in GREET, the CO<sub>2</sub> formation from oxidation of VOCs and CO is taken into account in CO<sub>2</sub> emissions from a given process, because VOCs and CO reside in the air for fewer than 10 days.

Emissions of CH<sub>4</sub> and N<sub>2</sub>O from a combustion process are determined by emission factors, in g/mmBtu of fuel combusted, based primarily on EPA's AP-42 report (EPA 1995). During the Phase 2 study, detailed emissions data for VOCs, CO, NO<sub>x</sub>, PM<sub>10</sub>, and SO<sub>x</sub> were obtained from EPA's emissions inventory data (as discussed in a later section) for developing the distribution functions of emission factors for these pollutants. Emission factors for CH<sub>4</sub> and N<sub>2</sub>O in Phase 2 simulations still rely on

Table 2-3 Key Parametric Assumptions for WTT Energy Efficiencies and GHG Emissions

Pathway	Distribution Function Type	P20 <sup>a</sup>	P50 <sup>a</sup>	P80 <sup>a</sup>
<b>Petroleum Pathways</b>				
Petroleum recovery efficiency	Triangular <sup>b</sup>	96.0%	98.0%	99.0%
CH <sub>4</sub> emissions during crude recovery: g/mmBtu <sup>c</sup>			81.757	
Petroleum refining efficiency: 5- to 30-ppm-S gasoline without oxygenate	Normal	83.0%	84.5%	86.0%
Petroleum refining efficiency: 15-ppm-S diesel	Normal	85.0%	87.0%	89.0%
Petroleum refining efficiency: 5-ppm-S naphtha	Normal	89.0%	91.0%	93.0%
Gasoline production CO <sub>2</sub> emissions: g/mmBtu <sup>d</sup>			1,253	
<b>NG Pathways</b>				
NG recovery efficiency	Normal <sup>e</sup>	96.0%	97.5%	99.0%
NG processing efficiency	Normal <sup>e</sup>	96.0%	97.5%	99.0%
NG liquefaction efficiency (for NNA NG transported to North America)	Triangular <sup>b</sup>	87.0%	91.0%	93.0%
NG compression efficiency with electric compressors <sup>f</sup>	Triangular <sup>b</sup>	96.0%	97.0%	98.0%
Methanol plant efficiency <sup>g</sup>	Triangular <sup>b</sup>	65.0%	67.5%	71.0%
FT plant efficiency <sup>g</sup> : for FT diesel and naphtha production	Normal	61.0%	63.0%	65.0%
H <sub>2</sub> central plant efficiency <sup>g</sup> : GH <sub>2</sub> production	Normal	68.0%	71.5%	75.0%
H <sub>2</sub> station efficiency <sup>g</sup> : GH <sub>2</sub> production	Normal	62.0%	67.0%	72.0%
H <sub>2</sub> central plant efficiency: liquefaction of GH <sub>2</sub>	Triangular <sup>b</sup>	65.0%	71.0%	77.0%
H <sub>2</sub> station efficiency: liquefaction of GH <sub>2</sub>	Normal	60.0%	66.0%	72.0%
GH <sub>2</sub> compression efficiency <sup>h</sup> : sent via pipeline to stations from central plant	Triangular <sup>b</sup>	90.0%	92.5%	95.0%
GH <sub>2</sub> compression efficiency <sup>h</sup> : GH <sub>2</sub> produced at stations	Triangular <sup>b</sup>	91.5%	94.0%	96.5%
CH <sub>4</sub> emissions during NG recovery and processing: g/mmBtu			106.063	
CH <sub>4</sub> emissions during NG transmission to central plants: g/mmBtu			81.161	
CH <sub>4</sub> emissions during NG transmission to stations: g/mmBtu			122.581	
CH <sub>4</sub> emissions from LNG boil-off after recovery: g/mmBtu			48.0	
FT plant carbon conversion efficiency			80%	
<b>Electricity to Hydrogen Pathways</b>				
NG-fired boiler electric power plant efficiency <sup>i</sup>	Normal	32.0%	35.0%	38.0%
NG-fired CC electric power plant efficiency <sup>j</sup>	Triangular <sup>b</sup>	50.0%	55.0%	60.0%
Coal-fired boiler electric power plant efficiency <sup>k</sup>	Normal	33.0%	35.5%	38.0%
Coal-fired advanced boiler electric power plant efficiency <sup>l</sup>	Normal	38.0%	41.5%	45.0%
Electrolysis efficiency: GH <sub>2</sub> from electricity in station	Normal	67.0%	71.5%	76.0%
GH <sub>2</sub> compression efficiency <sup>h</sup> : GH <sub>2</sub> produced at stations	Triangular <sup>b</sup>	91.5%	94.0%	96.5%
H <sub>2</sub> station efficiency: liquefaction of GH <sub>2</sub>	Normal	60.0%	66.0%	72.0%

Table 2-3 (Cont.)

Pathway	Distribution Function Type	P20 <sup>a</sup>	P50 <sup>a</sup>	P80 <sup>a</sup>
<b>Biomass to Ethanol Pathways</b>				
Corn farm energy use: Btu/bushel of corn	Weibull	20,895	23,288	27,735
Woody biomass farm energy use: Btu/dry ton	Normal	176,080	234,770	293,460
Herbaceous biomass farm energy use: Btu/dry ton	Normal	162,920	217,230	271,540
Corn farm nitrogen (N) fertilizer use: g/bushel	Weibull	370	470	545
Woody biomass farm N fertilizer use: g/dry ton	Normal	532	709	886
Herbaceous biomass farm N fertilizer use: g/dry ton	Normal	7,980	10,635	13,290
N in N <sub>2</sub> O from N in fertilizer: corn farms	Triangular <sup>b</sup>	1.0%	2.0%	3.0%
N in N <sub>2</sub> O from N in fertilizer: cellulosic biomass farms	Triangular <sup>b</sup>	1.0%	1.5%	2.0%
Soil CO <sub>2</sub> emissions from cornfields: g/bushel of corn	Triangular <sup>b</sup>	0	195	390
Soil CO <sub>2</sub> sequestration of tree farms: g/dry ton of biomass	Triangular <sup>b</sup>	-225,000	-112,500	0
Soil CO <sub>2</sub> sequestration of grass farms: g/dry ton of biomass	Triangular <sup>b</sup>	-97,000	-48,500	0
Corn ethanol plant ethanol yield – dry mill: gal/bushel	Triangular <sup>b</sup>	2.5	2.65	2.8
Corn ethanol plant ethanol yield – wet mill: gal/bushel	Triangular <sup>b</sup>	2.4	2.55	2.7
Corn ethanol plant energy use – dry mill: Btu/gal	Normal	32,101	36,120	40,139
Corn ethanol plant energy use – wet mill: Btu/gal	Normal	42,043	45,950	49,857
Woody cellulosic ethanol plant ethanol yield: gal/dry ton	Normal	76	87	98
Herbaceous cellulosic ethanol plant ethanol yield: gal/dry ton	Normal	80	92	103
Woody cellulosic ethanol plant electricity production <sup>m</sup> : kWh/gal	Triangular <sup>b</sup>	-1.73	-1.145	-0.560
Herbaceous cellulosic ethanol plant electricity production <sup>m</sup> : kWh/gal	Triangular <sup>b</sup>	-0.865	-0.572	-0.280

<sup>a</sup> Here, P20 values mean that there is a probability of 20% that actual values would be equal to or below the P20 values; P50 values mean that there is a probability of 50% that actual values would be equal to or below the P50 values; and P80 values mean that there is a probability of 80% that actual values would be equal to or below the P80 values.

<sup>b</sup> These values are for the minimum, the most likely, and the maximum values for the triangular distribution function.

<sup>c</sup> CH<sub>4</sub> emissions from crude oil processing in oil fields and associated gas venting during crude recovery. No distribution function was established for this parameter.

<sup>d</sup> CO<sub>2</sub> emissions from processes other than fuel combustion in petroleum refineries. The value here is for gasoline production. Emissions generated during production of other fuels (such as diesel and naphtha) are estimated by using the gasoline value and relative refining intensity between gasoline and each of the other fuels.

<sup>e</sup> For these distributions, the maximum value was set at 100%.

<sup>f</sup> The efficiency for electric compressors is calculated based on Btu of input electricity. Energy loss for electricity generation is taken into account by GREET during electricity generation.

<sup>g</sup> Efficiencies here are for plant designs without steam or electricity co-generation.

<sup>h</sup> Electric compressors are assumed for GH<sub>2</sub> compression. Efficiencies, defined previously (GM et al. 2001), are calculated based on Btu of input electricity. Energy loss of electricity generation is taken into account by GREET during electricity generation.

<sup>i</sup> We assume that NG-fired boiler electric power plants generate 10.5% of total U.S. electricity.

<sup>j</sup> We assume that NG-fired CC electric power plants generate 4.5% of total U.S. electricity.

<sup>k</sup> We assume that coal-fired boiler electric power plants generate 43% of total U.S. electricity.

<sup>l</sup> We assume that coal-fired advanced boiler electric power plants generate 10.8 % of total U.S. electricity.

<sup>m</sup> The amount of electricity co-generated in cellulosic ethanol plants for export. The negative values here mean export of electricity from ethanol plants.

point-based emissions factors from AP-42. That is, the potential uncertainties in CH<sub>4</sub> and N<sub>2</sub>O emissions from fuel combustion were not taken into account in either the Phase 1 or Phase 2 simulations because of data limitation.

This section presents key parametric assumptions for WTT energy efficiencies and GHG emissions used in the Phase 2 study. In many cases, energy efficiency and GHG emission assumptions are the same for both the Phase 1 and Phase 2 studies.

### 2.1.3.2 Assumptions Related to Criteria Pollutant Emissions

#### 2.1.3.2.1 GREET Simulation Approach for Criteria Pollutant Emissions

This section discusses the general approach and issues in estimating WTT criteria pollutant emissions using GREET. To estimate WTT energy use and emissions for a given fuel production pathway, GREET first estimates energy use (in Btu) and emissions (in g) per million Btu of fuel throughput for a given WTT activity, such as petroleum refining and hydrogen production. The model then combines the energy use and emissions from all WTT activities associated with a fuel production pathway to estimate total WTT energy use and emissions for a million Btu of the fuel available at the pump of a refueling station.

For a given WTT activity, energy input per unit of energy product output is calculated in GREET from the energy efficiency of the activity. By definition, energy efficiency is the energy output divided by the energy input (including energy in both process fuels and energy feedstock). Thus, total energy input for a unit of energy output for a WTT activity is calculated by the following:

$$\text{Energy}_{\text{in}} = 1/\text{efficiency},$$

where

Energy<sub>in</sub> = Energy input of a given stage (say, in Btu per Btu of energy product output from the activity), and

Efficiency = Energy efficiency for the given activity (defined as [energy output]/[energy input] for the activity).

Energy efficiencies of WTT activities for various fuel production pathways were addressed in the Phase 1 WTW report (GM et al. 2001). The energy efficiency results of these prior efforts, presented in Table 2-3, were used in the Phase 2 study.

The above equation calculates total energy input required for a given activity. The total energy input could comprise the Btus in energy feedstock and process fuels. In most cases, energy feedstock includes both a feed for production of a fuel and a process fuel involved in combustion during a given activity. To calculate emissions, total feedstock input needs to be separated into feed and fuel, as described in Wang (1999a). Converting feed to a given fuel (which, in most cases, is a chemical process) may produce emissions. Combustion of a feedstock as a fuel, as well as combustion of other process fuels, certainly produces emissions. The combustion emissions are estimated in GREET by using the amount of fuels burned and the combustion emission factors for given fuels with given combustion technologies.

Combustion of different process fuels can have very different emission profiles. GREET includes process fuels such as NG, residual oil, diesel, gasoline, crude oil, liquefied petroleum gas (LPG), coal, electricity, and biomass. Different activities could involve very different shares of these process fuels. For example,

corn ethanol plants are powered primarily by NG and coal; petroleum refineries by NG, refinery gas, and electricity; NG SMR hydrogen plants by NG. GREET specifies shares of process fuels for individual WTT activities based primarily on statistical data and data available from open literature.

Emissions of VOCs, CO, NO<sub>x</sub>, PM<sub>10</sub>, SO<sub>x</sub>, CH<sub>4</sub>, N<sub>2</sub>O, and CO<sub>2</sub> for a particular WTT activity are calculated in g/10<sup>6</sup> (million) Btu of fuel throughput from that activity. Emissions occurring during an individual activity include those resulting from the combustion of process fuels and from non-combustion processes such as chemical reactions and fuel leakage and evaporation. The latter emission sources are fuel-specific and activity-specific; they are discussed later in this section. Emissions from combustion of process fuels for a particular activity are calculated by using the following formula:

$$EM_{cm,i} = \left( \sum_j \sum_k EF_{i,j,k} \times [FC_{j,k} \div 1,000,000] \right)$$

where

- EM<sub>cm,i</sub> = Combustion emissions of pollutant i in g/10<sup>6</sup> Btu of *fuel throughput*,
- EF<sub>i,j,k</sub> = Emission factor of pollutant i for process fuel j with combustion technology k (g/10<sup>6</sup> Btu of *fuel burned*), and
- FC<sub>j,k</sub> = Consumption of process fuel j with combustion technology k (Btu/10<sup>6</sup> Btu of fuel throughput).

FC<sub>j,k</sub> for a given activity is, in turn, calculated by using the following formula:

$$FC_{j,k} = FC \times Share_{fuelj} \times Share_{techk,j} ,$$

where

- FC = Total process fuel consumption for the given activity (in Btu/10<sup>6</sup> Btu of fuel throughput, calculated with energy efficiencies and separation between feeds and fuels for feedstocks, see above discussion),
- Share<sub>fuelj</sub> = Share of process fuel j out of all process fuels consumed during the activity ( $\sum_j \text{fuel}_j = 1$ ), and
- Share<sub>techk,j</sub> = Share of combustion technology k out of all combustion technologies for fuel j ( $\sum_k \text{tech}_{k,j} = 1$ ).

Emission factors (EF<sub>i,j,k</sub>) are a key component in determining WTT criteria pollutant emissions. Stationary emission regulations by EPA and by state and local air regulatory agencies dictate emission factors for given combustion technologies and given emission sources. Emission factors for VOCs, CO, NO<sub>x</sub>, PM<sub>10</sub>, CH<sub>4</sub>, and N<sub>2</sub>O for different combustion technologies fueled by different process fuels in previous GREET versions were derived primarily from EPA's AP-42 document (EPA 1995). Through the Phase 2 study, a significant amount of effort was spent to update emission factors in GREET (these efforts are discussed in later sections).

In the GREET model, SO<sub>x</sub> emission factors for combustion technologies fueled with all fuels except coal, crude oil, and residual oil are calculated by assuming that all sulfur contained in these process fuels is converted into sulfur dioxide (SO<sub>2</sub>). The following formula is used to calculate the SO<sub>x</sub> emissions for the combustion technologies:

$$SO_{x,j} = \text{Density}_j \div \text{LHV}_j \times 1,000,000 \times S\_ratio_j \times 64 \div 32,$$

where

- $SO_{x,j}$  =  $SO_x$  (in  $SO_2$ ) emission factor for combustion of process fuel j (in  $g/10^6$  Btu of fuel j burned),  
 $\text{Density}_j$  = Density of process fuel j (in g/gal for liquid fuels, g/SCF [standard cubic foot] for gaseous fuels such as NG [density for solid fuels such as coal and biomass is not needed]),  
 $\text{LHV}_j$  = Low heating value of process fuel j (in Btu/gal for liquid fuels, Btu/SCF for gaseous fuels, or Btu/ton for solid fuels),  
 $S\_ratio_j$  = Sulfur ratio by weight for process fuel j,  
 64 = Molecular weight of  $SO_2$ , and  
 32 = Molecular weight of elemental sulfur.

As this formula implies,  $SO_x$  emission factors for fuel combustion are determined by the sulfur content of the burned fuels and not by combustion technologies. However, uncontrolled  $SO_x$  emission factors associated with combustion of residual oil, crude oil, and coal are very high — they all exceed emission standards. Desulfurization measures have to be employed for combustion technologies powered by these fuels to reduce  $SO_x$  emissions to acceptable levels. For these cases,  $SO_x$  emission factors for various combustion technologies are derived by using a method similar to that used to identify the emission factors of other criteria pollutants.

There are some exceptions to using the formula provided above to calculate  $SO_x$  emissions. Some chemical conversions of feedstocks to fuels require catalysts; these conversions include production of methanol, hydrogen, and FT diesel from NG in plants and production of hydrogen from gasoline, methanol, and ethanol onboard FCVs by means of fuel processors. In these cases, sulfur contained in a feedstock can poison catalysts and must be removed from the feedstock before it enters the fuel production units. Desulfurization of feedstocks usually produces solid wastes that contain immobilized sulfur. In these cases, the sulfur contained in the feedstocks becomes solid waste; it is not released as air emissions. No  $SO_x$  air emissions are assigned for these cases.

In GREET, combustion  $CO_2$  emission factors (in g/mmBtu of fuel throughput) are calculated by using a carbon balance approach, in which the carbon contained in a process fuel burned minus the carbon contained in combustion emissions of VOCs, CO, and  $CH_4$  is assumed to convert to  $CO_2$ . The following formula is used to calculate  $CO_2$  emissions:

$$CO_{2,j,k} = [\text{Density}_j \div \text{LHV}_j \times 1,000,000 \times C\_ratio_j - (\text{VOC}_{j,k} \times 0.85 + CO_{j,k} \times 0.43 + CH_{4,j,k} \times 0.75)] \times 44 \div 12,$$

where

- $CO_{2,j,k}$  = Combustion  $CO_2$  emission factor for combustion technology k burning process fuel j (in g/mmBtu of fuel j burned),  
 $\text{Density}_j$  = Density of process fuel j (in g/gal for liquid fuels, g/SCF for gaseous fuels [density for solid fuels is not needed]),  
 $\text{LHV}_j$  = Low heating value of process fuel j (in Btu/gal for liquid fuels, Btu/SCF for gaseous, or Btu/ton for solid fuels),  
 $C\_ratio_j$  = Carbon ratio by weight for process fuel j,

- $VOC_{j,k}$  = VOC emission factor for combustion technology k burning process fuel j (in g/mmBtu of fuel j burned),  
 0.85 = Estimated average carbon ratio by weight for VOC combustion emissions,  
 $CO_{j,k}$  = CO emission factor for combustion technology k burning process fuel j (in g/mmBtu of fuel j burned),  
 0.43 = Carbon ratio by weight for CO,  
 $CH_{4,j,k}$  = CH<sub>4</sub> emission factor for combustion technology k burning process fuel j (in g/mmBtu of fuel j burned),  
 0.75 = Carbon ratio by weight for CH<sub>4</sub>,  
 44 = Molecular weight of CO<sub>2</sub>, and  
 12 = Molecular weight of elemental carbon.

The above formula shows that combustion CO<sub>2</sub> emissions do not include carbon contained in VOCs, CO, and CH<sub>4</sub> emissions. On the other hand, VOCs and CO reside in the atmosphere for fewer than 10 days before they are oxidized into CO<sub>2</sub>. In GREET, the indirect CO<sub>2</sub> emissions from VOC and CO oxidation in the atmosphere are considered in total CO<sub>2</sub> emission calculations.

Besides emissions from combustion of process fuels, emissions are also caused by non-combustion chemical and physical processes. GREET takes these non-combustion, or process-related, emission sources into account. Such emission sources include VOC evaporative emissions and emissions from fuel spillage during transportation and storage of volatile liquid fuels, fuel leakage of gaseous fuels, emissions from flaring and venting of associated gas in oil fields, refining-process-related emissions in petroleum refineries, and emissions from SMR in hydrogen and other chemical plants. These emission sources are considered for individual non-combustion processes as needed; they are discussed in later sections.

Energy use and consequent CO<sub>2</sub> emissions from WTT activities are not regulated in the United States. The performance of individual facilities with respect to these two factors may be determined primarily by economic tradeoffs between the costs of technologies and the benefits of their fuel savings. Emissions of criteria pollutants in major facilities — such as petroleum refineries and electric power plants — and by major combustion technologies, on the other hand, are strictly regulated. This is especially true for those facilities located in air quality standard non-attainment areas.

A major challenge we faced in completing the Phase 2 study was addressing the complexity of criteria pollutant emissions associated with WTT activities with respect to geographic locations and over time. This study was intended to analyze cases representing the United States as a whole. During our study, we investigated emissions from facilities located in attainment areas, California non-attainment areas, and non-attainment areas in the rest of the United States to cover geographic variations and uncertainties. Although some of the fuel pathways included in this study involve production facilities outside of North America (such as NNA NG-based LH<sub>2</sub> and NNA NG-based FT diesel), we assumed that these facilities would have emission profiles similar to those of the facilities located in North America. Although this assumption is crude, its effects on urban emissions of criteria pollutants are minimal (see discussion of urban emissions on the following page).

In order to better understand the trends and uncertainties associated with criteria pollutant emissions over time, we decided to investigate historical trends in criteria pollutant emissions between 1990 and 2000 to provide hints for future trends — from 2000 to 2016 (the latter is the target year for this analysis).

In this study, both spatial and temporal variations and uncertainties in criteria pollutant emissions were addressed through investigating, in great detail, the National Emissions Inventory (NEI) database maintained by EPA.

While the effects of GHG emissions are global, those of criteria pollutants are primarily focused on local populations. Thus, human exposure to criteria air pollution needs to be taken into account. This is especially important for WTW analyses of criteria pollutant emissions because such analyses usually add emissions in different locations together. To address this issue, GREET is designed to separate emissions of criteria pollutants into total emissions and urban emissions (the latter is a subset of the former). Total emissions are the sum of emissions occurring everywhere during a WTW chain. Urban emissions are those only occurring within U.S. urban areas. Urban areas here are defined by the U.S. Bureau of the Census as cities having populations greater than 125,000. Our estimates of urban emissions for individual facilities are based on their locations. For existing facilities — such as petroleum refineries and electric power plants — the share of urban and non-urban facilities (by capacity) is based on the locations of existing facilities, which we collected from the Energy Information Administration (EIA) and industry databases. For new facilities — such as plants constructed to produce hydrogen as a transportation fuel — the share is determined based on the specification of a given hydrogen production pathway (e.g., central plants vs. refueling stations), the split of urban vehicles and non-urban vehicles, and their vehicle miles traveled (VMT).

The separation of criteria pollutant emissions into total and urban emissions is an important first step to address potential human exposure, as well as the total amount of emissions from a particular fuel pathway. However, this approach is not a precise way to address the human health effects associated with these pollutants. To do so precisely, researchers need to estimate emissions by geographic location, conduct simulations of air quality and human exposure, and assess the human health effects of such exposure. These tasks are far beyond the scope of the WTW analysis conducted for this study.

#### ***2.1.3.2.2 Development of Criteria Pollutant Emission Factors***

##### ***I. The National Emissions Inventory***

Previous versions of the GREET model employed criteria pollutant emission factors primarily from EPA's AP-42 documents (EPA 1995). In addition to AP-42, however, EPA maintains the NEI database (EPA 1999), which consists of emissions inventory information for point sources collected from state and local air agencies. Data in this inventory are commonly used for air quality monitoring and human exposure modeling. Commercial enterprises are required to report emissions inventory information to these state and local agencies, and this information is then reported to EPA and input into the NEI. In many cases, the commercial enterprises may use emission factors from AP-42 to estimate emissions from their facilities. However, if they believe their emissions are different from those provided in AP-42, they report the actual emissions, particularly if they are subject to continuous emissions monitoring (CEM) requirements. Because the NEI appears to be the most complete listing of point source emissions, it was used to update the emission factors in GREET for all sources except utilities. As discussed in the section below, utility emission factors were based primarily on recent EPA analyses and projections in the EPA Interstate Air Quality Rule (EPA 2004a).

Air Improvement Resource, Inc. (AIR) contracted with Eastern Research Group (ERG) to analyze emissions inventory information in the NEI in order to derive emission factors for combustion processes and major facilities. Following ERG's analysis of the emission factors, AIR used these data to create distributions of point source emissions for GREET. ERG's analysis of the NEI database and other



databases necessary to estimate emission factors is discussed in the following sections. AIR's analyses of these data are also discussed in a later section.

The retrospective emissions data obtained in this analysis were not used directly in our study. Instead they were one of several inputs used to project emissions factor distributions for 2016.

The draft 1999 NEI database for criteria pollutants from point sources was used for this analysis. These NEI data files represent emissions and activity data from 1999. Some data elements, including process-level emissions and facility locations, are required when submitting data to the NEI. However, other data elements, like standard industrial classification (SIC), activity data (e.g., fuel throughput), and emission factors (in mass per fuel throughput), are not required. In order to estimate emission factors using data contained in the NEI, both process-level emissions and activity data were needed for each source. In some cases, the lack of activity data limited the amount of emissions data that could be used to estimate emission factors. In other cases, if possible, we used activity data for facilities of interest from other sources (journals and web sites) to supplement the NEI data.

## II. Extraction and Refinement of Emissions Data in the NEI

Several steps were performed to extract emissions data from EPA's NEI. Figure 2-4 provides a generalized flowchart of these steps. As a first step, industries relating to transportation fuels were

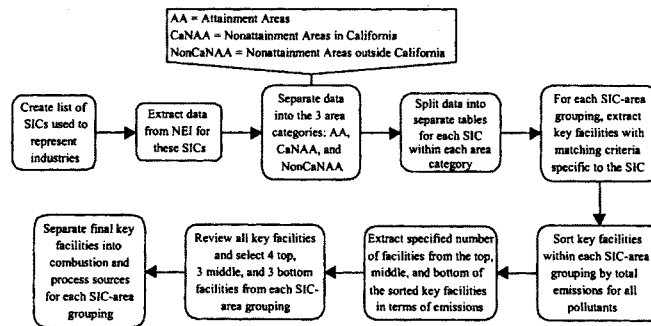


Figure 2-4 Steps Performed in the Extraction and Refinement of Emissions Data

assigned an SIC that represented the primary activities of the industry. We compiled a list of these assigned SICs. Facilities containing a primary SIC that matched one of the SICs in the list were extracted from the NEI database. Data from roughly 13,000 facilities were originally extracted from the NEI database, representing 40 SICs.

Data from the collection of SICs were then divided by area category. The three area categories are: attainment areas (AA), nonattainment areas in California (CaNAA), and nonattainment areas outside California (NonCaNAA). Once split by area category, the data were placed into separate tables according to SIC and area category. Criteria specific to each industry were constructed to refine the data extracted. Source classification codes (SCCs), which identify different types of emission sources, were used as the primary criteria for extracting key facilities from each SIC-area grouping. Each emission source reported

for each facility in the NEI database was assigned an SCC. Another criterion used to improve the quality of the data set was the requirement that all facilities extracted have throughput or capacity data reported for at least one source.

Within each group of the key facilities, selection of a smaller sample of facilities from each SIC-area grouping was “randomized” to ensure a representative, unbiased collection of emissions data by facility size. This “random” facility selection was done by sorting the facilities within each group by total emissions (in total mass, not emission factors in mass per throughput) for all pollutants. (Facilities with higher total emissions are generally larger facilities, not necessarily facilities that employ fewer emissions controls.) A specified number of facilities (between 3 and 12, depending on the industry) was extracted from the top, middle, and bottom of each sorted list. Every emission source from each of these groupings was then reviewed to choose the most representative facilities: four top-emitting, three middle-emitting, and three bottom-emitting facilities. The following questions were used as further checkpoints when reviewing and selecting given facilities:

- Does the facility represent a complete group of process and combustion sources for the industry?
- Does at least one process source within the facility contain throughput or capacity data that represents the entire facility?
- Do different types of combustion sources contain throughput or capacity data?
- Unless the industry is found only in particular regions of the United States, are multiple states represented?
- If there are both controlled and uncontrolled sources within an SIC-area grouping, or different types of controls within an SIC-area grouping, is there a representative mixture of controlled and uncontrolled sources?

Once the representative key facilities were selected, emission sources were divided according to combustion sources and process source for each SIC-area grouping. Table 2-4 provides the original SIC-area groupings for industries for which we calculated emission factors. Several SIC-area groupings were dropped at various stages of the extraction and refinement analysis for different reasons, including missing or invalid throughput data (unavailable elsewhere) and unrepresentative facilities for a particular industry.

### ***III. Activity Data Used to Estimate Emission Factors***

For combustion sources, excluding those for electric utilities (which were processed differently, as described later), activity data provided in the NEI were used in all cases. Emission factors were developed in terms of mass per million Btu (mmBtu) of fuel input. Fuel specific heating values from AP-42 were used to convert fuel input units reported in NEI to units of mmBtu. Table 2-5 lists input units and heating values used for the different fuel types. As the table shows, heating values of the fuels are higher heating values (HHVs). Thus, emission factors generated from NEI are HHV-based. On the other hand, GREET simulations are conducted with the low heating values (LHVs) of fuels. The NEI-based emission factors were eventually converted into LHV-based emission factors for GREET simulations.

For process sources, activity data were used when these data were available and representative of the overall process for each facility in an industry. Table A-1 in Appendix A provides a summary of sources used for process source activity data.

**Table 2-4 Industries and Area Categories Originally Extracted for Calculation of Emission Factors**

SIC	Industry Description	AA	CaNAA	NonCaNAA
1221	Bituminous coal and lignite surface mining and processing	X		
1222	Bituminous coal underground mining and processing	X		
1311	Oil and NG production/processing	X		
1321	NG liquids production	X	X	X
1381	Oil and NG wells	X		
2869	Ethanol production	X		
2869	Methanol production (from NG)	X	X	X
2873	Nitrogen fertilizer production	X	X	X
2874	Phosphate fertilizer production	X	X	X
2911	Petroleum refineries	X	X	X
4612	Crude petroleum pipelines	X		
4613	Refined petroleum product pipelines	X	X	X
4911	Electric utilities: bituminous/sub-bituminous coal-fired, lignite-fired, NG-fired boilers, NG turbines, oil-fired boilers	X	X	X
4922	NG transmission and storage	X		
5171	Petroleum bulk terminals: crude, gasoline, diesel	X	X	X
5541	Service stations: gasoline, diesel	X	X	X

**Table 2-5 Fuel-Specific Data for Combustion Sources**

Fuel Type	NEI Throughput Unit	Higher Heating Value
Residual oil and waste oil	10 <sup>3</sup> gal/yr	150,000 Btu/gal
Distillate oil	10 <sup>3</sup> gal/yr	140,000 Btu/gal
Gasoline	10 <sup>3</sup> gal/yr	130,000 Btu/gal
Propane	10 <sup>3</sup> gal/yr	94,000 Btu/gal
NG and process/refinery gas	10 <sup>6</sup> ft <sup>3</sup> /yr	1,050 Btu/SCF
Coke	ton/yr	13,300 Btu/lb
Bituminous/subbituminous coal	ton/yr	13,000 Btu/lb
Solid waste	ton/yr	4,500 Btu/lb

For electric utilities, fuel throughputs from all combustion units within each facility were summed, and heat rates from EPA's E-GRID2000 (EPA 2004b) were used to convert the total annual throughputs to total electricity generated annually from each facility.

#### *IV. Calculation of Emission Factors from the NEI*

In general, annual emissions data were divided by industry-specific activity data to produce emission rates in mass/mmBtu. In all of the calculations, emissions reported as zero tons/yr from the NEI were treated as missing data instead of zero values. This procedure was performed to reduce "false" zeros that were meant to represent missing data, not zero emissions. Removing zeros from approximately 3% of the total data analyzed resulted in more accurate average emission factors. Both arithmetic averages and volume-weighted averages were estimated for each set of emission factors.

We used several criteria to reduce the amount of erroneous data originating from the NEI or to eliminate unrepresentative outliers. First, we removed any individual combustion equipment for which emission factors for all pollutants appeared to be different from the mean of the same facility type by at least two orders of magnitude. Twenty-three pieces of combustion equipment were eliminated as potential "outliers" based on this criterion. Secondly, we eliminated some data that were obviously based on input of the wrong emission factors. One example was diesel fuel refueling stations for which gasoline emission factors were used. Finally, we eliminated some of the data that were more than an order of magnitude higher than the mean of the same facility type and in cases in which the facility was an unusually small one, such as a 100-MW electric utility plant, as shown in NEI.

For electric utilities, E-GRID2000 (EPA 2004b) was used to determine the primary fuel type to assign to each facility. The E-GRID2000 fuel mix for each power plant needed to have at least 93% of its fuel input from a particular fuel type to be included in the grouping. To then estimate emission factors, we separated combustion and process sources at electric utilities using SCC criteria and summed the emissions data independently. These total emissions for each facility were then divided by the total electricity generated, resulting in combustion emission factors and process emission factors for each power plant in g/kWh of electricity generated.

If E-GRID2000 indicated that a particular power plant was a cogeneration facility, we performed additional calculations on the emissions and activity data to adjust for only a portion of the fuel inputs being used to generate electricity. An electric allocation factor provided in E-GRID2000 for each of the cogeneration facilities was used to modify the data. This allocation factor was multiplied by the emissions data and the total energy (in kWh) generated for each cogeneration facility.

#### *V. Results of Emission Factors*

Analyses of the data by ERG (Burklin and Alexander 2002) showed that, for most cases, there were not significant differences in emission factors for sources among the different geographic regions. For this reason, the data from the three region types were combined to estimate nationwide average emission factors.

Mean and median emission factors for the various point sources, and various other statistics, are provided in Tables A-2 through A-4 in Appendix A. Table A-2 shows emission factors for non-utility combustion sources. Table A-3 shows emission factors for process sources. Table A-4 shows emission factors for electric utility sources. The following sections describe how we used the data in Tables A-2 through A-4

to project emissions distributions for 2016 for sources other than electric utilities. Electric utility emissions distributions are discussed in a later section.

#### ***VI. Creation of Emission Distributions for Base Year 1999***

GREET utilizes probability-based distributions of emissions with Monte Carlo simulations to estimate emissions results with probability distributions. Therefore, it was necessary to fit emission data points from individual facilities with distribution functions. To accomplish this, the data from each source type were read into Crystal Ball™, a statistical software which, based on the number of data points and scatter of the data, attempts to fit a distribution about the data for that source type. In Crystal Ball™, a mathematical fit is performed to determine the set of parameters for each set of standard distribution functions that best describes the characteristics of the data. The quality or closeness of each fit is judged using a Chi-squared test. All distributions were also visually examined for reasonableness.

#### ***VII. Construction of Year 2016 Projected Distribution Functions***

##### ***A. Distribution Functions for Non-Utility Combustion Sources***

The previous section described distributions of emission factors based on the analysis of the 1999 NEI. These distributions provided a starting point for our estimate of the distribution of emission factors for the year 2016, the target year for our study. In this section, we describe the adjustment of these distributions to account for expected changes in emission factors attributable to (1) additional emissions controls that will be placed on newly constructed facilities, and (2) modifications to existing facilities. This section also describes the method used to establish estimates of emissions factor distributions for processes that were not included in the NEI.

For emissions sources that were included in the NEI, we evaluated — for each pollutant — the expected changes in emission distributions to account for additional controls expected to be in place by 2016. As part of this process, we examined some of the initiatives underway or being considered, including New Source Review Consent Decrees, New Source Performance Standards (NSPS), and the federal government's Clean Skies Initiative. None of these provided us with specific numbers we could use for estimating future emission factors. So we assembled a group of experts to make judgments concerning the impact of future regulations on the emission factor distributions in 2016. As part of this process, the group examined differences in emission factors between air quality attainment and nonattainment areas, past changes in emission factors (from EPA historical data), and lowest emission factors (from the NEI data). With all of these factors considered, we adjusted the distributions developed from the 1999 NEI to project distributions for 2016.

In making our adjustments, we did not apply one single methodology to all sources and pollutants. Instead, we examined each case individually and made appropriate judgments for each source by using several different methods. One frequent assumption we used was that controls would be instituted on the highest-emitting sources. Thus, we matched the maximum of our distribution to the second- or third-highest emission factors in the NEI data. In addition, for pollutants and sources for which additional controls were expected, we made sure the mean of the 2016 distribution was significantly below that of the current distribution. In some cases, the range of AP-42 factors was factored into the distribution decision.

Following are some examples to illustrate how we established the 2016 distributions for NO<sub>x</sub>, PM<sub>10</sub>, and VOC emissions. The examples were selected primarily on the basis of their importance in the overall WTT emissions results for the pathways in our WTW study. They also illustrate most of the

methodologies we used in developing the distributions. Appendix B provides a brief description of the methodologies used for each source and each pollutant. Tables 2-6 and 2-7 summarize distribution parameters for fuel combustion and noncombustion processes.

The first example, for NO<sub>x</sub> emissions, illustrates one of the common methods we used to adjust the distribution to represent the impacts of new controls by 2016. Figure 2-5 shows a cumulative distribution plot of NO<sub>x</sub> emissions for NG boiler combustion sources. The triangles show the NEI data with the percentile value of each, computed using Microsoft Excel's PERCENTRANK function. The line shows the distribution adjusted to represent 2016. Assuming that new controls will be implemented for the highest-emitting sources, we set the maximum to match that of the 98th percentile data point. The minimum was set to match the minimum value in *Power Magazine* (Schwieger et al. 2002), which summarized the emission factors for major U.S. electric power plants. The distribution did a good job of matching the remainder of the data and was consistent with the AP-42 range.

For industrial coal combustion sources, much fewer data were available in the NEI. In addition, as illustrated in Figure 2-6, five of the six data points had the same emission factor. These points, at 274 g/mmBtu, probably represent the use of standard factors rather than measured emissions data. We created a distribution with a minimum and a maximum value matching those from *Power Magazine* (Schwieger et al. 2002). In this distribution, the 10th percentile matches the minimum NEI data point, and the 90th percentile matches the upper AP-42 value.

Figure 2-7 shows the distribution we used for NO<sub>x</sub> emissions from residual oil boiler combustion sources. In this case, we set the maximum to just below the highest NEI data point. There was a large group of data near the lower AP-42 value that probably represent emission factors rather than measured data. The selected distribution assumes reductions in the lower portion of the distribution.

In developing the distribution curve for PM<sub>10</sub> emissions from combustion oil boilers, we compared the NEI data for residual oil boilers to that for diesel boilers. As shown in Table A-2 in Appendix A, the mean, minimum, and maximum for the residual oil boiler data were lower than those for diesel boilers. In our judgment, PM<sub>10</sub> emissions for residual oil would be generally higher than those for diesel boilers. Therefore, to maintain the PM<sub>10</sub> distribution higher than that of diesel boilers, we simply fit the distribution to the existing NEI data, as shown in Figure 2-8. The distribution was also consistent with the AP-42 range.

For NO<sub>x</sub> emissions from NG-fueled gas turbines, we expected the highest emitters to be subject to stricter controls by 2016. As shown in Figure 2-9, we developed a distribution in which the maximum was about half of the NEI maximum. We set the minimum of the distribution to be below the controlled AP-42 factor, to match the lowest data values from the NEI. Compared to the NEI data, the major change was to eliminate the highest part of the distribution.

#### *B. Example Distributions for Process Sources*

In the case of NO<sub>x</sub> emissions for petroleum refining, we also assumed that future reductions in NO<sub>x</sub> emissions would occur in the refineries with the higher emission factors. Figure 2-10 compares our selected distribution with the NEI data. Note that the distribution we selected closely matches the NEI up to about the 40th percentile, but projects that significant controls will be applied to reduce the emissions in the upper half of the distribution. We cannot effectively compare this distribution to AP-42 because there are many different AP-42 factors for the different refinery processes.

**Table 2-6 Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Fuel Combustion (g/mmBtu of fuel burned)**

Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a, b</sup>	P90 <sup>a</sup>
<b>NG-fired utility/Industrial boilers</b>				
VOCs	Extreme value	0.431	1.557	2.825
CO	Extreme value	4.392	16.419	29.904
NO <sub>x</sub>	Beta	18.519	52.890	102.063
PM <sub>10</sub>	Gamma	1.004	2.776	5.973
<b>NG-fired small industrial boilers</b>				
VOCs	Lognormal	0.632	2.417	4.889
CO	Exponential	2.512	16.529	54.908
NO <sub>x</sub>	Beta	8.889	33.284	74.706
PM <sub>10</sub>	Logistic	0.697	2.960	5.091
<b>NG-fired large gas turbines, combined-cycle gas turbines, and small gas turbines</b>				
VOCs	Beta	1.111	3.173	6.124
CO	Beta	8.554	23.144	40.772
NO <sub>x</sub>	Beta	36.043	106.924	197.651
PM <sub>10</sub>	Beta	0.365	1.078	2.210
<b>NG-fired reciprocating engines</b>				
VOCs	Exponential	3.512	23.105	76.753
CO	Exponential	26.340	173.287	575.646
NO <sub>x</sub>	Beta	178.320	491.442	892.459
PM <sub>10</sub>	Extreme value	3.691	5.530	7.710
<b>Oil-fired utility boilers, industrial boilers, and commercial boilers</b>				
VOCs	Weibull	0.299	1.079	4.872
CO	Extreme value	13.063	15.764	18.966
NO <sub>x</sub>	Normal	64.745	150.481	235.255
PM <sub>10</sub>	Extreme value	24.747	44.436	67.779
SO <sub>x</sub>	Beta	71.280	192.864	339.770
<b>Diesel-fired industrial boilers and commercial boilers</b>				
VOC	Extreme value	0.579	1.173	1.878
CO	Normal	12.684	16.686	20.688
NO <sub>x</sub>	Beta	32.576	70.561	110.275
PM <sub>10</sub>	Exponential	4.214	27.726	92.103
<b>Diesel-fired reciprocating engines</b>				
VOCs	Beta	21.609	76.737	155.460
CO	Beta	34.249	93.229	165.873
NO <sub>x</sub>	Beta	178.320	491.442	892.459
PM <sub>10</sub>	Beta	15.376	42.992	79.993
<b>Gasoline-fired reciprocating engines</b>				
VOCs	Beta	32.414	115.106	233.190
CO	Beta	51.374	139.844	248.810
NO <sub>x</sub>	Beta	124.824	344.009	624.721
PM <sub>10</sub>	Beta	6.150	17.197	31.997
<b>LPG-fired industrial boilers<sup>c</sup></b>				
NO <sub>x</sub>	Extreme value	43.211	71.619	105.299

Table 2-6 (Cont.)

Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a, b</sup>	P90 <sup>a</sup>
<b>LPG-fired commercial boilers<sup>c</sup></b>				
NO <sub>x</sub>	Extreme value	56.211	84.619	118.299
<b>Coal-fired industrial boilers</b>				
VOCs	Beta	0.241	1.540	4.730
CO	Beta	26.763	72.415	127.573
NO <sub>x</sub>	Extreme value	106.515	155.249	191.953
PM <sub>10</sub>	None	None	12.617	None
SO <sub>x</sub>	Extreme value	87.707	98.355	110.981

<sup>a</sup> Here, P10 values mean that there is a probability of 10% that actual values would be equal to or below the P10 values; P50 values mean that there is a probability of 50% that actual values would be equal to or below the P50 values; and P90 values mean that there is a probability of 90% that actual values would be equal to or below the P90 values.

<sup>b</sup> For extreme value, lognormal, logistic, and normal distribution functions, the mean values, instead of the P50 values, are presented here.

<sup>c</sup> Distribution functions were established only for NO<sub>x</sub> emissions of LPG-fired industrial and commercial boilers. Emissions for other pollutants were point estimates.

Table 2-7 Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Non-Combustion Processes (g/mmBtu of fuel throughput)

Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a, b</sup>	P90 <sup>a</sup>
<b>Petroleum-refinery process emissions for gasoline<sup>c</sup></b>				
VOC	Beta	0.542	2.022	4.500
CO	Beta	0.271	1.011	2.250
NO <sub>x</sub>	Beta	0.285	1.120	2.781
PM <sub>10</sub>	Beta	0.114	0.309	0.544
SO <sub>x</sub>	Beta	0.989	3.769	8.771
<b>Petroleum-refinery process emissions for LPG and residual oil<sup>c</sup></b>				
VOC	Beta	0.493	1.840	4.095
CO	Beta	0.247	0.920	2.048
NO <sub>x</sub>	Beta	0.259	1.019	2.531
PM <sub>10</sub>	Beta	0.104	0.281	0.495
SO <sub>x</sub>	Beta	0.900	3.430	7.982
<b>Petroleum-refinery process emissions for diesel fuel<sup>c</sup></b>				
VOC	Beta	0.526	1.961	4.365
CO	Beta	0.263	0.981	2.183
NO <sub>x</sub>	Beta	0.276	1.086	2.698
PM <sub>10</sub>	Beta	0.111	0.300	0.528
SO <sub>x</sub>	Beta	0.959	3.626	8.508




Table 2-7 (Cont.)


Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a,b</sup>	P90 <sup>a</sup>
<b>Petroleum-refinery process emissions for crude naphtha<sup>c</sup></b>				
VOC	Beta	0.509	1.901	4.230
CO	Beta	0.255	0.950	2.115
NO <sub>x</sub>	Beta	0.268	1.053	2.614
PM <sub>10</sub>	Beta	0.107	0.290	0.511
SO <sub>x</sub>	Beta	0.930	3.543	8.245
<b>VOC from gasoline bulk terminals</b>	Beta	2.245	6.276	11.678
<b>VOC from gasoline refueling stations</b>	Gamma	2.000	10.000	40.000
<b>VOC from LPG refueling stations</b>	Gamma	0.200	1.000	4.000
<b>VOC from diesel bulk terminals</b>	Extreme value	0.031	0.207	0.316
<b>VOC from diesel refueling stations</b>	Beta	0.314	0.849	1.495
<b>VOC from naphtha bulk terminals</b>	Beta	2.245	6.276	11.678
<b>VOC from naphtha refueling stations</b>	Gamma	2.000	10.000	40.000
<b>Process-related emissions of NG processing plants</b>				
VOC	Beta	1.568	4.243	7.475
CO	Beta	0.428	1.157	2.039
NO <sub>x</sub>	Beta	0.363	1.355	3.015
PM <sub>10</sub>	Beta	0.006	0.019	0.036
SO <sub>x</sub>	Beta	2.287	8.638	19.722
<b>H<sub>2</sub> plant process emissions<sup>d</sup></b>				
VOC	Beta	0.861	1.903	2.729
CO	Beta	3.883	9.433	14.107
NO <sub>x</sub>	Gamma	9.181	14.000	22.274
PM <sub>10</sub>	Beta	8.011	11.836	14.716
<b>MeOH plant process emissions<sup>d</sup></b>				
VOC	Beta	0.904	1.998	2.865
CO	Beta	4.077	9.905	14.812
NO <sub>x</sub>	Gamma	9.640	14.700	23.387
PM <sub>10</sub>	Beta	8.412	12.428	15.452
<b>VOCs from MeOH refueling stations</b>	Gamma	2.000	10.000	40.000
<b>FT diesel plant process emissions<sup>d</sup></b>				
VOC	Beta	0.973	2.150	3.084
CO	Beta	4.388	1.066	15.941
NO <sub>x</sub>	Gamma	10.375	15.820	25.170
PM <sub>10</sub>	Beta	9.052	13.375	16.629
<b>Corn EtOH plant process emissions</b>				
VOC	Beta	18.579	26.724	33.671
PM <sub>10</sub>	Beta	4.408	11.250	18.092
<b>Cellulosic EtOH process emissions</b>				
VOC	Beta	9.290	13.369	16.842
PM <sub>10</sub>	Beta	4.408	11.250	18.092

Table 2-7 (Cont.)


Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a,b</sup>	P90 <sup>a</sup>
VOCs from EtOH bulk terminals	Beta	2.245	6.276	11.678
VOCs from EtOH refueling stations	Gamma	2.000	10.000	40.000
<b>PM<sub>10</sub> emissions of coal mining</b>				
Underground mining	Beta	11.120	30.087	53.004
Surface mining	Beta	84.110	227.579	400.928

- <sup>a</sup> Here, P10 values mean that there is a probability of 10% that actual values would be equal to or below the P10 values; P50 values mean that there is a probability of 50% that actual values would be equal to or below the P50 values; and P90 values mean that there is a probability of 90% that actual values would be equal to or below the P90 values.
- <sup>b</sup> For extreme value, lognormal, and normal distribution functions, the mean values, instead of the P50 values, are presented here.
- <sup>c</sup> Distribution functions of criteria pollutant emissions were established for gasoline production in refineries. Distribution functions for residual oil, LPG, diesel, and crude naphtha are derived from those for gasoline, with adjustment of relative refining energy efficiency between that of gasoline and that of each of the other fuels.
- <sup>d</sup> Distribution functions of criteria pollutant emissions were established for hydrogen production in SMR plants. Distribution functions for methanol and FT diesel plants are derived from those for hydrogen plants, with adjustment of relative energy efficiency between that of hydrogen and those of methanol and FT diesel.

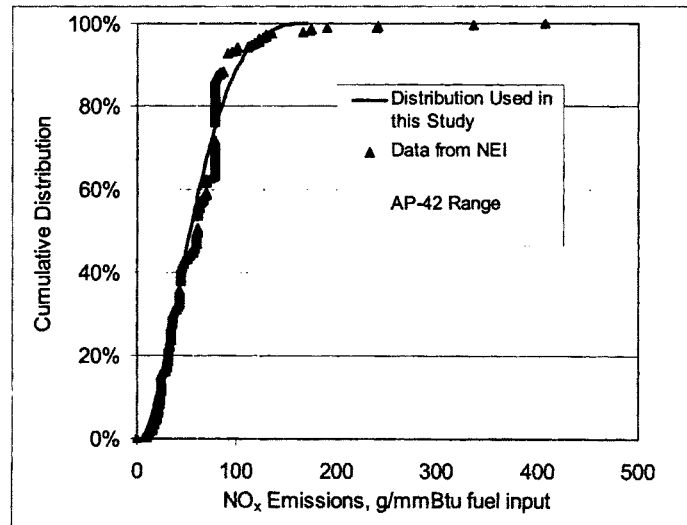Figure 2-5 NO<sub>x</sub> Emissions Distribution for NG Boiler Combustion Sources

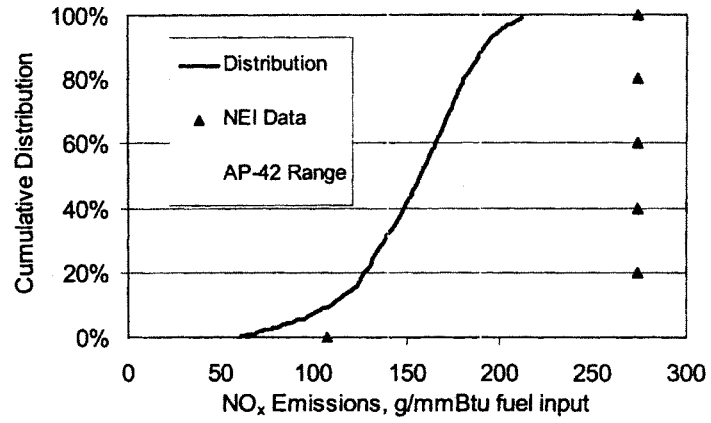

**Figure 2-6 NO<sub>x</sub> Emissions Distribution for Industrial Coal Boiler Combustion Sources**

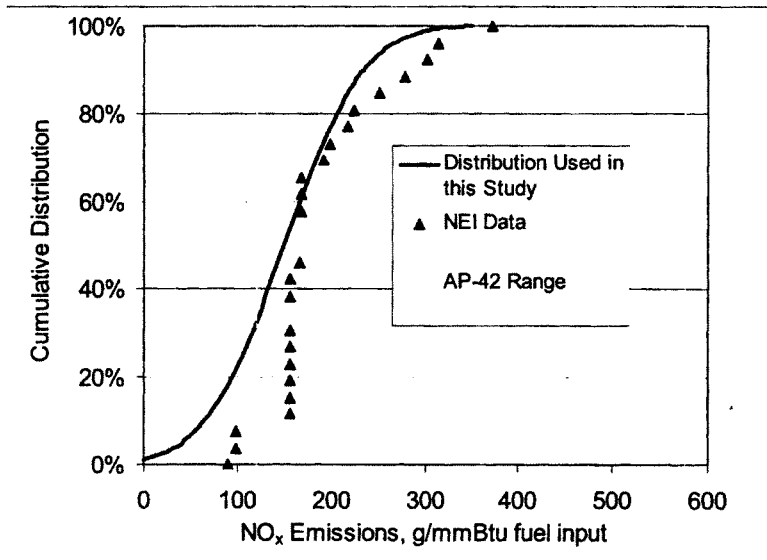

**Figure 2-7 NO<sub>x</sub> Emissions Distribution for Oil Boiler Combustion Sources**

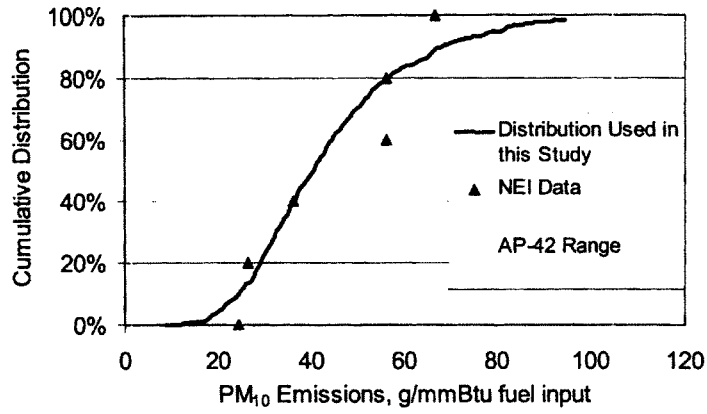


Figure 2-8 PM<sub>10</sub> Emissions Distribution for Oil Boiler Combustion Sources


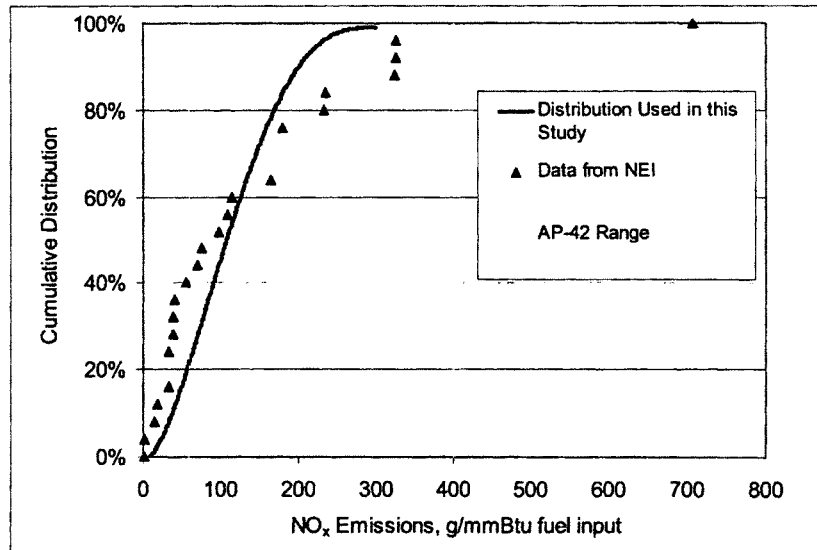


Figure 2-9 NO<sub>x</sub> Emissions Distribution for NG Turbine Combustion Sources

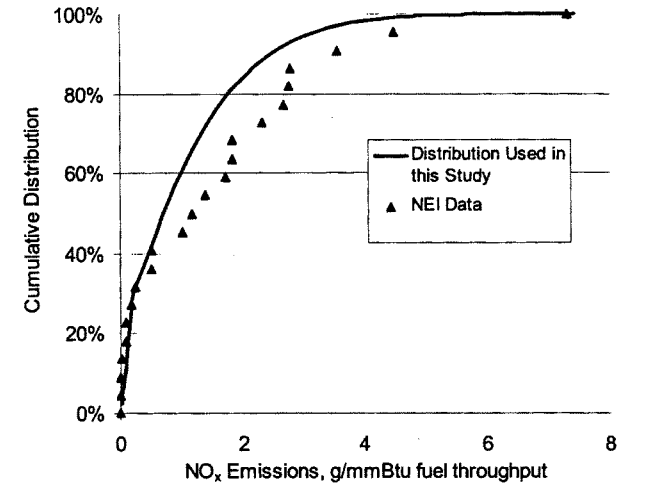

**Figure 2-10 NO<sub>x</sub> Emissions Distribution for Gasoline Refining Processes**

Figure 2-11 shows PM<sub>10</sub> emission factors for petroleum refinery process emissions. To construct this distribution, we set the maximum of our distribution to match that the second-highest data point from the NEI database. This approach, which reflects our assumption that the highest emitters will be subject to stricter controls by 2016, resulted in a distribution that had a 50th percentile of about 0.3, which was about the mode of the NEI database.

A similar technique was used for developing the 2016 distribution for VOC emissions associated with gasoline refining processes. As shown in Figure 2-12, we set the maximum of the distribution to 10 g/mmBtu fuel throughput, which was about the 90th percentile of the NEI data distribution.

In creating the distribution for VOC emissions from gasoline distribution bulk terminals, we assumed that the highest-emitting sources would be subject to stricter controls. The distribution and NEI data are shown in Figure 2-13.

An important source of VOCs for the gasoline WTT pathway is evaporative emissions that occur at gasoline refueling stations. As shown in Figure 2-14, the data from the NEI were bimodal. One set of data under 10 g/mmBtu probably represents stations at which evaporative emissions controls are in place. The remaining set of data, at just under 50 g/mmBtu, probably represents uncontrolled emissions. These data represent standard emission factors rather than measurements. The distribution we used for this study reflects the expectation that by 2016, a much larger fraction of gasoline refueling stations will have evaporative emissions controls in place.

Figure 2-15 shows VOC emission factors for production processes in ethanol plants. For this process, we assumed significant reductions from the current NEI data to 2016 production partly to account for a new

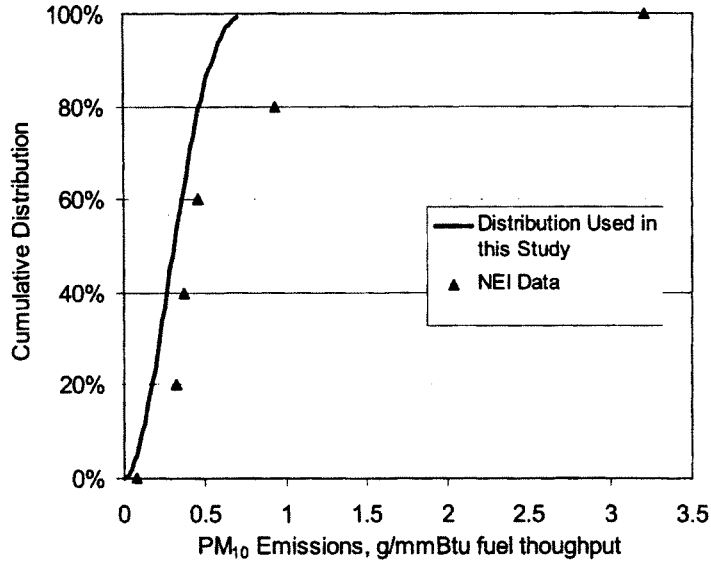


Figure 2-11 PM<sub>10</sub> Emissions Distribution for Gasoline Refining Processes

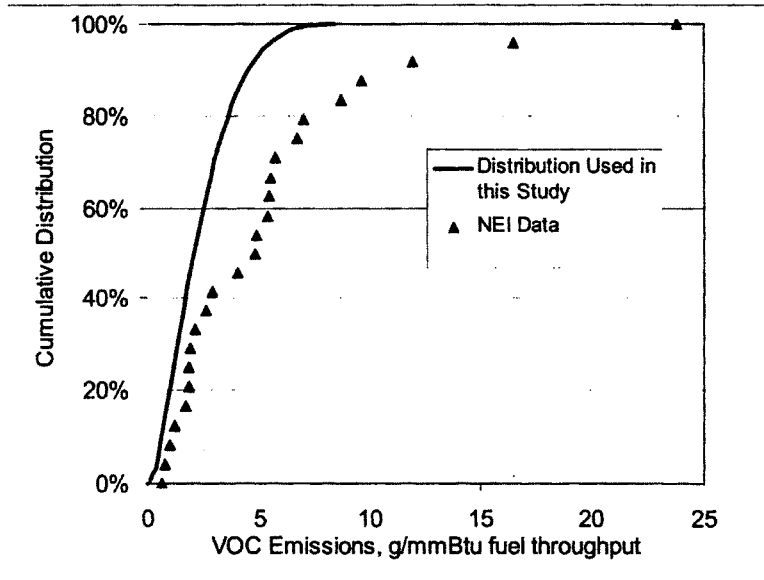


Figure 2-12 VOC Emissions Distribution for Gasoline Refining Processes

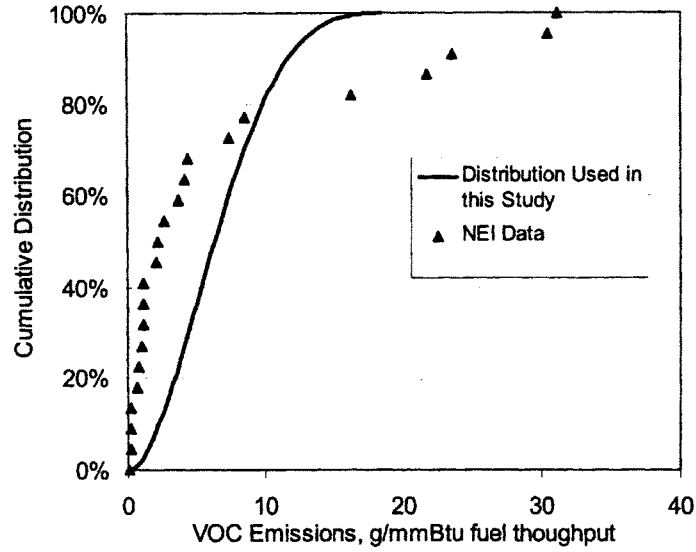


Figure 2-13 VOC Emissions Distribution for Gasoline Bulk Terminals


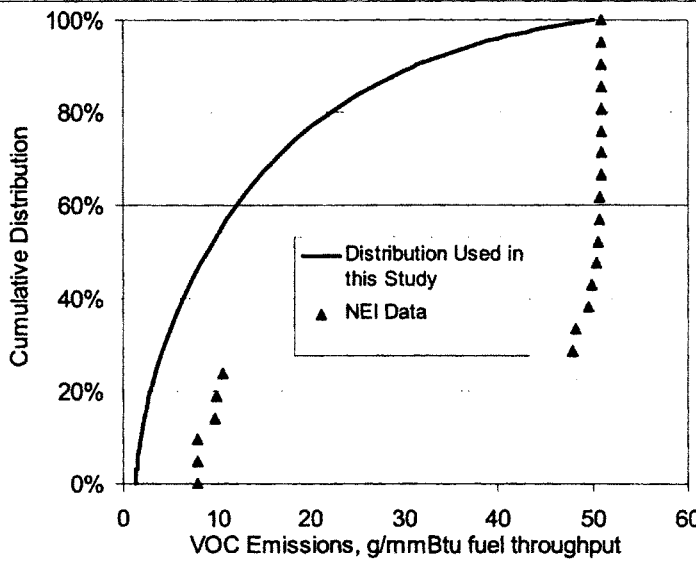


Figure 2-14 VOC Emissions Distribution for Gasoline Refueling Stations

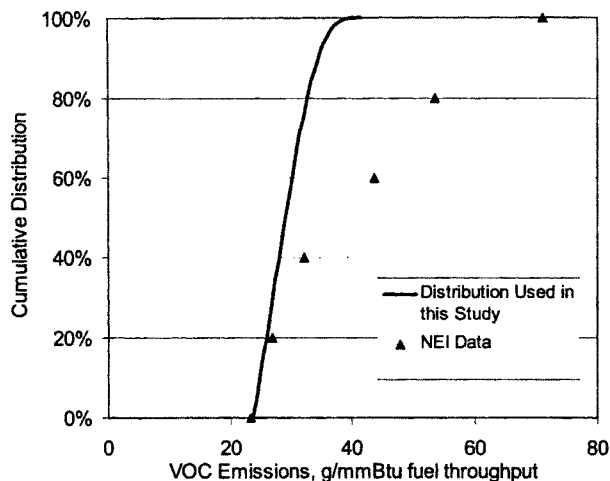

**Figure 2-15 VOC Emissions Distribution for Ethanol Production Processes**

effort, based on a 2002 agreement between EPA and ethanol plant operators, to control VOC emissions. Our distribution has a minimum equal to the minimum of the NEI data and a maximum near the three highest points of the NEI data. The 50th percentile of the distribution was about 30 g/mmBtu, which is near the 30th percentile of the NEI data.

Similarly, a significant reduction in emission factors was assumed by 2016 for PM<sub>10</sub> emissions associated with the ethanol production process (see Figure 2-16). The maximum of the distribution was set to the second-highest point in the NEI data. The minimum was set to near zero. The mean of the 50th percentile of the distribution was just over half that of the NEI data.

The NEI did not include any data for the process of reforming NG into hydrogen. To fill in this gap, we solicited data from companies with experience in producing hydrogen from NG. The data we received reflected a range of emission factors for plants without controls, and one example emissions factor for a site with controls. These data are shown in Figure 2-17. We assumed a distribution with the controlled site source data representing about a 20th percentile and a maximum near the lower portion of the range of uncontrolled factors.

Figure 2-18 shows the projected distribution used for PM<sub>10</sub> emissions for hydrogen production. The PM<sub>10</sub> emissions factor data we obtained from manufacturers for hydrogen are relatively low compared to those for other processes. Therefore, in constructing the distribution for 2016, we did not project substantial additional controls over those reported by the manufacturers by 2016.



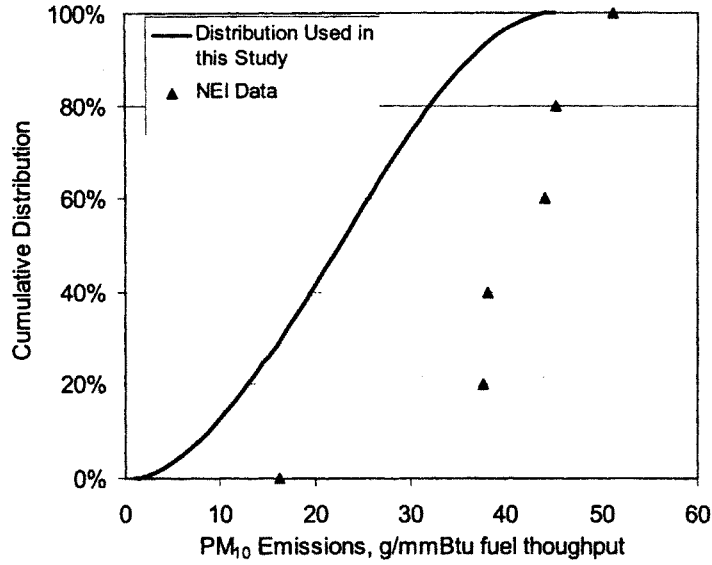


Figure 2-16 PM<sub>10</sub> Emissions Distribution for Ethanol Production Processes


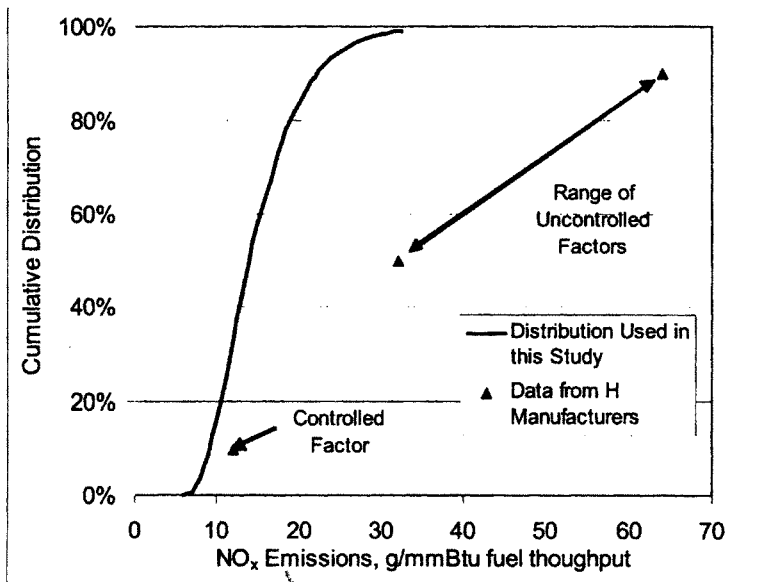


Figure 2-17 NO<sub>x</sub> Emissions Distribution for Hydrogen Production by NG Steam Methane Reforming Process

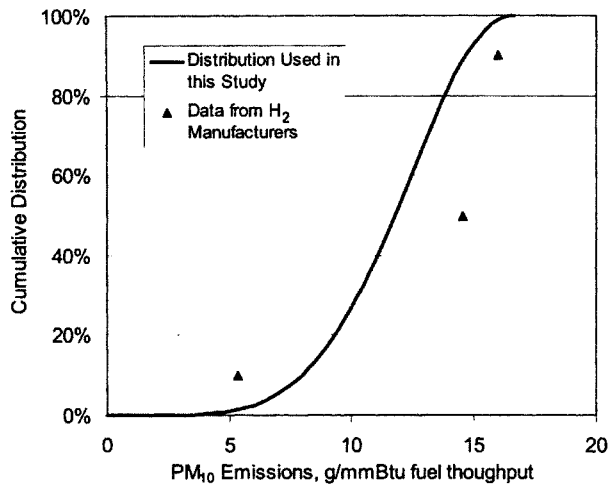


**Figure 2-18 PM<sub>10</sub> Emissions Distribution for Hydrogen Production by NG Steam Methane Reforming Process**

PM<sub>10</sub> process emissions from underground coal/lignite mining are shown in Figure 2-19. In developing the distribution for our study, we assumed that additional controls would be applied to the higher-emitting mine sources. Therefore, we matched the maximum of the distribution to the second-highest NEI data point and set the minimum to near zero.

#### *C. Distribution Functions for Electric Utility Combustion/Process Sources*

Although we did not examine electric vehicles or grid-powered hybrid vehicles in this study, many of the WTI processes in our study consume electricity. In addition, electricity is used for hydrogen production via electrolysis. In projecting emissions distributions for 2016 electric utility sources, we took a somewhat different approach than that taken for other sources in order to take advantage of a recent analysis of electric utility emissions by EPA to support its adopted Interstate Air Quality Rule (IAQR) (EPA 2004a; see <http://www.epa.gov/interstateairquality/basic.html> for all documents and data files related to the IAQR). According to EPA, the adopted IAQR would reduce emissions of SO<sub>2</sub> and NO<sub>x</sub> in 29 eastern states and the District of Columbia in two phases. SO<sub>2</sub> emissions would be reduced by 3.6 million tons in 2010 (approximately 40% below 2002 levels) and by another 2 million tons per year when the rules are fully implemented (approximately 70% below 2002 levels). NO<sub>x</sub> emissions would be cut by 1.5 million tons in 2010 and by 1.8 million tons annually in 2015 (about 65% below 2002 levels). Each affected state would be required to revise its state implementation plan to include control measures to meet specific statewide emission reduction requirements.

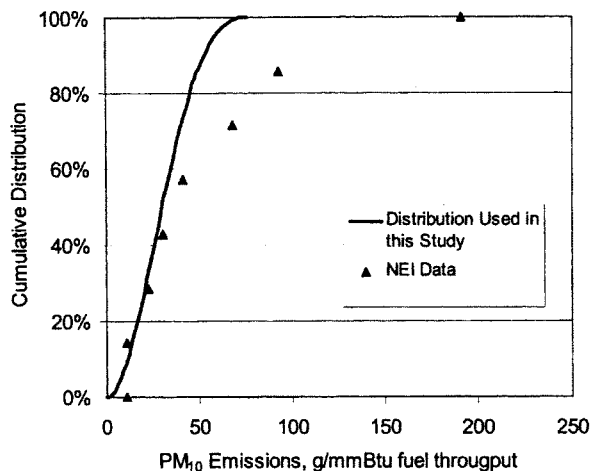

**Figure 2-19 PM<sub>10</sub> Emissions for Underground Coal/Lignite Mining Process**

EPA's analysis supporting the rule (<http://www.epa.gov/interstateairquality/rule.html>) included current electric utility emissions, projected 2015 utility emissions, and projected 2015 utility emissions with implementation of the IAQR. EPA's projected emissions are summarized in Table 2-8.

In constructing the 2001 and 2015 baseline electric generation utility projections listed in Table 2-8, EPA started with 1996 gridded inventories for the Urban Airshed Model (UAM) air quality modeling from the NO<sub>x</sub> State Implementation Plan (SIP) call. The 1996 inventories were converted to 2001 base-case emissions by using ratios of 2001 to 1996 emissions by state. The electric utility generation emissions were projected to 2010 and 2015 by using EPA's Integrated Planning Model (IPM), version 2.1.6. IPM included the following already-promulgated or state-adopted controls:

- NO<sub>x</sub> SIP call, as remanded (excludes controls in Georgia and Missouri),
- NO<sub>x</sub> Reasonably Available Control Technology (RACT) controls in 1-h ozone nonattainment areas,
- Incorporation of several state-mandated emission caps and New Source Review (NSR) settlements, and
- Updates to NG and coal supply curves.

To project the impact of the adopted IAQR, which applies to 28 eastern states and Washington, D.C., EPA estimated state-by-state emission reductions using the caps in the adopted rule. The resulting state-by-state percent reductions were applied to the detailed emissions of each electricity generation unit. The assumed total electric generation activity corresponding to the emissions listed in Table 2-8 was 2,583 billion kWh for 2001 and 3,350 billion kWh for 2015. On the basis of these activities and the total emissions listed in Table 2-8, we calculated projected emission factors, listed in Table 2-9.

**Table 2-8 Projected Annual Emissions from U.S. Electricity Generation (in tons)<sup>a</sup>**

Year	VOC	NO <sub>x</sub>	CO	SO <sub>2</sub>	PM <sub>10</sub>
2001	57,485	4,824,967	451,932	10,714,558	224,044
2015 base case	34,332	4,008,241	700,418	9,222,097	223,265
2015 IAQR case	33,846	2,304,175	713,590	5,401,704	223,046

<sup>a</sup> Information processed from data files presented at <http://www.epa.gov/interstateairquality/rule.html>.

**Table 2-9 Projected U.S. Electricity Generation Emission Factors (g/kWh)**

Year	VOC	NO <sub>x</sub>	CO	SO <sub>2</sub>	PM <sub>10</sub>
2001	0.0202	1.6984	0.1591	3.7715	0.0789
2015 base case	0.0093	1.0877	0.1901	2.5026	0.0606
2015 IAQR case	0.0092	0.6253	0.1937	1.4660	0.0605

For this study, 2016 electric utility emissions distributions were constructed so that U.S.-mix-weighted emission factors were consistent with the 2015 base emissions listed in Table 2-9. Furthermore, to evaluate the impact of the adopted IAQR on WTW emissions, we developed a set of distributions corresponding to the 2015 IAQR emission factors. Two different methodologies were used for constructing these distributions. For VOCs, CO, and PM<sub>10</sub> emissions, we first constructed distributions based on the NEI study described previously. We compared the resulting U.S.-mix-weighted emission factors to those listed in Table 2-9 for the 2015 base case. EPA's 2015 baseline distributions were 38%, 25%, and 41% lower for VOCs, CO, and PM<sub>10</sub>, respectively, than those derived from the latest NEI. Next, we adjusted the VOC, CO, and PM<sub>10</sub> distribution scaling factors to reduce the means for each source type by 38%, 25%, and 41%, respectively. The resulting U.S.-mix-weighted emission factors matched those in Table 2-10. Properties of these distributions are given in Table 2.10.

More rigorous distributions were constructed for NO<sub>x</sub> and SO<sub>2</sub>, because in the documentation supporting the IAQR (EPA 2004a; see <http://epa.gov/interstateairquality/rule.html> for data files), EPA provided spreadsheets of projected NO<sub>x</sub> and SO<sub>2</sub> emissions for each electricity generation unit in 2015. We used these projected emissions for each unit to construct NO<sub>x</sub> and SO<sub>2</sub> distribution curves for each utility type in our study. The first step in our analysis was to classify each electricity generation unit according to the utility type used in GREET: coal or lignite boiler, oil boiler, NG boiler, NG turbine, NG combined cycle, or biofuel. We computed emission factors for each plant, based on the tons of emissions and annual electricity output from the EPA analysis, and we averaged these factors for each GREET utility type. To check this analysis, we also computed average emission factors for each GREET type by summing the tons of NO<sub>x</sub> or SO<sub>2</sub> within each plant category and dividing by the total GWh for that GREET type. The NO<sub>x</sub> emissions factor results are listed in Table 2-11.

Table 2-11 shows that NO<sub>x</sub> emission factors are highest for coal boilers, intermediate for NG boilers as turbines, and lowest for NG combined cycle. The table also shows that the IAQR regulation primarily impacts plants powered by coal boilers.

**Table 2-10 Parameters for Distribution Functions of Criteria Pollutant Emission Factors for Electric Power Plants (g/kWh of electricity generated)**

Item	Type of Function	P10 <sup>a</sup>	P50 <sup>a</sup>	P90 <sup>a</sup>
<b>Oil-fired utility boilers</b>				
VOC	Extreme value	0.0093	0.0416	0.0623
CO	Beta	0.0842	0.2150	0.3458
NO <sub>x</sub>	Extreme value	0.7795	1.7158	2.8259
PM <sub>10</sub>	Beta	0.0139	0.0397	0.0765
SO <sub>x</sub>	Extreme value	0.7799	5.6602	10.6957
<b>NG-fired utility boilers</b>				
VOC	Beta	0.0066	0.0177	0.0313
CO	Beta	0.0766	0.2071	0.3649
NO <sub>x</sub>	Extreme value	0.1692	0.7972	1.5417
PM <sub>10</sub>	Beta	0.0084	0.0228	0.0401
SO <sub>x</sub>	Extreme value	0.0000	0.2035	0.3842
<b>NG-fired single-cycle and combined-cycle turbines</b>				
VOC	Beta	0.0138	0.0386	0.0718
CO	Extreme value	0.0000	0.2838	0.5476
NO <sub>x</sub>	Lognormal	0.0576	0.6126	1.3914
PM <sub>10</sub>	Extreme value	0.0000	0.0266	0.0513
SO <sub>x</sub>	Beta	0.0139	0.0397	0.0765
<b>Coal-fired utility boilers</b>				
VOC	Beta	0.0050	0.0135	0.0238
CO	Beta	0.0979	0.2500	0.4021
NO <sub>x</sub>	Extreme value	1.0197	1.8387	2.8097
PM <sub>10</sub>	Beta	0.0408	0.1205	0.2081
SO <sub>x</sub>	Gamma	0.8059	3.0213	8.0293

<sup>a</sup> Here, P10 values mean that there is a probability of 10% that actual values would be equal to or below the P10 values; P50 values mean that there is a probability of 50% that actual values would be equal to or below the P50 values; and P90 values mean that there is a probability of 90% that actual values would be equal to or below the P90 values.

**Table 2-11 Comparison of Two Methods for Calculating Utility NO<sub>x</sub> Emission Factors (g/kWh of electricity generated)**

	Mean of Individual Plant Emission factors		Based on Total NO <sub>x</sub> and Total Amount of Electricity	
	Baseline	IAQR	Baseline	IAQR
Coal boiler	1.91	1.40	1.56	0.88
NG boiler	0.57	0.56	0.43	0.41
NG turbine	0.53	0.53	0.42	0.42
NG combined cycle	0.29	0.29	0.09	0.09

Another observation from Table 2-11 is that emission factors computed by averaging the emission factors for each plant were higher than those computed by summing the mass of emissions from all plants and dividing by the total amount of electric energy generated. The cause for the discrepancy was that smaller-capacity plants tended to have higher emission factors than larger plants.

Based on this analysis, it was clear that electric utility plant generation capacity had to be taken into account when creating emission factor distributions. Unfortunately, Crystal Ball™ did not have a procedure for weighting individual points, so we developed a method to approximate fitting a weighted distribution. For each GREET type and for both the baseline and IAQR cases, histograms of emission factors were created by using preselected bins. Then, total GWh was computed for each "bin." This method resulted in a histogram table of the total GWh of electricity generated at each emission factor bin value. Next, we developed a set of numbers in which each bin value was replicated a number of times proportional to the total GWh for each bin. From this set of numbers, we created a GWh-weighted distribution consisting of 100–1,000 total points. Finally, Crystal Ball™ was used to fit distributions to the total GWh-weighted emission factor data, and the best fit was selected by using the Anderson-Darling method. If necessary, the minimum value of the distribution was set to zero to avoid negative emission factor predictions. The means of these distributions match the means derived by total  $\text{NO}_x$ /total GWh in Table 2-11.

This section provides several examples of electric utility distributions to demonstrate the methodology. The first example, Figure 2-20, shows  $\text{NO}_x$  emissions for utility coal boilers for the baseline and IAQR assumptions. Each graph in this section has three different curves. The first curve, indicated by diamonds, shows a cumulative distribution of emission factors computed on the basis of equal weighting for each individual plant. The second curve, indicated by triangles, shows the GWh-weighted distribution for each bin, computed as described in the previous section. Finally, the third curve, indicated by a solid line, shows the continuous distribution resulting from the Crystal Ball™ fit of the GWh-weighted points.

As is shown in the left side of Figure 2-20, a distribution created on the basis of individual plants results in a higher distribution of emission factors than that based on the GWh-weighted analysis. The left side of Figure 2-20 also shows that the distribution used in this study was a good fit of the cumulative distribution of weighted emission factors. Both distributions show a long tail of significantly high emission factors above the 90th percentile.

The adopted IAQR rule permits emissions trading among utility sources, so it is not possible to predict precisely the utility distributions under the IAQR. Comparing the IAQR to the baseline portion of Figure 2-20 illustrates the results of EPA's analysis. The main reduction in emissions was projected to take place in the generating plants with low emission factors. As indicated earlier, these are also the largest plants. This results in a discontinuity in the individual-plant distribution that is also seen in the weighted distribution. This discontinuity is smoothed out in the Crystal Ball™ fit, as shown by the solid line. Comparing the right to the left side of Figure 2-20 shows that the IAQR distribution estimated significantly lower  $\text{NO}_x$  emission factors for utility coal boilers. The 50th percentile  $\text{NO}_x$  emissions factor was about 1.5 g/kWh for the baseline and about 0.6 g/kWh for the IAQR.

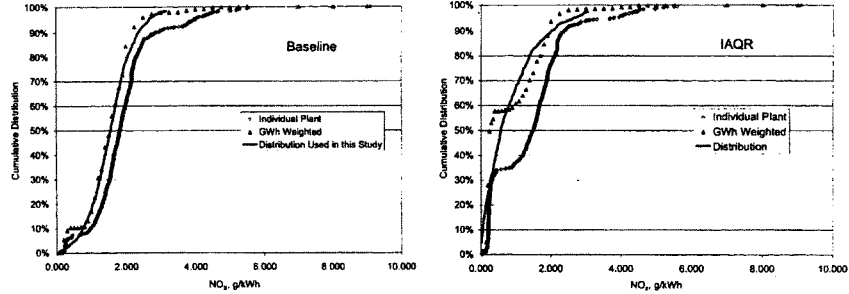


Figure 2-20 NO<sub>x</sub> Emissions for Utility Coal Boilers

Figure 2-21 shows baseline and IAQR distributions for SO<sub>2</sub> from utility coal boilers. As with NO<sub>x</sub>, the results show a small number (~2%) of plants with high SO<sub>2</sub> emission factors. For both the baseline and IAQR cases, the distributions used in this study matched up well with the discrete GWh-weighted emission factor distributions. The 50th percentile for the baseline was about 3.1 g/kWh, compared to about 1.8 g/kWh for the IAQR case. From the 10th to the 90th percentile, the IAQR distribution for SO<sub>2</sub> emission factors was significantly lower than that for the baseline.

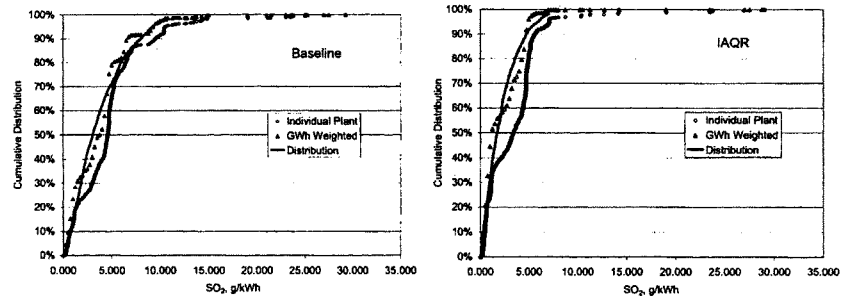


Figure 2-21 SO<sub>2</sub> Emissions for Utility Coal Boilers

Figure 2-22 shows distributions for NO<sub>x</sub> emission factors from utility NG boilers. Again, the importance of weighting the distributions according to power generation is shown. EPA's analysis does not predict substantial changes in NO<sub>x</sub> emissions from NG boilers for the IAQR. The right and left sides of Figure 2-22 are nearly identical. Compared to coal boilers, the NG boiler distributions have lower NO<sub>x</sub> emissions across the distribution range.

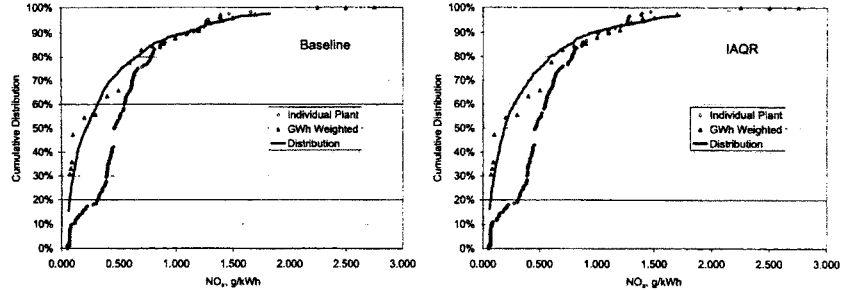


Figure 2-22 NO<sub>x</sub> Emissions for Utility NG Boilers

Figure 2-23 shows NO<sub>x</sub> emission factors distributions for utility NG combined-cycle plants. Of all of the examples shown, this figure best illustrates the importance of using the GWh-weighted distributions. The IAQR is projected to have little effect on NO<sub>x</sub> emissions from NG combined cycle. NO<sub>x</sub> emissions are significantly lower than those for NG or coal combustion.

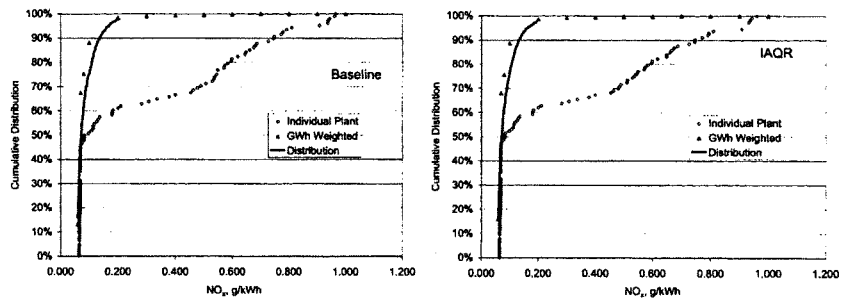


Figure 2-23 NO<sub>x</sub> Emissions for Utility NG Combined Cycle Turbines

## 2.2 Tank-to-Wheels Technology Options and Simulation Methodologies

### 2.2.1 Tank-to-Wheels Vehicle Propulsion Options

As in the Phase I study, the vehicle modeled in this study was a full-sized pickup truck. We selected a truck for two reasons: (1) it is one of GM's highest-selling vehicle platforms, and (2) because light duty trucks are a high-fuel-consumption vehicle platform, any reduction in energy consumption and GHG emissions will have a large impact.

The TTW propulsion systems analyzed in this study are summarized in Table 2-12. All powertrains were modeled in both non-hybrid and hybrid architecture. The baseline engine was a port-fuel-injected,



Table 2-12 TTW Propulsion Systems and Notation Used in this Report

Propulsion System	TTW Notation Used in Report	
	Non-Hybrid	Hybrid Electric
Gasoline displacement-on-demand spark-ignition	Gasoline DOD SI CD	Gasoline DOD SI HEV
Gasoline direct-injection spark-ignition	Gasoline DI SI CD	Gasoline DI SI HEV
Diesel direct-injection compression-ignition	Diesel DI CI CD	Diesel DI CI HEV
E85 flexible-fuel displacement-on-demand spark-ignition	E85 DOD SI CD	E85 DOD SI HEV
CNG displacement-on-demand spark-ignition	CNG DOD SI CD	CNG DOD SI HEV <sup>a</sup>
Hydrogen displacement-on-demand spark-ignition (Bin 5 or 2 NO <sub>x</sub> )	H <sub>2</sub> DOD SI CD <sup>a</sup>	H <sub>2</sub> DOD SI HEV <sup>a</sup>
Gasoline/naphtha fuel processor fuel cell	Gasoline FP FCV	Gasoline FP FC HEV
Methanol fuel processor fuel cell	MeOH FP FCV	MeOH FP FC HEV
Ethanol fuel processor fuel cell	EtOH FP FCV	EtOH FP FC HEV
Gaseous/liquid hydrogen fuel cell	H <sub>2</sub> FCV	H <sub>2</sub> FC HEV

<sup>a</sup> TTW pathway not included in the Phase 1 study.

gasoline SI engine with DOD technology. DOD is expected to be in common use in GM trucks in 2010. We also modeled this port-fuel-injected SI DOD technology for engines operating on fuel ethanol (E85), CNG, and hydrogen. To indicate the potential of advanced SI technology, we modeled a lean-burn DI SI engine fueled with gasoline. A DI CI engine was also modeled; performance on petroleum-derived and FT diesel fuels was assumed to be equal.

For fuel cell propulsion systems, we considered both direct-hydrogen and onboard fuel processing. Because the choice of fuel type impacts fuel-processing efficiency, we conducted separate analyses of hydrocarbon (gasoline/naphtha), methanol, and ethanol fuel processor FCVs.

All of the TTW propulsion systems examined in the Phase 1 study were included in the Phase 2 study. Propulsion systems added in the Phase 2 study were CNG hybrid, hydrogen ICE, and hydrogen ICE hybrid.

## 2.2.2 Tank-to-Wheels Vehicle Propulsion System Simulations

Phase 1 of the GM North American study (GM et al. 2001) encompassed powertrain technologies targeted for the 2010 timeframe. The study did not include a complete set of conventional powertrain technologies already being considered for production or others that are still in the R&D phase. During the Phase 2 study, the list of technologies and performance maps were updated for application to 2010 model-year (MY) production. As in the Phase 1 study, analysis of fuel economy and emissions was based on maintaining equal performance attributes for vehicles equipped with the various propulsion systems. Although cold-start conditions and criteria pollutants were not specifically modeled because of a lack of data for all technologies, the analysis approach assumed that these technologies would be compliant with EPA emission standards by including penalties for the aftertreatment systems.

Emissions targets for criteria pollutants for all vehicle concepts, which were based on EPA's Tier 2 standards, are discussed in detail in Section 2.2.2.4. Cost and packaging issues were not addressed because of the uncertainties surrounding the fuel cell and fuel reformer technologies. Further breakthroughs in the areas of fuel processor dynamics and start-/warm-up for the fuel processor system would be needed.

The analysis was based on high-integrity component characteristics data obtained from experts working on these advanced technologies throughout GM. The predictions based on these data were reviewed by their technology owners, ensuring agreement with corporate forecasts, market requirements, and customer expectations for performance and environmental friendliness. The tradeoffs among performance, fuel consumption, and emissions were treated in a consistent manner for all concepts to allow for robust fuel economy and energy consumption comparisons.

### 2.2.2.1 Vehicle Simulation Approach

The analysis was carried out by using a validated GM proprietary modeling tool, the Hybrid Powertrain Simulation Program (HPSP), which uses the reverse-driven simulation approach illustrated in Figure 2-24. Simulation was initiated by the instantaneous road-load requirement of vehicle speed and acceleration as a function of time, as specified by the driving cycle.


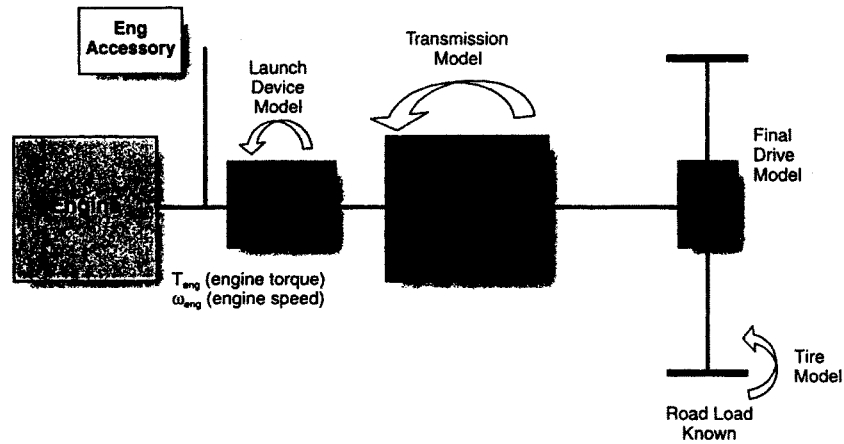


Figure 2-24 Reverse Analysis for Vehicle Duty-Cycle Simulation

All components and subsystems are represented by empirical, quasi-steady-state models and use efficiency maps, loss data, and system-specific parameters (e.g., inertias and ratios) as inputs. These torques and speeds are tracked backwards from the road-load requirement through all the driveline components, allowing researchers to eventually determine the engine torque and speed operating region requirements. The input torque and the speed of each component are calculated as a function of the given output torque and speed, and all torque, speed, and acceleration (inertia)-dependent losses within the component are accounted for in the process. In a similar manner, the electrical input current and voltage requirements are determined from the torque, speed, and acceleration requirements of the electrical components, including their electrical and mechanical losses. At the end of each time step, the torques and speeds are used to determine the energy consumed in each component. HPSP implements the torque and speed approach, rather than the power-requirement-based analysis. The torque and speed approach allows input of detailed component performance maps, providing more accurate predictions, especially at low-load and low-speed conditions.

This simulation approach is ideal for following a duty cycle to determine the engine operating regions under optimum controls of the powertrain or based on specified control and energy management strategies. It is also applicable for a maximum or wide open throttle (WOT) performance analysis to predict maximum vehicle acceleration. For this type of simulation, an iterative solution is required for the reverse-analysis approach, as shown in Figure 2-25.

In this case, the algorithm is driven by a seed value for the vehicle acceleration,  $AccTrial$ , to determine the road load and the same analysis tracking torque and power demands from component to component until the engine operating point is determined. If the engine can provide the torque required, this acceleration value is increased in an iterative procedure until the engine operating limits and the user-specified convergence criteria are met.

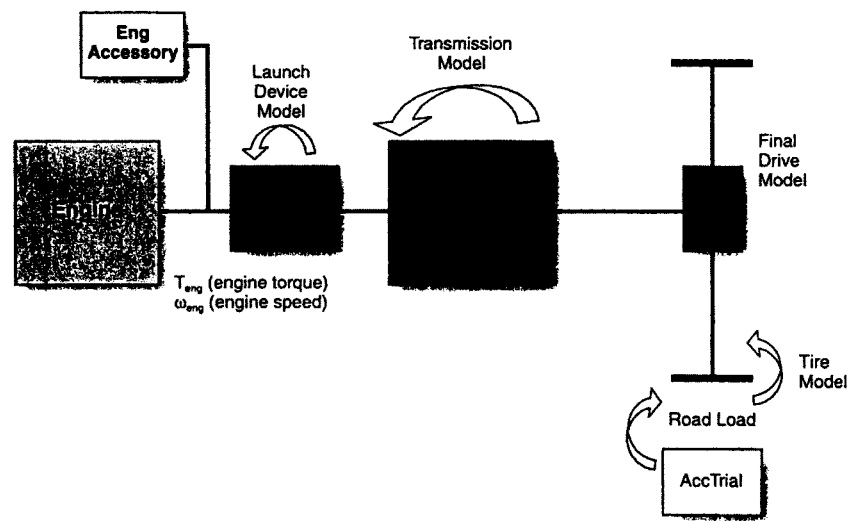

**Figure 2-25 Reverse Analysis for Maximum Performance Simulation**

In contrast to the reverse-driven approach, the forward-driven analysis performs the simulation from the engine throttle position input, following the energy and power flow through the driveline to the tire patch while calculating vehicle velocity and acceleration. With the forward-driven approach, a driving cycle is negotiated by a driver model, which adjusts the engine output to match the duty-cycle vehicle speed requirement. This approach is appropriate to simulate the dynamic behavior of the vehicle and driveline components, identify transients, and analyze responses to powertrain control systems.


In summary, the reverse-driven simulation approach is well suited for the following applications:

- Predicting fuel economy on a prescribed duty cycle,
- Predicting vehicle performance,
- Employing quasi-steady-state empirical models for the system components,
- Determining component sizes and energy management strategies, and

- Sizing components and designing energy management strategies within an optimization loop.

In order to implement an optimization methodology, as mentioned in the last bullet above (for the purpose of changing vehicle design parameters to maximize fuel economy while meeting performance requirements), a numerical algorithm had to be identified and tailored to the problems at hand. This algorithm had to provide a global solution, deal with nonlinear and discontinuous functions, use derivative-free methods, and converge in as few as possible function calls. A number of algorithms were evaluated (Fellini 1998; Fellini et al. 1999; Fellini et al. 2000; Sasena 1998; Weber 2003; Wurster et al. 2004), and the DIRECT method was found to be most appropriate for this application. This method was consistently used to size the components and determine the control system parameters for the hybrid vehicle systems.

In addition to fuel economy and performance, we calculated vehicle efficiency for each of the propulsion systems. The term "efficiency" is defined in Figure 2-26.

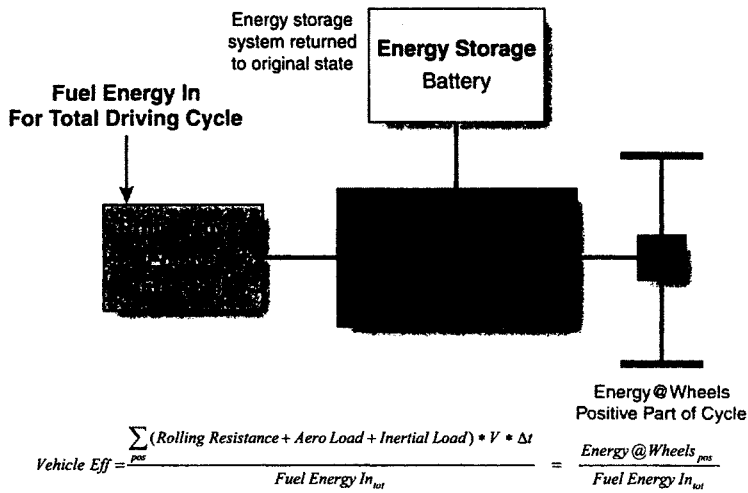


where  $V$  is the vehicle velocity and the  $Fuel\ Energy\ In_{tot}$  includes all powertrain losses and the accessory loads on the engine.

Figure 2-26 Definition of Vehicle Efficiency

2.2.2.2 Vehicle Performance Criteria

The spider chart in Figure 2-27 presents the performance requirements imposed on each vehicle propulsion system designed and evaluated in this study. These requirements were based on current gasoline ICE-equipped vehicles and customer performance expectations for future powertrains. A 7.5-mi zero emission vehicle (ZEV) range (based on the urban driving cycle) was imposed on the hybrid vehicles, assuming that the vehicles could be driven in inner cities without using an engine.

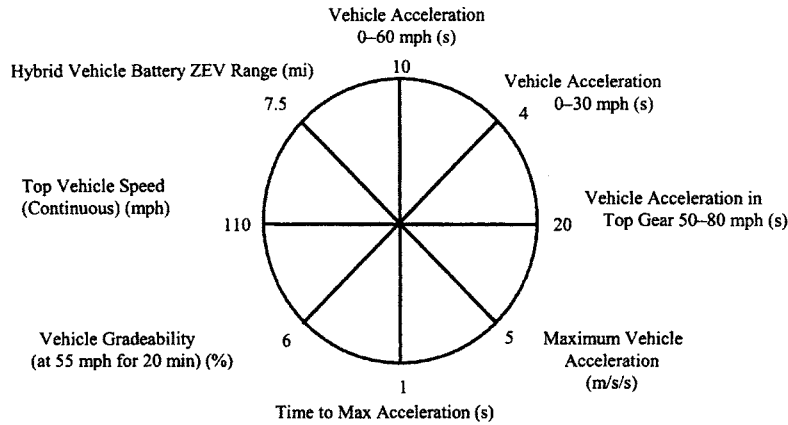

**Figure 2-27 Minimum Vehicle Performance Requirements**

The power sources for each propulsion system were sized in terms of their power, speed, and torque capacities to meet the performance criteria shown in Figure 2-27. The component characteristics also play a crucial role in meeting the criteria shown on the chart. For example, the maximum vehicle acceleration (5 m/s/s) to be reached within 1 s is a strong function of the torque delivered to the wheels, while the top vehicle speed and the acceleration time are dominated by the power capacity and mechanical gearing available in the driveline. Furthermore, the requirement for continuous performance at top vehicle speed precludes engine downsizing, which significantly impacts the fuel economy potential of hybrid vehicles.

The vehicle mass for each concept was adjusted to correct for added or eliminated components. In cases for which such data were not readily available, target component and subsystem mass data were used. The energy management and control strategies were subsequently developed to yield the lowest fuel consumption on the driving cycle and to take advantage of the inherent benefits of the particular powertrain architecture without compromising drive quality. These stringent performance requirements were imposed on the basis of our assumption of mass production of these vehicles rather than niche market applications.

In the absence of such a rigorous approach of including all the performance metrics, researchers could obtain significantly different results and large discrepancies in the quantified potential gains.

**2.2.2.3 Propulsion System Architecture**

The vehicle platform (full-sized truck) selected for the analysis and simulation of the propulsion systems remained unchanged from the Phase 1 study (GM et al. 2001) (see photo). The powertrain technology projected to the 2010 timeframe incorporated the displacement on demand (DOD) engine technology that is mature for high-volume application, as well as assumed improvements in driveline efficiency.




The DOD engine technology allows an eight-cylinder engine to run on four cylinders whenever the driver's power demands can be met using only four cylinders.

All powertrain technologies were characterized by means of component maps based on measured test data and/or realizable targets for efficiency and performance. The assumptions were geared toward maintaining consistency in the efficiency maps and mass when scaling the components for comparison of the technologies. Advanced control strategies with emission considerations such as engine-specific fuel shut-off strategies were implemented with appropriate constraints on vehicle driveability.

#### **2.2.2.3.1 Conventional Drive or Non-Hybrid Vehicles**

The non-hybrid (NH) or conventional drive (CD) powertrains shown in Figure 2-28 consist of an ICE with an automatic torque converter transmission and a standard accessory package, including devices such as power steering and an alternator load. The transmission was shifted to maintain engine response and avoid shift busyness, and the torque converter clutch was engaged at vehicle speeds to maintain drive quality.

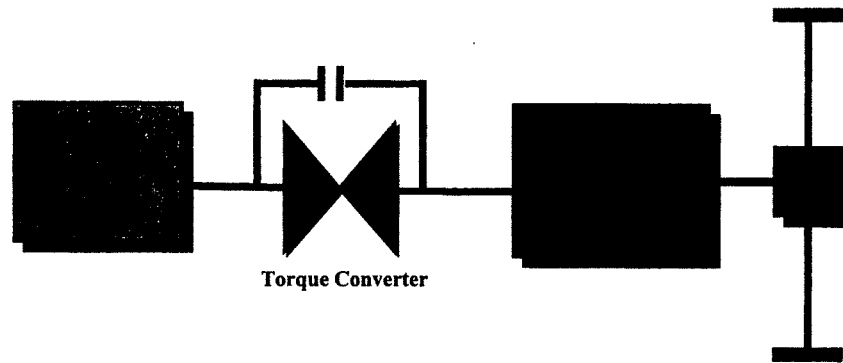


**Figure 2-28 Conventional Drive or Non-Hybrid Powertrain Architecture**

#### **2.2.2.3.2 Hybrid Electric Vehicles**

The hybrid concepts considered in the Phase 2 study were strong-parallel-type architectures that employ advanced electric drives and nickel metal hydride (NiMH) batteries. Strong HEVs, in contrast to mild HEVs, implement higher voltage and higher-power electric components, providing drivers with the ability to launch and drive in the electric mode at low to moderate vehicle speeds.

The Input Power Assist parallel HEV, shown in Figure 2-29 with the electric drive connected at the input to the transmission, was chosen for this study because it represents a hybrid option with the least deviation from the conventional powertrain. As indicated in Section 2.2.2.2, the battery was sized to meet

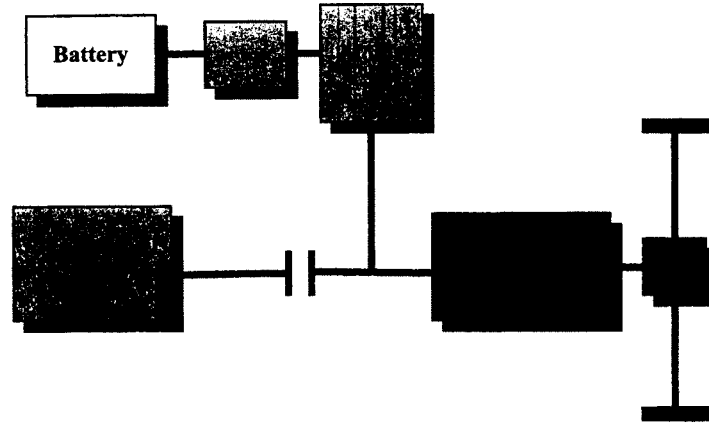

**Figure 2-29 Parallel HEV Architecture**

the 7.5-mi ZEV range, the electric motor was sized to follow the duty-cycle torque and power demands, and a full-size engine was incorporated to meet the sustained top vehicle speed of 110 mph.

The input data for the ICE and transmission were the same as those for the CD concepts. The electric motors and NiMH batteries represent the latest technology-level components, as used in the Precept vehicle that GM developed for the Partnership for a New Generation of Vehicles (PNGV).

The vehicle mass for each HEV concept was adjusted according to the component sizes. Other details, such as charging and discharging efficiency, engine restarting fuel penalty, and accessory loads, were also included to ensure accurate fuel consumption predictions.


Another significant impact on vehicle fuel consumption is the energy management strategy for controlling the powertrain while the vehicle negotiates the driving cycle. A charge-sustaining (CS) strategy, which assures that the battery state-of-charge (SOC) is returned to its initial state at the end of a driving cycle, was assumed for all HEVs. These control strategies also incorporate constraints on engine and motor operation, switching between operating modes, engine ramping rates, and hysteresis effects to avoid transmission shift and engine cycling busyness. The engine operating region was constrained to meet certain criteria for driveability, pleasability, performance, and emissions.

The engine was always turned off at standstill (idle), and the battery was used to launch the vehicle to about 20 mph. At high acceleration demands, the battery launch was cancelled, and the engine and battery were used together to drive the vehicle. To maximize engine efficiency, a load-following control strategy was implemented, and during deceleration or braking periods, the engine was shut off and disconnected from the transmission for maximum recovery of braking energy. At vehicle speeds above 44 mph, the engine remained connected to assure drive quality and performance response.

### 2.2.2.3.3 Fuel Cell and Fuel Processor Systems

The diagram shown in Figure 2-30 presents the model developed to simulate the fuel processor fuel cell systems. This model addresses the various fuel-based reformer systems, as well as the onboard hydrogen storage fuel cell systems with reformers, characterized by their efficiency and power delivery maps. A two-speed gearbox was incorporated between the motor and the final drive to meet the peak acceleration requirement.

The intention of the two-speed gearbox is to provide an underdrive ratio to be used only when maximum vehicle performance is required and in the direct-drive mode during normal duty-cycle operation for fuel economy prediction. This two-speed gearbox is characterized in a manner similar to that used for a conventional transmission in the simulation model.

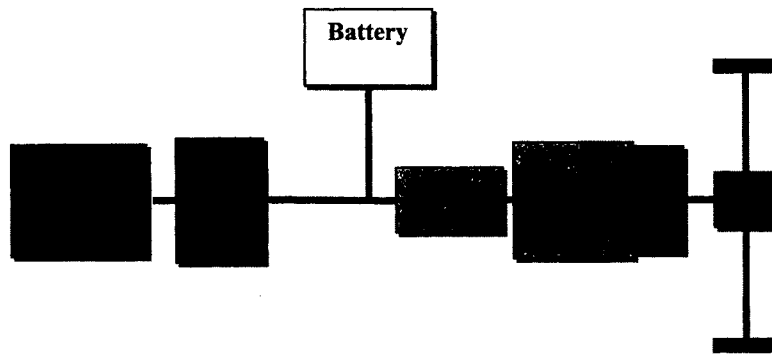

**Figure 2-30 Fuel Cell/Fuel Processor Powertrain Architecture**

Representative efficiency maps for all electric drive components were scaled to meet the vehicle performance requirements to maintain consistency with the other technologies.

### 2.2.2.3.4 Fuel Cell and Fuel Processor Hybrids

For completeness and in order to tap the potential regeneration capability of the electric drives in these concepts, we also assessed the hybridized architectures shown in Figure 2-31.

We determined that the best overall energy management strategy for these concepts was one that would minimize the use of the fuel cell to recharge the battery. Turning the fuel cell system off at standstill and at low power and transferring the accessory loads to the battery at high power allowed the fuel cell system to operate at near-optimum efficiency for most of the cycle without incurring excessive battery and motor losses.

In the case of the onboard hydrogen FCVs, the battery size criterion was not relevant because the FCV is already a ZEV. However, a system optimization in which the overall load is shared between the battery and the fuel cell system yielded further improvements in fuel economy.



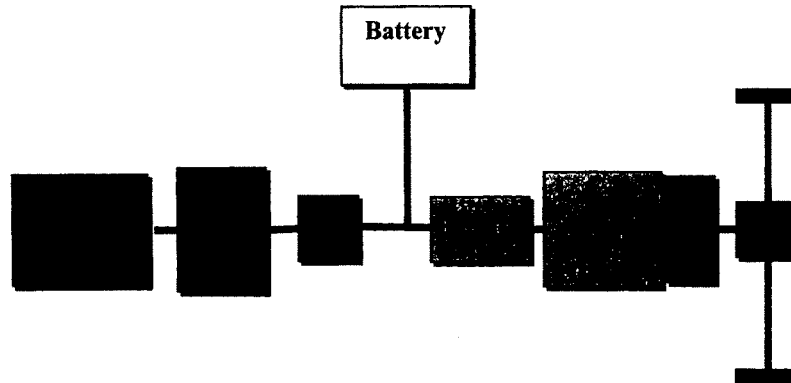


Figure 2-31 Fuel Cell/Fuel Processor HEV Architecture

#### 2.2.2.4 Estimation of Vehicle Criteria Emissions Factors

Tier 2 standards for passenger cars and LDTs up to 8,500 lb GVW were adopted by EPA in 2001 (EPA 2000). These regulations phase in from 2004 through 2009. The Tier 2 standards established a number of “bins,” with separate full-useful-life emission standards, as shown in Table 2-13. The regulations also established a fleet-average  $\text{NO}_x$  standard of 0.07 g/mi, which will gradually be phased in from 2004 to 2009. The fleet-average requirement allows manufacturers to design different vehicles to fit different emission standard bins, as long as the sales-weighted average  $\text{NO}_x$  emissions meet the average  $\text{NO}_x$  standards. The average  $\text{NO}_x$  level coincides with the “Bin 5”  $\text{NO}_x$  emission standard. EPA anticipated that, in the early years of the program, some heavier LDTs and sport utility vehicles (SUVs) would be certified to the higher emission bins, while lighter passenger cars would be certified to the lower bins. When the 0.07  $\text{NO}_x$  average is fully phased in (2009), however, very few vehicle models (especially top-selling models) can be certified to the higher bins, because a fleet having a significant fraction of its vehicles in the higher bins would not meet the 0.07 g/mi.  $\text{NO}_x$  average standard. In implementing the Tier 2 emission standards, EPA also lowered the evaporative emission standards. The evaporative standard for a heavy light-duty truck (EPA’s light-duty truck 3 class) under the Tier 2 requirements is 0.95 g/test, which includes a 3-day diurnal test and a hot soak test.

California also established stringent emissions standards for light-duty vehicles and trucks in its LEV II regulations (California Air Resources Board 1999). The various LEV categories are: low-emission vehicles (LEVs), ultra-low emission vehicles (ULEVs), and super ultra low emission vehicles (SULEVs). These emission categories overlap with the Tier 2 bins, as shown in Table 2-13.

##### 2.2.2.4.1 Assumed Tier 2 Bin Standards for Vehicle Propulsion Systems

For the TTW portion of the study, emissions standards were selected for the various propulsion types to simulate the on-road emissions performance of different vehicle technologies, so that on-road emissions could be evaluated for WTW emission analysis. Table 2-14 shows the emission standards that were assumed for the various propulsion systems.

**Table 2-13 Tier 2 Full-Useful-Life Exhaust Emission Standards (g/mi)**

Bin	NO <sub>x</sub>	NMOG <sup>a</sup>	CO	HCHO <sup>a</sup>	PM	Equivalent California LEV II NO <sub>x</sub> Standard
8	0.20	0.125	4.2	0.018	0.02	None
7	0.15	0.090	4.2	0.018	0.02	None
6	0.10	0.090	4.2	0.018	0.01	None
5	0.07	0.090	4.2	0.018	0.01	LEV
4	0.04	0.070	2.1	0.011	0.01	ULEV
3	0.03	0.055	2.1	0.011	0.01	None
2	0.02	0.010	2.1	0.004	0.01	SULEV
1	0.00	0.000	0.0	0.000	0.00	ZEV

<sup>a</sup> NMOG = non-methane organic gas; HCHO = formaldehyde.

**Table 2-14 Emission Standards Assumed for Hybrid and Non-Hybrid Propulsion Systems**

Propulsion System	Tier 2 Exhaust Emissions Bin			Evaporative	Tire and Brake Wear
	VOC and CO	NO <sub>x</sub>	PM	VOC	PM
Gasoline DOD SI engine	Bin 5	Bin 5	Bin 5	Tier 2 Evap	Bin 5/2/1
Gasoline DI SI engine	Bin 5	Bin 5	Bin 5	Tier 2 Evap	Bin 5/2/1
Diesel DI CI engine	Bin 5	Bin 5	Bin 5	Zero	Bin 5/2/1
E85 flexible-fuel DOD SI engine	Bin 5	Bin 5	Bin 5	Tier 2 Evap	Bin 5/2/1
CNG DOD SI engine	Bin 5	Bin 5	Bin 5	Zero	Bin 5/2/1
Hydrogen DOD SI engine	Bin 2	Bin 5/2	Bin 2	Zero	Bin 5/2/1
Gasoline/naphtha FP fuel cell	Bin 2	Bin 2	Bin 2	Tier 2 Evap	Bin 5/2/1
Methanol FP fuel cell	Bin 2	Bin 2	Bin 2	Tier 2 Evap	Bin 5/2/1
Ethanol FP fuel cell	Bin 2	Bin 2	Bin 2	Tier 2 Evap	Bin 5/2/1
Hydrogen fuel cell	Bin 1	Bin 1	Bin 1	Zero	Bin 5/2/1

Bin 5 (LEV) was selected for all exhaust emissions for the gasoline SI systems because Bin 5 matches the average Tier 2 NO<sub>x</sub> emission standard. As indicated above, we maintained comparable vehicle performance requirements for all propulsion systems; therefore, standards for all of the propulsion systems were required to be at Bin 5 or lower. Meeting Bin 5 NO<sub>x</sub> and PM standards will be most challenging for the diesel propulsion system. On the other hand, diesel vehicles have the advantage of not having evaporative VOC emissions.

Some propulsion systems have inherent emissions advantages compared with the baseline gasoline system. For example, the engine-out emissions of hybrid systems tend to be somewhat lower because engine-out emissions tend to scale with fuel consumption. However, this advantage is offset by the need for more frequent starts, so all hybrid systems were assumed to meet the same standards as their conventional drive counterparts. Besides generating zero evaporative VOC emissions, CNG may also have other inherent emissions advantages relative to gasoline, but we also assumed Bin 5 for CNG, reasoning that the advantage of CNG will be smaller at the very low Tier 2 standards and can be offset by using a less costly aftertreatment system.

The hydrogen SI engine will inherently have substantially lower VOC, CO, and PM emissions than the gasoline SI engine, because hydrogen fuel does not contain carbon. Because of lubricant combustion, however, VOC, CO, and PM emissions will not be zero, so we assumed Bin 2. For production of a full-size truck fleet, which is the basis of this study, it is appropriate to assume a less-costly Bin 5 NO<sub>x</sub> emissions system for hydrogen SI vehicles. NO<sub>x</sub> emissions can be quite low when hydrogen SI engines are operated under lean conditions and at low loads, but they are similar to gasoline NO<sub>x</sub> emissions when the engine is operated near peak power (Natkin et al. 2003). Emission control systems are available to allow full certification of hydrogen SI engines at the Bin 2 level. Automobile makers might use this strategy to sell hydrogen SI engines in a niche application and to earn partial ZEV credits in California. For this reason, we established another case in which hydrogen SI engines meet the Bin 2 NO<sub>x</sub> standard. Hydrogen internal combustion-engine-powered vehicles do not have evaporative VOC emissions.

The fuel processor fuel cell systems will produce emissions that are inherently lower than those of an ICE vehicle, but these emissions would not be zero. Bin 2 exhaust emissions were assumed for these fuel processor systems. The hydrogen fuel cell system will not emit any of the regulated pollutants, so Bin 1 (ZEV) exhaust emissions were assumed.

All of the propulsion systems using volatile liquid fuels (gasoline, methanol, and ethanol) were assumed to meet the Tier 2 evaporative standard. All other vehicles (hydrogen, CNG, and diesel) are assumed to have zero evaporative emissions.

Table 2-14 also lists assumptions for PM emissions caused by brake and tire wear. Such wear is independent of the certification emissions bin and of the propulsion system technology. We have shown this in Table 2-14 by indicating Bin 5/2/1 for tire and brake wear-related PM emissions for all vehicles. One could argue that PM emissions caused by brake wear could be reduced by using hybrid configurations because of braking energy recovery or that emissions caused by tire wear could be affected by changes in vehicle weight. However, we expect that such changes in PM emissions caused by brake and tire wear would be small.

#### **2.2.2.4.2 On-Road Vehicle Emission Modeling**

On-road emissions (VOC, CO, NO<sub>x</sub>, and PM<sub>10</sub>) for Bin 5 and Bin 2 vehicles were estimated by using both the MOBILE6.2 model (EPA 2003) and the EMFAC2002 model (CARB 2004). The modeling of emissions in this study could have been performed by using only one of the models, but the two available models produce quite different results for the same vehicle technology. Choosing only one of the models to make these estimates would have required an arbitrary decision. Further discussion of the models and methods used is provided below.

MOBILE6.2 allows the user to input Tier 2 bin phase-in fractions. The Tier 2 bin fractions were set to either 100% Bin 5 (LEVs) or 100% Bin 2 (SULEVs) for light-duty truck class 3 vehicles. Our WTW study is based on the lifetime emissions of a 2010-MY truck. The TTW emissions analysis was run assuming calendar year (CY) 2016 — the lifetime mileage midpoint of a 2010-MY truck. In 2016, the model indicates that 2010-MY LDTs will have accumulated about 85,000 mi. Exhaust PM<sub>10</sub>, brake wear PM<sub>10</sub>, and tire wear PM<sub>10</sub> were also evaluated by using MOBILE6.2. The modeling effort assumed an onboard diagnostic (OBD) system, an inspection and maintenance (I&M) program, reformulated gasoline, a fuel Reid vapor pressure (RPV) of 6.8 psi, and diurnal temperatures of 72°F to 92°F.

For EMFAC, the technology fractions were again set to either 100% LEVs or 100% SULEVs, and the model was run in 2016 for the South Coast Air Basin to simulate the mid-point emissions performance of a 2010-MY vehicle.

Modeling results for VOCs, CO, and NO<sub>x</sub> are listed in Table 2-15. Emission rates (in g/mi) generated by the MOBILE6.2 model for both Bin 5 and Bin 2 vehicles are much higher than those generated by EMFAC. EMFAC emission rates for exhaust VOCs, CO, and NO<sub>x</sub> are typically less than 20% of the MOBILE6.2 emission rates. Evaporative VOC rates for EMFAC are about 50% of the MOBILE6.2 emission rates. Although there is a difference in CO standards between Bin 2 and SULEV (the Bin 2 CO standard is 2.1 g/mi; the SULEVII standard is 1.0 g/mi), we do not believe that this is the primary reason for the difference in the modeled CO emissions.

There are many differences between the two models that may cause the differences in simulated emissions:

- Mileage accumulation rates,
- Registration distributions,
- Speed correction factors and in-use speed distributions,
- Methods for calculating deterioration emission rates and the effects of I/M programs and OBD systems on in-use emissions, and
- Fuel correction factors.

While all of these factors would contribute to differences in the two models, it is our view that the major difference between the model predictions for these vehicles is attributable to different assumptions concerning the emission deterioration of these vehicles over the life of vehicles.

Table 2-16 shows PM<sub>10</sub> emission factors from both models. In this comparison, the EMFAC PM<sub>10</sub> exhaust emission rates are higher than those generated by MOBILE6.2, EMFAC brake wear emissions are lower, and tire wear emissions from the two models are about the same. Overall, EMFAC PM emission rates for both Bin 5 and Bin 2 vehicles are 75% higher than MOBILE6.2 rates. This is because the EMFAC model incorporates a modest amount of deterioration in exhaust PM, whereas the MOBILE6.2 model assumes that there is no deterioration in exhaust PM for gasoline vehicles. Although Bin 1 was not modeled, Table 2-16 shows our PM assumptions for Bin 1 — zero PM exhaust emissions but brake and tire PM emissions equal to those of Bin 5 and Bin 2.

**Table 2-15 Emission Results of 2010-MY Bin 5 and Bin 2 Light-Duty Truck 3 Vehicles in CY 2016 Generated by MOBILE6.2 and EMFAC2002 (in g/mi)**

Technology	Model	Exhaust VOC	Evaporative VOC	CO	NO <sub>x</sub>
Bin 5	EMFAC (LEV)	0.0339	0.0590	1.278	0.068
	MOBILE6.2	0.2283	0.1187	9.226	0.353
Bin 2	EMFAC (SULEV)	0.0085	0.0590	0.474	0.034
	MOBILE6.2	0.1439	0.1187	6.168	0.294

**Table 2-16 PM<sub>10</sub> Emissions of 2010-MY Bin 5 and Bin 2 Gasoline Light-Duty Truck 3 Vehicles in CY 2016 Generated by MOBILE6.2 and EMFAC2002 (g/mi)**

Technology	Model	Exhaust PM <sub>10</sub>	Brake Wear PM <sub>10</sub>	Tire Wear PM <sub>10</sub>	Total PM <sub>10</sub>
Bin 5 (LEV)	EMFAC	0.0254	0.0085	0.0085	0.0424
	MOBILE6.2	0.0037	0.0125	0.0080	0.0242
Bin 2 (SULEV)	EMFAC	0.0254	0.0085	0.0085	0.0424
	MOBILE6.2	0.0037	0.0125	0.0080	0.0242
Bin 1 (ZEV)	EMFAC	0.0000	0.0085	0.0085	0.0170
	MOBILE6.2	0.0000	0.0125	0.0080	0.0205

#### 2.2.2.4.3 Establishment of Emission Distribution Functions with MOBILE and EMFAC Results

By using the on-road vehicular emissions generated by MOBILE6.2 and EMFAC, we developed probability distribution functions for each pollutant and vehicle technology. The distributions were based on emission levels estimated with MOBILE6.2 and EMFAC, future trends of on-road vehicle emission performance, the type of emission control systems installed, efforts to control on-road emissions (such as implementation of the I&M programs and the OBD II systems), and durability requirements for emission controls, among other factors.

We developed the distribution functions for TTW emissions using the gamma function and Crystal Ball™ software. In all cases, except for PM<sub>10</sub> exhaust emissions, we used EMFAC-estimated emission values as P10 values (10% probability that emissions will be below this value) and MOBILE6.2-estimated values as P90 values (90% probability that emissions will be below this value). MOBILE6.2 estimates are based on an in-use deterioration rate that, in our judgment, is too high for the bulk of the population of future vehicles, which will all be equipped with sophisticated OBD systems. We believe that the emission performance of future vehicles will be closer to EMFAC-estimated values than to MOBILE-estimated values. Thus, we assigned P50 values (50% probability that emissions will be below this value) closer to P10 values. On the basis of these assumptions, we used the Crystal Ball™ software to develop probability distribution functions in Microsoft Excel. The functions we developed were eventually used in our WTW emissions simulations. An example distribution for TTW propulsion systems meeting Bin 5 NO<sub>x</sub> emissions is shown in Figure 2-32.

Refueling emissions were also added to the evaporative emission rates. Refueling emissions are not estimated in EMFAC (they are considered part of the area source inventory), but they are estimated in MOBILE6.2. All vehicles would have onboard refueling vapor recovery (ORVR) systems; MOBILE6.2 estimates refueling emissions from vehicles equipped with ORVR systems at 0.02 g/mi. The refueling estimate of 0.02 g/mi was therefore added to the evaporative emissions. Table 2-17 shows the parameters for gamma distribution functions we established for vehicular emissions for all emission components.

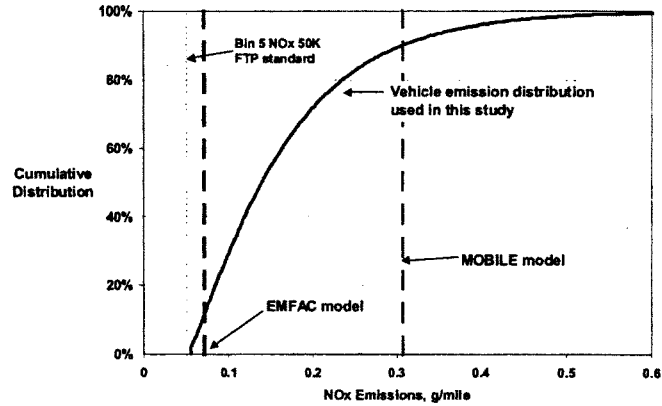


Figure 2-32 Emissions Distribution Function for Bin 5 Vehicle NO<sub>x</sub> Emissions

Table 2-17 Parameters of Vehicular Emission Distributions Based on Gamma Distribution Function

Vehicle Type and Pollutant	Emissions (g/mi)		
	P10	P50	P90
Gasoline DOD SI CD, Gasoline SI DI CD, E85 DOD SI CD, Gasoline DOD SI HEV, Gasoline SI DI HEV, and E85 DOD SI HEV (Bin 5)			
Exhaust VOC	0.0339	0.0950	0.2283
Evaporative and refueling VOCs	0.0590	0.0790	0.1187
Exhaust CO	1.2778	3.9000	9.2262
Exhaust NO <sub>x</sub>	0.0677	0.1540	0.3534
Exhaust PM <sub>10</sub>	0.0037	0.0104	0.0254
Brake and tire wear PM <sub>10</sub> <sup>a</sup>	Not available	0.0188	Not available
Diesel CI DI CD, CNG DOD SI CD, Diesel CI DI HEV, and CNG DOD SI HEV (Bin 5)			
Exhaust VOC	0.0339	0.0950	0.2283
Evaporative and refueling VOCs	Not needed	0.0000	Not needed
Exhaust CO	1.2778	3.9000	9.2262
Exhaust NO <sub>x</sub>	0.0677	0.1540	0.3534
Exhaust PM <sub>10</sub>	0.0037	0.0104	0.0254
Brake and tire wear PM <sub>10</sub> <sup>a</sup>	Not available	0.0188	Not available

Table 2-17 (Cont.)

Vehicle Type and Pollutant	Emissions (g/mi)		
	P10	P50	P90
<b>H<sub>2</sub> DOD SI CD and HEV (Bin 5/Bin2)<sup>b</sup></b>			
Exhaust VOC	0.0085	0.0654	0.1439
Evaporative and refueling VOCs	Not needed	0.0000	Not needed
Exhaust CO	0.4739	2.3000	6.1685
Exhaust NO <sub>x</sub>	0.0677/0.0339	0.1540/0.1100	0.3534/0.2936
Exhaust PM <sub>10</sub>	0.0037	0.0104	0.0254
Brake and tire wear PM <sub>10</sub> <sup>a</sup>	Not available	0.0188	Not available
<b>Gasoline, Methanol, and Ethanol FCV (Bin 2)</b>			
Exhaust VOC	0.0085	0.0654	0.1439
Evaporative and refueling VOCs	0.0590	0.0790	0.1187
Exhaust CO	0.4739	2.3000	6.1685
Exhaust NO <sub>x</sub>	0.0339	0.1100	0.2936
Exhaust PM <sub>10</sub>	0.0037	0.0104	0.0254
Brake and tire wear PM <sub>10</sub> <sup>a</sup>	Not available	0.0188	Not available
<b>H<sub>2</sub> FCV (Bin 1)</b>			
Exhaust VOC	Not needed	0.0000	Not needed
Evaporative and refueling VOCs	Not needed	0.0000	Not needed
Exhaust CO	Not needed	0.0000	Not needed
Exhaust NO <sub>x</sub>	Not needed	0.0000	Not needed
Exhaust PM <sub>10</sub>	Not needed	0.0000	Not needed
Brake and tire wear PM <sub>10</sub> <sup>a</sup>	Not needed	0.0188	Not needed

<sup>a</sup> For brake and tire wear PM<sub>10</sub> emissions, no distribution function was established. Instead, the P50 value (point estimate) was used in our simulations.

<sup>b</sup> For H<sub>2</sub> SI DOD CD and HEV, besides the case that they meet Bin 5 NO<sub>x</sub> standard, another case that they meet Bin 2 NO<sub>x</sub> standard was simulated in our study.

#### 2.2.2.4.4 Non-CO<sub>2</sub> GHG Emissions Factors

The models used for TTW criteria pollutant emissions, MOBILE and EMFAC, do not include the non-CO<sub>2</sub> GHG emissions of CH<sub>4</sub> and N<sub>2</sub>O. Therefore, we estimated these as point estimates based on available data. Table 2-18 lists the factors used in this study. The factors for CH<sub>4</sub> were based on available GM vehicle emissions testing data for gasoline, diesel, E85, and CNG. The N<sub>2</sub>O factors were based on an EPA publication (Michaels 1998) and previous versions of GREET.

### 2.3 Well-to-Wheels Vehicle/Fuel Systems

One hundred twenty-four WTW pathways were analyzed in this study, representing nearly all potential combinations of WTT fuel pathways and TTW vehicle propulsion systems. These included 47 different fuel pathway/powertrain combinations, 45 of which were analyzed with both non-hybrid and hybrid architectures. Ten pathways use crude-oil-derived fuels in ICEs and fuel processor fuel cell propulsion systems. Twenty-six pathways involved NA NG; 32 were based on NNA NG. Eight pathways were based on biofuels and 49 on electrolysis-derived hydrogen. The pathways and notations used are listed in Table 2-19.

**Table 2-18 Assumed Vehicular Emissions Factors for CH<sub>4</sub> and N<sub>2</sub>O**

Vehicle Type	Emissions, g/mi	
	CH <sub>4</sub>	N <sub>2</sub> O
Gasoline DOD SI CD and HEV	0.0068	0.0280
Gasoline DI SI CD and HEV	0.0068	0.0280
Diesel DI CI CD and HEV	0.0068	0.0280
E85 DOD SI CD and HEV	0.0068	0.0280
CNG DOD SI CD and HEV	0.3000	0.0140
H <sub>2</sub> DOD SI CD and HEV	0.0065	0.0280
Gasoline FP FCV and FC HEV	0.2000	0.0056
MeOH FP FCV and FC HEV	0.0020	0.0056
EtOH FP FCV and FC HEV	0.2000	0.0056
H <sub>2</sub> FCV and FC HEV	0.0000	0.0000

**Table 2-19 WTW Vehicle/Fuel Systems and Notation Used in this Report**

Pathways	Conventional Drive	Hybrid Electric
<b>Petroleum-Based Pathways</b>		
Reformulated gasoline (30-ppm-S) displacement-on-demand spark-ignition	RFG DOD SI CD	RFG DOD SI HEV
Reformulated gasoline (10-ppm-S) direct-injection spark-ignition	RFG DI SI CD	RFG DI SI HEV
Diesel (15-ppm-S) direct-injection compression-ignition	LS Diesel DI CI CD	LS Diesel DI CI HEV
Gasoline (5-ppm-S) fuel processor fuel cell	Gasoline FP FCV	Gasoline FP FC HEV
Crude oil naphtha fuel processor fuel cell	Crude Naph. FP FCV	Crude Naph. FP FC HEV
<b>NA NG Pathways</b>		
Compressed NG displacement-on-demand spark-ignition	NA NG CNG DOD SI CD	NA NG CNG DOD SI HEV
Gaseous hydrogen (central) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NA NG Central GH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NA NG Central GH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
	NA NG Central GH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NA NG Central GH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Gaseous hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NA NG Station GH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NA NG Station GH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
	NA NG Station GH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NA NG Station GH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Liquid hydrogen (central) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NA NG Central LH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NA NG Central LH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
	NA NG Central LH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NA NG Central LH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>



Table 2-19 (Cont.)

Pathways	Conventional Drive	Hybrid Electric
<b>NA NG Pathways (Cont.)</b>		
Liquid hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NA NG Station LH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NA NG Station LH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
Gaseous hydrogen (central) fuel cell	NA NG Station LH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NA NG Station LH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Gaseous hydrogen (station) fuel cell	NA NG Central GH <sub>2</sub> FCV	NA NG Central GH <sub>2</sub> FC HEV
Liquid hydrogen (central) fuel cell	NA NG Station GH <sub>2</sub> FCV	NA NG Station GH <sub>2</sub> FC HEV
Liquid hydrogen (station) fuel cell	NA NG Central LH <sub>2</sub> FCV	NA NG Central LH <sub>2</sub> FC HEV
Liquid hydrogen (station) fuel cell	NA NG Station LH <sub>2</sub> FCV	NA NG Station LH <sub>2</sub> FC HEV
<b>NNA NG Pathways</b>		
Compressed NG displacement-on-demand spark-ignition	NNA NG CNG DOD SI CD	NNA NG CNG DOD SI HEV
Fischer-Tropsch diesel direct-injection compression-ignition	NNA NG FT Diesel DI CI CD	NNA NG FT Diesel DI CI HEV
Gaseous hydrogen (central) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Central GH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NNA NG Central GH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
Gaseous hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Central GH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NNA NG Central GH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Liquid hydrogen (central) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Station GH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NNA NG Station GH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
Liquid hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Station GH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NNA NG Station GH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Liquid hydrogen (central) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Central LH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NNA NG Central LH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
Liquid hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Central LH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NNA NG Central LH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Liquid hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Station LH <sub>2</sub> DOD SI CD: Bin 5 NO <sub>x</sub>	NNA NG Station LH <sub>2</sub> DOD SI HEV: Bin 5 NO <sub>x</sub>
Liquid hydrogen (station) displacement-on-demand spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	NNA NG Station LH <sub>2</sub> DOD SI CD: Bin 2 NO <sub>x</sub>	NNA NG Station LH <sub>2</sub> DOD SI HEV: Bin 2 NO <sub>x</sub>
Gaseous hydrogen (central) fuel cell	NNA NG Central GH <sub>2</sub> FCV	NNA NG Central GH <sub>2</sub> FC HEV
Gaseous hydrogen (station) fuel cell	NNA NG Station GH <sub>2</sub> FCV	NNA NG Station GH <sub>2</sub> FC HEV
Liquid hydrogen (central) fuel cell	NNA NG Central LH <sub>2</sub> FCV	NNA NG Central LH <sub>2</sub> FC HEV
Liquid hydrogen (station) fuel cell	NNA NG Station LH <sub>2</sub> FCV	NNA NG Station LH <sub>2</sub> FC HEV
Methanol fuel processor fuel cell	NNA NG MeOH FP FCV	NNA NG MeOH FC HEV
Fischer-Tropsch naphtha fuel processor fuel cell	NNA NG FT Naph. FP FCV	NNA NG FT Naph. FP FC HEV

Table 2-19 (Cont.)

Pathways	Conventional Drive	Hybrid Electric
<b>Renewable and Electricity Pathways</b>		
Corn 85% ethanol spark-ignition flexible-fuel displacement-on-demand	Corn E85 DOD SI CD	Not included
Cellulosic 85% ethanol spark-ignition flexible-fuel displacement-on-demand	Cell. E85 DOD SI CD	Cell. E85 DOD SI HEV
Corn ethanol fuel processor fuel cell	Corn EtOH FP FCV	Corn EtOH FP FC HEV
Cellulosic ethanol fuel processor fuel cell	Cell. EtOH FP FCV	Cell. EtOH FP FC HEV
U.S. mix electrolysis gaseous hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 5 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 5 NO <sub>x</sub>
	Electro. GH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 2 NO <sub>x</sub>
CA mix electrolysis gaseous hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI CD: CA kWh, Bin 5 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: CA kWh, Bin 5 NO <sub>x</sub>
	Electro. GH <sub>2</sub> DOD SI CD: CA kWh, Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: CA kWh, Bin 2 NO <sub>x</sub>
NA NG combined-cycle electrolysis gaseous hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI CD: NA NG CC kWh, Bin 5 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: NA NG CC kWh, Bin 5 NO <sub>x</sub>
	Electro. GH <sub>2</sub> DOD SI CD: NA NG CC kWh, Bin 2 NO <sub>x</sub>	Electro. GH <sub>2</sub> DOD SI HEV: NA NG CC kWh, Bin 2 NO <sub>x</sub>
U.S. mix electrolysis liquid hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 5 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 5 NO <sub>x</sub>
	Electro. LH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 2 NO <sub>x</sub>
CA mix electrolysis liquid hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI CD: CA kWh, Bin 5 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: CA kWh, Bin 5 NO <sub>x</sub>
	Electro. LH <sub>2</sub> DOD SI CD: CA kWh, Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: CA kWh, Bin 2 NO <sub>x</sub>
NA NG combined-cycle electrolysis liquid hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI CD: NA NG CC kWh, Bin 5 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: NA NG CC kWh, Bin 5 NO <sub>x</sub>
	Electro. LH <sub>2</sub> DOD SI CD: NA NG CC kWh, Bin 2 NO <sub>x</sub>	Electro. LH <sub>2</sub> DOD SI HEV: NA NG CC kWh, Bin 2 NO <sub>x</sub>
U.S. mix electrolysis gaseous hydrogen fuel cell	Electro. GH <sub>2</sub> FCV: U.S. kWh	Electro. GH <sub>2</sub> FC HEV: U.S. kWh
CA mix electrolysis gaseous hydrogen fuel cell	Electro. GH <sub>2</sub> FCV: CA kWh	Electro. GH <sub>2</sub> FC HEV: CA kWh
NG combined-cycle electrolysis gaseous hydrogen fuel cell	Electro. GH <sub>2</sub> FCV: NA NG CC kWh	Electro. GH <sub>2</sub> FC HEV: NA NG CC kWh
U.S. mix electrolysis liquid hydrogen fuel cell	Electro. LH <sub>2</sub> FCV: U.S. kWh	Electro. LH <sub>2</sub> FC HEV: U.S. kWh
CA mix electrolysis liquid hydrogen fuel cell	Electro. LH <sub>2</sub> FCV: CA kWh	Electro. LH <sub>2</sub> FC HEV: CA kWh

Table 2-19 (Cont.)

Pathways	Conventional Drive	Hybrid Electric
<b>Renewable and Electricity Pathways (Cont.)</b>		
NG combined-cycle electrolysis liquid hydrogen fuel cell	Electro LH <sub>2</sub> FCV: NA NG CC kWh	Electro LH <sub>2</sub> FC HEV: NA NG CC kWh
Electrolysis renewable electricity gaseous hydrogen FCV	Electro. GH <sub>2</sub> FCV: Renew. kWh	Not included
U.S. mix electrolysis gaseous hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub> adopted IAQR	Electro. GH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 5 NO <sub>x</sub> , adopted IAQR	Electro. GH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 5 NO <sub>x</sub> , adopted IAQR
	Electro. GH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 2 NO <sub>x</sub> , adopted IAQR	Electro. GH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 2 NO <sub>x</sub> , adopted IAQR
U.S. mix electrolysis gaseous hydrogen fuel cell adopted IAQR	Electro. GH <sub>2</sub> FCV: U.S. kWh, adopted IAQR	Electro. GH <sub>2</sub> FC HEV: U.S. kWh, adopted IAQR
U.S. mix electrolysis liquid hydrogen spark-ignition Bin 5 and Bin 2 NO <sub>x</sub> adopted IAQR	Electro. LH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 5 NO <sub>x</sub> , adopted IAQR	Electro. LH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 5 NO <sub>x</sub> , adopted IAQR
	Electro. LH <sub>2</sub> DOD SI CD: U.S. kWh, Bin 2 NO <sub>x</sub> , adopted IAQR	Electro. LH <sub>2</sub> DOD SI HEV: U.S. kWh, Bin 2 NO <sub>x</sub> , adopted IAQR
U.S. mix electrolysis liquid hydrogen fuel cell adopted IAQR	Electro. LH <sub>2</sub> FCV: U.S. kWh, adopted IAQR	Electro. LH <sub>2</sub> FC HEV: U.S. kWh, adopted IAQR

### 3. TANK-TO-WHEELS SIMULATED FUEL ECONOMY AND PERFORMANCE RESULTS

The methodology described in Section 2 was consistently implemented in designing each of the technologies using validated component models and input data and assumptions reflecting realistic vehicle operating constraints. Outputs of this study, summarized in the following tables, include vehicle fuel economy and acceleration performance predictions. The tables include the fuel economy in gasoline-equivalent mpg on the EPA urban and highway driving cycles, and the 0–60 mph acceleration performance time. Also included are urban/highway composite vehicle fuel economy and efficiencies, as defined in Figure 2-26, and the percent gain in fuel economy of each concept over the baseline vehicle.

The fuel economy predictions for the baseline vehicle on the urban and highway driving cycles are within the range of the EPA published ratings for a truck in the 4,750-lb test weight class.

The vehicle mass for each of the technologies was adjusted by the scale factors used for sizing the components. Thus, without disclosing specific proprietary component mass information, increases in test weight classes for the advanced technologies range (from the best- to the worst-case scenarios) from ~3% to 20% for the fuel cell systems with onboard hydrogen storage and between ~10% and 30% for the reformer vehicles. The hybrid powertrain systems increase mass from 0% and 10% for ICE parallel HEVs (0% meaning that the mass of an ICE HEV would not change relative to that of a conventional vehicle), from ~7% and 24% for fuel cell HEVs, and from ~16% and 34% for the reformer HEVs.

#### 3.1 Fuel Economy and Performance Results

Tables 3-1 and 3-2 present the results for the conventional drive and the hybridized ICE propulsion systems. All fuel economies are reported as mpg of gasoline-equivalent energy (115,500 Btu/gal gasoline equivalent).

The baseline vehicle with a DOD engine demonstrated a composite fuel economy gain of ~5% over the 20.2-mpg fuel economy of the baseline technology estimated in the Phase 1 study. On the basis of GM data indicating that an ICE running on E85 operates at the same engine efficiency as its equivalent gasoline ICE, the E85 fuel economy (mpg gasoline equivalent) was equal to that for gasoline. A similar

**Table 3-1 Best-Estimate Vehicle Fuel Economy Results for ICE CD Propulsion Systems**

Propulsion System	Fuel Economy, mpg gasoline equivalent				0–60 mph Acceleration Time, s	Vehicle Efficiency, %
	Urban	Highway	Composite	Change, %		
Gasoline DOD SI CD Baseline <sup>a</sup>	18.5	26.2	21.3	—	7.9	17.7
Gasoline DI SI CD	21.5	28.7	24.2	14	7.9	20.6
Diesel DI CI CD	22.7	30.9	25.8	21	7.9	21.1
E85 DOD SI CD	18.5	26.2	21.3	0	7.9	17.7
CNG DOD SI CD	18.1	25.9	21.0	-1	8.2	17.9
H <sub>2</sub> DOD SI CD	22.5	31.5	25.6	21	7.9 s	21.3

<sup>a</sup> The fuel economy of the Phase 1 baseline technology (without DOD) was 20.2 mpg composite.

**Table 3.2 Best-Estimate Vehicle Fuel Economy and Performance Results for ICE Parallel HEV Propulsion Systems with Charge-Sustaining Control Strategy**

Propulsion System (see)	Fuel Economy, mpg gasoline equivalent				0–60 mph Acceleration Time, s	Vehicle Efficiency, %
	Urban	Highway	Composite	Change, %		
Gasoline DOD SI Baseline	18.5	26.2	21.3	—	7.9	18
Gasoline DOD SI HEV	25.9	27.2	26.5	24	6.2 <sup>a</sup> – 8.0 <sup>b</sup>	23
Gasoline DI SI HEV	29.2	29.3	29.2	37	6.2 <sup>a</sup> – 8.0 <sup>b</sup>	26
Diesel DI CI HEV	30.7	31.1	30.8	45	6.2 <sup>a</sup> – 8.0 <sup>b</sup>	26
E85 DOD SI HEV	25.9	27.2	26.5	24	6.2 <sup>a</sup> – 8.0 <sup>b</sup>	23
CNG DOD SI HEV	24.8	26.2	25.4	19	6.5 <sup>a</sup> – 8.2 <sup>b</sup>	23
H <sub>2</sub> DOD SI HEV	30.6	32.9	31.6	48	6.3 <sup>a</sup> – 8.0 <sup>b</sup>	27

<sup>a</sup> Fully charged battery.

<sup>b</sup> Fully discharged battery.

assumption regarding engine efficiency was also made for the dual-fuel CNG ICE. However, in order to maintain the same vehicle driving range as the baseline vehicle, the size of the fuel tank was increased, which imposed a penalty on vehicle mass and had a minor deleterious effect on fuel economy.

The DI SI gasoline engine was optimized over its stratified and homogeneous operating regions, while meeting emission requirements, resulting in a potential fuel economy gain of 14%. The DI diesel engine was scaled (4.7 L engine displacement) to meet the same top vehicle speed, resulting in a 21% gain in fuel economy on a gasoline-equivalent basis.

An efficiency map of the ICE running on hydrogen was not as readily available as maps for the other technologies and was thus created on the basis of information available in the literature. With the operating conditions optimized, increased compression ratio and the engine operating at steady state, theoretical thermal efficiency approaches 50% (Natkin et al. 2002; Eichlleder et al. 2003). However, when accounting for friction, heat, and pumping losses, as well as partial-load operation on the duty cycle, the brake thermal efficiency of our modeled engine yielded an estimated 5 percentage points higher efficiency than the same engine operating on gasoline. However, because of the low volumetric efficiency and combustion limitations, the maximum power of hydrogen engines is substantially lower than that of gasoline engines. Our simulation of hydrogen engine technology, based on estimated engine efficiency and scaling of engine power to meet the vehicle performance requirements, yielded about a 21% gain in gasoline-equivalent fuel economy.

The benefits attributable to hybridizing these engine technologies, under the control strategy assumption presented above, resulted in significant fuel economy gains while maintaining vehicle performance. These control strategies were tailored to each engine technology to take maximum advantage of the synergies between the hybrid architecture and the engine characteristics. The results show that, as the efficiency of the powertrain increases, the magnitude of the benefit attributable to hybridization decreases. In particular, benefits of hybridization are reduced for engine technologies with high efficiency at part load.

Table 3-2 also presents the performance (0–60 mph acceleration time) depending on availability of the battery to provide power assist. The lower acceleration time represents a fully charged battery, and the higher time represents no battery assist.

Table 3-3 shows results for FCV systems with onboard fuel processors and those with onboard liquid and gaseous hydrogen, all with both conventional drive and hybrid drive. Separate fuel processor efficiency maps were used for gasoline, methanol, and ethanol fuel processors. As noted previously, because of the efficiency characteristics of the fuel cell in contrast to those of an ICE, the relative gains these hybrids demonstrated were less than those for the ICE hybrids.

**Table 3-3 Best-Estimate Vehicle Fuel Economy and Performance Results for Fuel Processor Fuel Cells and Hydrogen Fuel Cells with Conventional and Hybrid Electric Drives**

Propulsion System	Fuel Economy, mpg gasoline equivalent				0-60 mph Acceleration Time, s	Vehicle Efficiency, %
	Urban	Highway	Composite	Change, %		
Gasoline DOD SI CD Baseline	18.5	26.2	21.3	—	7.9	18
Gasoline/naphtha FP FCV	29.9	35.4	32.2	51	9.9	28
Gasoline/naphtha FP FC HEV	38.5	36.4	37.5	76	9.2	34
MeOH FP FCV	32.7	38.7	35.2	65	9.9	31
MeOH FP FC HEV	41.8	39.6	40.8	92	9.1	37
EtOH FP FCV	29.9	35.4	32.2	51	9.9	28
EtOH FP FC HEV	38.5	36.4	37.5	76	9.2	34
H <sub>2</sub> FCV	49.4	52.6	50.8	139	9.6	43
H <sub>2</sub> FC HEV	58.5	53.3	56.1	163	8.4	48

The fuel economy results listed in Tables 3-1 through 3-3 represent the best-estimate scenarios; Table 3-4 also includes the best-case and worst-case scenario predictions. These predictions were also generated by using simulation models and are based on input data and assumptions that capture the uncertainties of the various technologies.

The worst-case scenarios for the conventional drive vehicles assumed that the current state-of-the-art technology levels (no DOD) for engines and transmissions are maintained without further improvements. For the hybrids and the fuel cell system vehicles, these scenarios incorporated more pessimistic assumptions about component masses and efficiencies. The worst-case hybrid scenarios also assumed a mild hybridization strategy in which the engines would be turned off only when the vehicle was stopped. Also included in this scenario for the fuel cell HEVs was the assumption that the fuel cell system could not be shut off throughout the duty cycle.

The best-case scenarios are based on assumptions that the technologies will exceed their targets in mass and efficiency for the 2010 timeframe. In the case of conventional drive vehicles, both vehicle level and powertrain improvements were assumed. Best-case vehicle-level assumptions include reductions in mass and aerodynamic losses. For powertrains, improvements in transmission design—such as the use of wider ratio spreads, providing additional overdrive ratios, and an additional gear to maintain customer shift pleasability—were included in the best-case scenarios. For the conventional hybrids and fuel cell system vehicles, best-case scenarios incorporated reductions in component mass and improvements in operating efficiencies. In addition, the best-case scenarios for the hybrid systems included downsized engines along with concepts often referred to as strong hybridization.

The data from Table 3-4 are plotted in Figure 3-1 with the best- and worst-case scenarios superimposed on the bars. The figure illustrates that the less-mature propulsion systems with larger uncertainties are strong hybrids and fuel processor FCVs.

**Table 3-4 Composite Fuel Economy Results for Best-Estimate, Best-Case, and Worst-Case Scenarios**

Propulsion System	Fuel Economy, mpg gasoline-equivalent		
	Worst Case	Best Estimate	Best Case
Gasoline DOD SI CD Baseline	20.2 <sup>a</sup>	21.3	22.4
Gasoline DI SI CD	23.2	24.2	25.4
Diesel DI CI CD	25.2	25.8	27.1
E85 DOD SI CD	20.2 <sup>a</sup>	21.3	22.4
CNG DOD SI CD	19.9 <sup>a</sup>	21.0	22.1
H <sub>2</sub> DOD SI CD	24.3 <sup>a</sup>	25.6	26.9
Gasoline DOD SI HEV	24.5	26.5	34.0
Gasoline DI SI HEV	27.0	29.2	33.6
Diesel DI CI HEV	28.5	30.8	39.4
E85 DOD SI HEV	24.5	26.5	34.0
CNG DOD SI HEV	23.5	25.4	32.5
H <sub>2</sub> DOD SI HEV	29.2	31.6	40.5
Gasoline/naphtha FP FCV	25.7	32.2	36.3
Gasoline/naphtha FP FC HEV	29.5	37.5	42.2
MeOH FP FCV	28.1	35.2	39.6
MeOH FP FC HEV	32.7	40.8	45.9
EtOH FP FCV	25.7	32.2	36.3
EtOH FP FC HEV	29.5	37.5	42.2
H <sub>2</sub> FCV	47.6	50.8	54.5
H <sub>2</sub> FC HEV	52.6	56.1	59.8

<sup>a</sup> Engine modeled without DOD for the worst-case scenario.

Distribution functions were developed for each TTW propulsion option to describe the variation in fuel economy for the Monte Carlo WTW calculations. All of the ICE fuel economies were fit using a Gamma function. For each, the 0.1 percentile was set to the worst-case value and the 99.9 percentile was set to the best-case value. The Gamma function scale parameter was adjusted so that the mean of the distribution matched the best-estimate value. Figure 3-2 displays, as an example, the distribution used for the baseline gasoline engine.

For the fuel cell systems, we found that the Weibull distribution did the best job of fitting the vehicle fuel economy results. The 0.1 percentile was set to the worst-case value and the 95th percentile was set to the best-case value. The scale parameter was adjusted to match the mean of the distribution to the best-estimate value. A sample distribution for the hydrogen fuel cell conventional drive vehicle is shown in Figure 3-3.

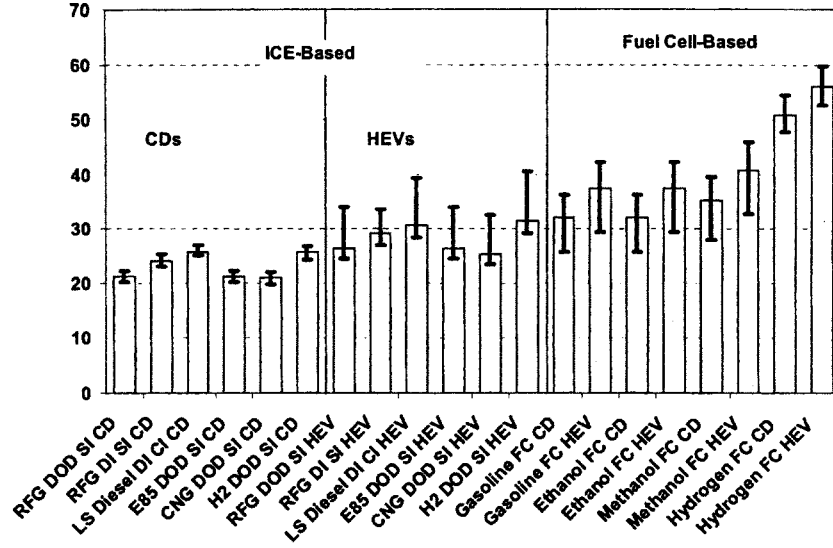


Figure 3-1 Fuel Economy Predictions with Superimposed Best-Case and Worst-Case Scenarios

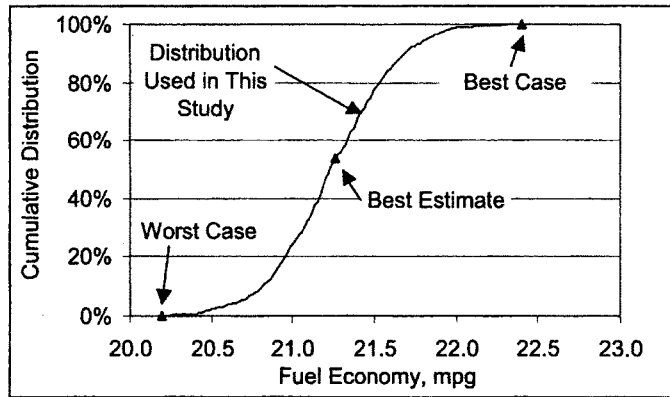


Figure 3-2 Fuel Economy Distribution for Baseline Gasoline Displacement on Demand Spark-Ignition Conventional Drive



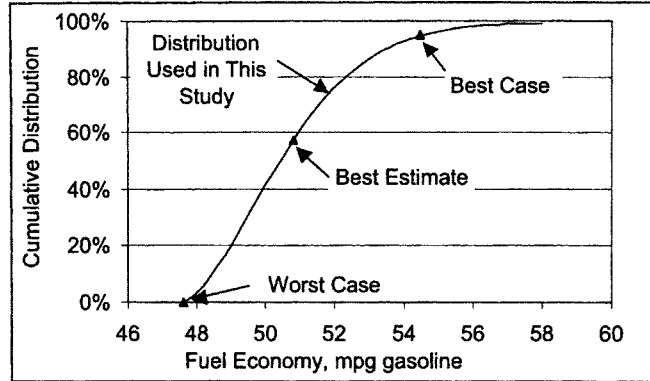


Figure 3-3 Fuel Economy Distribution for Hydrogen Fuel Cell Vehicle

### 3.2 Discussion of Tank-to-Wheel Fuel Economy Results

This analysis assesses the potential fuel economy benefits of numerous advanced engine technologies used in conjunction with alternative fuels and powertrain architectures. Our study included mature, production-ready technologies for improving fuel economy, such as DOD; more aggressive technologies such as DI SI, CNG, and DI diesel ICEs; and others, even more advanced technologies, such as fuel cell systems. Compliance with emission regulations was taken into account, and customer expectations of vehicle performance and drive quality were never compromised. Among the ICE technologies, the diesel engine offers the greatest benefit in fuel economy, hybridization provides additional gains for all technologies, and the onboard hydrogen fuel cell system yields the highest potential.

#### 4. WELL-TO-WHEELS RESULTS

Section 2 described the methods we used to select and simulate fuel production pathways (WTT) and vehicle propulsion technologies (TTW). Section 3 presented fuel economy results. WTT energy and emission results for 27 fuel pathways and 2 electricity pathways with the IAQR are presented in Appendix C. In the Phase 2 study, the WTT and TTW simulations are integrated within the GREET model. Table 4-1 lists the subsections in this section where we present results for certain fuel/vehicle propulsion systems analyzed in the Phase 2 study. For each of the vehicle/fuel systems, we generated results for the 17 items listed in Table 4-2.

WTW simulations in the Phase 2 study included 84 vehicle/fuel systems with 17 items, 28 hydrogen ICE systems meeting the Bin 2 NO<sub>x</sub> standard with 2 items (TNO<sub>x</sub> and UNO<sub>x</sub>); 8 systems meeting the IAQR power plant emissions with 17 items; and 4 hydrogen ICE systems meeting the IAQR power plant emissions and Bin 2 NO<sub>x</sub> standards with 2 items. The 124 WTW options result in 1,628 individual items for which we generated probability-based output results by using GREET simulations. The results for the 1,628 items are presented in Appendix D. In this section, we present charts that illustrate the results for selected items associated with selected vehicle/fuel systems.

Section 4.1 presents results for 18 vehicle/fuel systems, selected to illustrate general trends in energy use and emissions changes that result from the use of advanced vehicle technologies and new transportation fuels. Section 4.2 explores specific issues of interest with results for selected fuel production pathway groups and for selected vehicle propulsion systems.

Table 4-1 Combinations of Fuel Production Pathways and Vehicle Propulsion Technologies Simulated in this Study

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.1?	Included in Section 4.2?										
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11
<b>Oil-Based</b>													
1	30-ppm-S RFG without oxygenate	DOD SI CD	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
2		DOD SI HEV	Y								Y		
3	10-ppm-S RFG without oxygenate	DI SI CD	Y			Y							
4		DI SI hybrid		Y		Y		Y					
5	5-ppm-S gasoline without oxygenate	FP FCV	Y			Y							
6		FP FC HEV		Y		Y		Y					
7	15-ppm-S diesel	DI CI CD	Y		Y	Y							
8		DI CI HEV	Y	Y		Y		Y		Y			
9	Naphtha	FP FCV		Y									
10		FP FC HEV		Y				Y					
<b>NG-Based</b>													
11	NA NG to CNG	DOD SI CD	Y		Y	Y						Y	
12		DOD SI HEV		Y		Y	Y	Y			Y	Y	
13	NNA NG to CNG via LNG	DOD SI CD										Y	
14		DOD SI HEV					Y					Y	
15	NNA NG to methanol	FP FCV	Y		Y							Y	
16		FP FC HEV		Y				Y		Y		Y	
17	NNA NG to FT diesel	DI CI CD	Y		Y	Y						Y	
18		DI CI HEV		Y		Y		Y		Y		Y	
19	NNA NG to FT naphtha	FP FCV										Y	
20		FP FC HEV						Y				Y	

Table 4-1 (Cont.)

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.1?	Included in Section 4.2?										
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11
<b>NG-Based (cont.)</b>													
21	DOD SI CD, Bin 5	Y			Y				Y			Y	Y
22	DOD SI HEV, Bin 5		Y		Y	Y	Y					Y	Y
23	NA NG to GH <sub>2</sub> produced in central plants	Y											
24	DOD SI HEV, Bin 2	Y											
25	FCV	Y		Y	Y				Y			Y	
26	FC HEV		Y		Y	Y	Y			Y		Y	
27	DOD SI CD, Bin 5								Y			Y	
28	DOD SI HEV, Bin 5					Y						Y	
29	NNA NG to GH <sub>2</sub> produced in central plants via LNG												
30	DOD SI HEV, Bin 2												
31	FCV								Y			Y	
32	FC HEV					Y						Y	
33	DOD SI CD, Bin 5								Y				Y
34	DOD SI HEV, Bin 5					Y							Y
35	NA NG to GH <sub>2</sub> produced in refueling stations												Y
36	DOD SI HEV, Bin 2												Y
37	FCV								Y				
38	FC HEV					Y				Y			
39	DOD SI CD, Bin 5								Y				
40	DOD SI HEV, Bin 5						Y						
41	NNA NG to GH <sub>2</sub> produced in refueling stations via LNG												
42	DOD SI HEV, Bin 2												
43	FCV								Y				
44	FC HEV					Y							

Table 4-1 (Cont.)

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.1?	Included in Section 4.2?										
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11
<b>NG-Based (cont.)</b>													
45	DOD SI CD, Bin 5				Y			Y				Y	
46	DOD SI HEV, Bin 5				Y	Y	Y					Y	
47	NA NG to LH <sub>2</sub> produced in central plants				DOD SI CD, Bin 2							Y	
48	DOD SI HEV, Bin 2											Y	
49	FCV	Y			Y				Y				
50	FC HEV		Y		Y	Y	Y						
51	DOD SI CD, Bin 5								Y				
52	DOD SI HEV, Bin 5						Y						
53	NNA NG to LH <sub>2</sub> produced in central plants				DOD SI CD, Bin 2								
54	DOD SI HEV, Bin 2												
55	FCV								Y				
56	FC HEV						Y						
57	DOD SI CD, Bin 5									Y			
58	DOD SI HEV, Bin 5						Y						
59	NA NG to LH <sub>2</sub> produced in refueling stations				DOD SI CD, Bin 2								
60	DOD SI HEV, Bin 2												
61	FCV								Y				
62	FC HEV						Y						
63	DOD SI CD, Bin 5									Y			
64	DOD SI HEV, Bin 5						Y						
65	NNA NG to LH <sub>2</sub> produced in refueling stations via LNG				DOD SI CD, Bin 2								
66	DOD SI HEV, Bin 2												
67	FCV								Y				
68	FC HEV						Y						

Table 4-1 (Cont.)

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.1?	Included in Section 4.2?										
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11
<b>Bioethanol</b>													
69		E85 DOD SI CD	Y		Y	Y					Y		
70	Com to ethanol	E85 DOD SI HEV		Y		Y			Y			Y	
71		E100 FP FCV										Y	
72		E85 DOD SI CD	Y		Y	Y						Y	
73	Cellulosic biomass to ethanol	E85 DOD SI HEV		Y		Y			Y			Y	
74		E100 FP FCV	Y									Y	
75		E100 FP FC HEV							Y			Y	
<b>Electricity to Hydrogen via Electrolysis</b>													
76		DOD SI CD, Bin 5				Y			Y			Y	Y
77		DOD SI HEV, Bin 5				Y			Y			Y	Y
78	U.S. average electricity to GH <sub>2</sub>	DOD SI CD, Bin 2											
79	produced in refueling stations	DOD SI HEV, Bin 2											
80		FCV	Y		Y	Y			Y			Y	Y
81		FC HEV		Y		Y			Y		Y	Y	Y
82		DOD SI CD, Bin 5										Y	Y
83		DOD SI HEV, Bin 5										Y	Y
84	CA average electricity to GH <sub>2</sub>	DOD SI CD, Bin 2											Y
85	produced in refueling stations	DOD SI HEV, Bin 2											Y
86		FCV										Y	
87		FC HEV										Y	

Table 4-1 (Cont.)

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.1?	Included in Section 4.2?										
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11
<b>Electricity to Hydrogen via Electrolysis (Cont.)</b>													
88	DOD SI CD, Bin 5							Y				Y	Y
89	DOD SI HEV, Bin 5							Y				Y	Y
90	U.S. average electricity to LH <sub>2</sub> produced in refueling stations												
91	DOD SI CD, Bin 2												
92	DOD SI HEV, Bin 2												
93	FCV											Y	Y
94	FC HEV							Y				Y	Y
95	DOD SI CD, Bin 5											Y	
96	DOD SI HEV, Bin 5											Y	
97	CA average electricity to LH <sub>2</sub> produced in refueling stations												
98	DOD SI CD, Bin 2												
99	DOD SI HEV, Bin 2												
100	FCV											Y	
101	FC HEV											Y	
102	DOD SI CD, Bin 5												
103	DOD SI HEV, Bin 5							Y					
104	NA NG CC electricity to LH <sub>2</sub> produced in refueling stations												
105	DOD SI CD, Bin 2												
106	DOD SI HEV, Bin 2												
107	FCV	Y											
108	FC HEV							Y					
109	DOD SI CD, Bin 5												
110	DOD SI HEV, Bin 5												
111	FCV												
112	FC HEV							Y					

Table 4-1 (Cont.)

Fuel Production Pathway	Vehicle Propulsion System	Included in Section 4.17	Included in Section 4.27													
			4.2.1	4.2.2	4.2.3	4.2.4	4.2.5	4.2.6	4.2.7	4.2.8	4.2.9	4.2.10	4.2.11			
<b>Electricity to Hydrogen via Electrolysis (Cont.)</b>																
112	Renewable electricity to GH <sub>2</sub> produced in refueling stations	FCV	Y						Y	Y						
113		DOD SI CD, Bin 5														Y
114		DOD SI HEV, Bin 6														Y
115	U.S. average electricity to GH <sub>2</sub> produced in refueling stations, adopted IAQR	DOD SI CD, Bin 2														Y
116		DOD SI HEV, Bin 2														Y
117		FCV														Y
118		FC HEV														Y
119		DOD SI CD, Bin 5														Y
120		DOD SI HEV, Bin 5														Y
121	U.S. average electricity to LH <sub>2</sub> produced in refueling stations, adopted IAQR	DOD SI CD, Bin 2														Y
122		DOD SI HEV, Bin 2														Y
123		FCV														Y
124		FC HEV														Y
<b>Total Number of Pathways</b>		124	18	15	9	28	19	25	26	16	23	17	21	21		



**Table 4-2 Energy and Emission Items Analyzed in Phase 2 Study**

Energy	Greenhouse Gases	Total Emissions	Urban Emissions
Total Energy (TE)	CO <sub>2</sub>	Total VOC	Urban VOC
Fossil Energy (FE, subset of TE)	CH <sub>4</sub>	Total CO	Urban CO
Petroleum Energy (subset of FE)	N <sub>2</sub> O	Total NO <sub>x</sub>	Urban NO <sub>x</sub>
	Total CO <sub>2</sub> -equivalent GHG	Total PM <sub>10</sub>	Urban PM <sub>10</sub>
		Total SO <sub>x</sub>	Urban SO <sub>x</sub>

#### 4.1 Results for 18 Selected Propulsion Systems

Of the 124 vehicle/fuel systems simulated in this study, we selected 18 systems and present their WTW results for the 17 items analyzed (Table 4-2) to allow us to draw general conclusions about the energy and emission effects of advanced vehicle technologies and new transportation fuels. The WTW results for the 18 systems, for each of the 17 items, are discussed and illustrated in charts provided on the following pages.

Of the 18 systems we selected, six are petroleum-based, six are NG-based, and six are bioethanol- and electricity-based. The reformulated gasoline-fueled, spark-ignition engine with displacement on demand in conventional drive (RFG SI DOD CD) is the baseline to which other technology options are compared.

In all the charts presented in this section, for each vehicle/fuel system, the bottom section of the bar represents WTT per-mile results; the top section of the bar represents TTW per-mile results; the line superimposed on each bar represents the WTW uncertainty range for the P10 and P90 values (while the bar represents the P50 value). The pathways in the figures are grouped by energy resource: oil, NG, and bioethanol and electricity.

##### 4.1.1 Total Energy Use

Of the six oil-based pathways shown in Figure 4-1, the reductions in WTW total energy use by the five advanced systems primarily result from the vehicle fuel consumption reductions provided by the advanced vehicle technologies, but the more efficient diesel WTT stage was a factor in the reduced WTW energy use for the diesel pathway. Direct injection gasoline, compression ignition diesel, and hybrids all reduce WTW total energy use. Our results show that gasoline fuel processor FCVs achieve energy savings equivalent to those of diesel hybrids. The uncertainty bands in Figure 4-1 indicate that, compared to conventional engine technologies, hybrid and fuel cell technologies are subject to greater WTW energy use uncertainties.

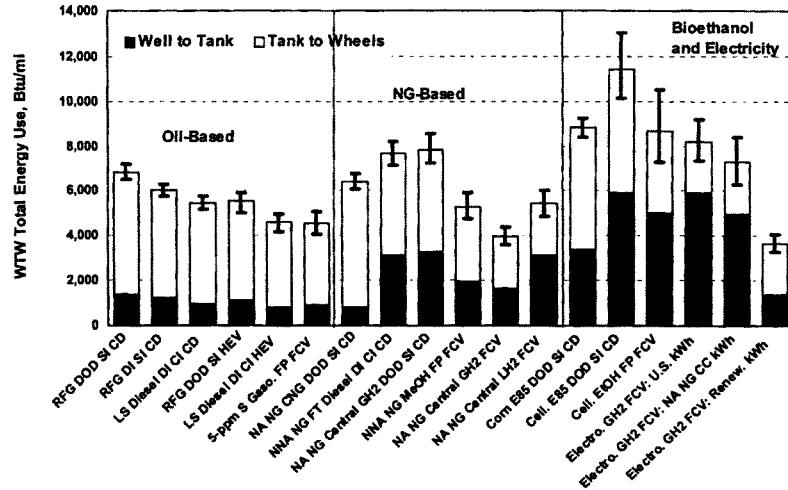


Figure 4-1 WTW Total Energy Use of 18 Vehicle/Fuel Systems (Btu/mi)

For the six NG-based systems, the CNG DOD SI engine achieves a small energy savings. Use of the CI diesel engine fueled with FT diesel and the DOD SI engine fueled with GH<sub>2</sub> result in increased WTW total energy use, relative to the energy use of the gasoline SI baseline. Figure 4-1 shows clearly that the energy use increases for these two technologies are attributable to the increased WTT energy use for production of FT diesel and GH<sub>2</sub>. The moderate reductions in vehicle fuel consumption by these two engine technologies are not enough to offset the increased WTT energy use. On the other hand, the three FCVs fueled with methanol (via onboard fuel processors) and with GH<sub>2</sub> and LH<sub>2</sub> achieve WTW energy savings, even though WTT energy use for the three fuels is high. The fuel consumption reductions of these FC technologies more than offset their increased WTT energy use.

Of the six bioethanol- and electricity-based systems, all options, except renewable electricity for GH<sub>2</sub> FCVs, result in increased WTW energy use. For pathways involving renewable electricity (such as hydro-power, wind power, and solar power), only generated electricity (in Btu) was taken into account. If the primary energy for renewable electricity generation were included, the renewable electricity system would result in substantial WTW energy use. However, in our opinion, because renewable primary energy is not subject to energy resource depletion, inclusion of primary energy in renewable electricity is not meaningful. We will discuss this issue in detail later.

The largest increase in WTW total energy use is by SI engines powered with cellulosic ethanol. For cellulosic ethanol, our energy analysis is based on the energy (in Btu) in harvested biomass. Cellulosic ethanol processing plants consume a large amount of biomass energy for ethanol production. That consumption results in large amount of WTW total energy use for cellulosic ethanol systems. For corn ethanol, we account for the energy required for agriculture and processing corn into ethanol, not the energy in the corn kernels. This accounting decision results in less WTT energy use for corn ethanol than for cellulosic ethanol. For GH<sub>2</sub> from U.S. average electricity via electrolysis, the large WTT energy use is caused by energy losses during electricity generation, GH<sub>2</sub> production, and GH<sub>2</sub> compression.

The WTW total energy use results for bioethanol- and renewable electricity-based systems demonstrate a key issue concerning ways of accounting for Btu energy when very different primary energy sources are involved. The accounting system that researchers choose can significantly affect WTW total energy use results. We prefer a Btu accounting system that addresses energy resource depletion issues and emissions calculations (i.e., combustion emissions of an energy source). For that reason, we start to account for Btu energy use at different starting points for different fuels (see Figure 4-2). In particular, we begin to account for the energy in primary energy feedstocks for fossil energy-based fuels (i.e., Btu energy contained in crude oil, NG, and coal recovered from underground). For corn-based ethanol, the WTW analysis includes petroleum, fossil energy, and all emissions for agriculture, fertilizer manufacture, corn farming, corn transportation, ethanol manufacture, and ethanol transportation. For other renewable energy-based fuels, we begin to account for Btu energy in the fuels produced, because the Btus in primary *renewable* energy sources are not a concern. The exception is cellulosic ethanol, for which we begin to account for Btus in the biomass delivered to cellulosic plants. This starting point is influenced by the fact that we need to calculate the emissions associated with biomass combustion (as well as fermentation) in cellulosic ethanol plants. Some researchers may argue that accounting for Btus in primary energy sources could be helpful in determining needs for other resources (such as land and water requirements). In this way, the Btus serve as a surrogate to depletion of resources other than energy resources. We argue that, in this case, depletion of other resources should be addressed directly instead of Btus serving as a surrogate.

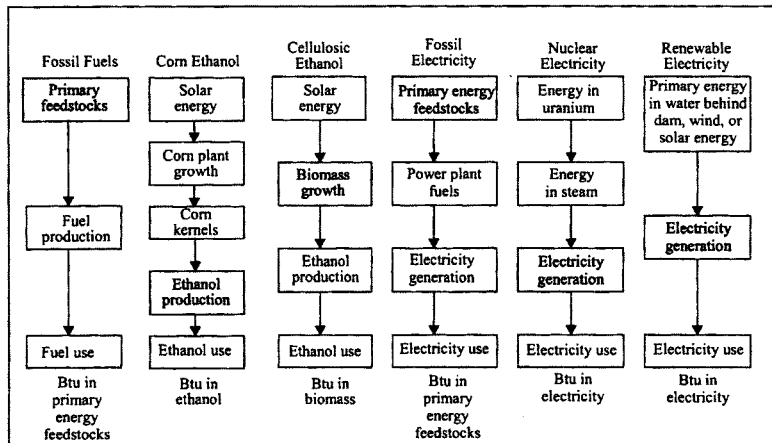


Figure 4-2 Energy Accounting System for Different Fuels in GREET

Btu accounting for nuclear electricity could be based either on the uranium resource or on the generated electricity. Although uranium is not renewable, the U.S. uranium resources will last for more than 150 years, based on current U.S. uranium consumption by domestic nuclear power plants, and the worldwide uranium resources are so large that uranium resource consumption may not be a concern. The estimated uranium reserve and resources in the United States are 1,418 and 8,330 million lb of  $U_3O_8$  equivalent, respectively (EIA 2003). Between 1996 and 2003, the annual uranium consumption by U.S. nuclear power plants was about 55 million lb of  $U_3O_8$  equivalent (EIA 2003). Thus, the U.S. uranium reserve and resources could potentially meet the U.S. uranium demand for about 177 years at the current

U.S. uranium consumption rate. U.S. uranium resources only account for a few percentage points of the total worldwide uranium supply. Worldwide uranium resources will last much longer to supply worldwide uranium demand.

Thus, uranium resources may not be a constraint for nuclear power generation. For this reason, we begin to account for Btus in electricity that is generated from nuclear power plants. In the GM-sponsored European WTW study (L-B-Systemtechnik GmbH et al. 2002), nuclear electricity energy was based on uranium. Also, we are aware that some engineering analyses for nuclear power plants account for Btus in the steam generated in nuclear plants. Although this accounting system could be helpful for nuclear power plant designs, it is not useful in addressing energy resource depletion issues.

Energy accounting systems involved in renewable energy resources obviously can be arbitrary. Total energy use results from such accounting systems could be misleading. We will demonstrate in our discussion of total fossil energy use results (below) that fossil energy use calculations are more meaningful when comparing fossil energy-based and renewable energy-based fuels.

#### 4.1.2 Fossil Energy Use

Figure 4-3 presents WTW per-mile fossil energy use results for the 18 vehicle/fuel systems. Fossil energy use here includes petroleum, NG, and coal. Because all three resources are finite, estimates of fossil energy use can help understand how each vehicle/fuel system addresses fossil energy resource depletion issues.

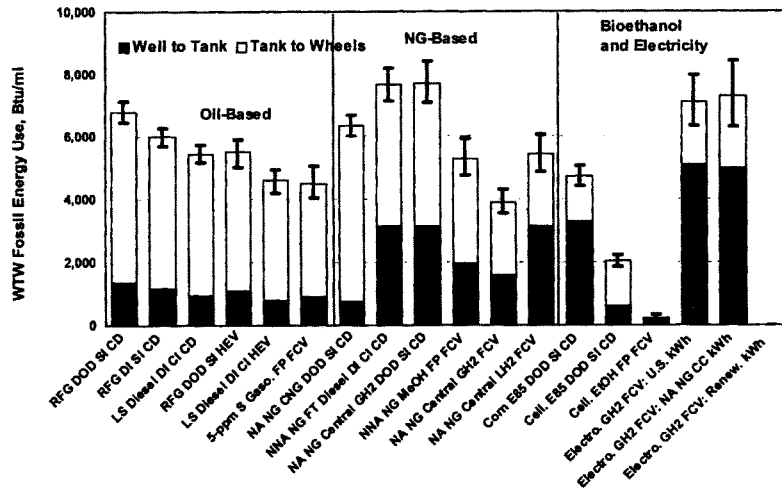


Figure 4-3 WTW Fossil Energy Use of 18 Vehicle/Fuel Systems (Btu/mi)

Among the 12 oil-based and NG-based systems, WTW fossil energy use patterns are similar to those for WTW total energy use. This is because the majority of the energy used for oil-based and NG-based systems is fossil energy. For these 12 systems, the reductions in fossil energy use primarily result from efficient vehicle technologies. CI engines, hybrids, and FCVs all achieve fossil energy reductions. Two systems, CI engines fueled with FT diesel and SI engines fueled with GH<sub>2</sub>, consume more per-mile fossil energy than the baseline gasoline ICE technology, because of the high WTT fossil energy use for producing FT diesel and GH<sub>2</sub> from NG.

The distinct difference between total energy and fossil energy use lies in bioethanol- and renewable electricity-based systems. Because the Btus in corn, biomass, and renewable primary energy sources are not included, these systems show large reductions in fossil energy use. In fact, reduced fossil energy use is one of the major reasons for interest in renewable fuels. Contrary to the results for total energy, cellulosic ethanol and renewable electricity are the best fuel options to reduce WTW fossil energy consumption. The relatively high fossil energy use for E85 cellulosic ethanol ICE technology is attributable to the gasoline portion (19% by volume) of the E85 blend.

The fossil energy use for GH<sub>2</sub> production from U.S. average electricity is similar to that for NG CC electricity. On the one hand, NG CC efficiency is much greater than that of most fossil-fuel-fired electric power plants. On the other hand, about 30% of U.S. electricity is generated from non-fossil-fuel-powered power plants (e.g., nuclear power plants and hydroelectric power plants). This offsets the low efficiency of conventional fossil fuel power plants, causing the fossil energy use of GH<sub>2</sub> from U.S. average electricity to be close to that of GH<sub>2</sub> from NG CC electricity.

Figures 4-1 and 4-3 together demonstrate the importance of separating the types of Btus in WTW energy use estimates. When renewable energy sources are involved, it is fossil energy, not total energy, that should be used to compare different technologies. This is because renewable Btus are not subject to energy resource depletion issues. One may argue that total energy use results could provide some indication of the intensity of the use of resources such as land, wind power, and solar power. While use of total energy could be a first-order approximation of these other resources, we maintain that the requirement of these other resources should be analyzed directly.

In the U.S. context, energy resource depletion issues may need to be addressed with separation of coal from oil and NG because the U.S. has a large coal reserve but very small oil and gas reserves, relative to U.S. consumption of the three energy sources. If any vehicle/fuel systems can help to move energy use from oil and NG to coal, these technologies would have additional energy benefits for the United States. While this switch benefit is beyond the scope of this study, we caution that readers should use additional care in interpreting energy resource depletion implications for fossil energy.

#### **4.1.3 Petroleum Use**

Figure 4-4 shows WTW per-mile petroleum use. Reductions in petroleum use by these technologies are an important energy benefit because the U.S. now imports about 60% of its petroleum, adding to national energy security concerns and potential negative economic effects. Not surprisingly, NG-, bioethanol-, and electricity-based systems almost eliminate petroleum use, despite the fact that petroleum is used during WTT activities for these fuels. The moderate amount of petroleum use for E85 results from the 19% gasoline content of the E85 blend.

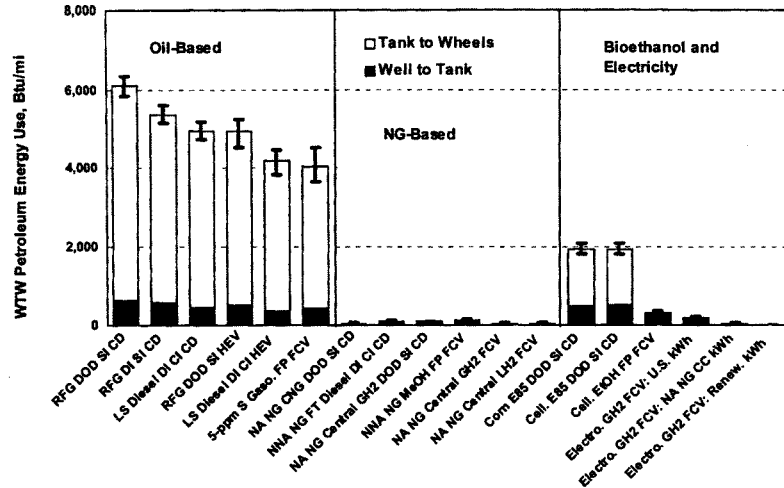


Figure 4-4 WTW Petroleum Use of 18 Vehicle/Fuel Systems (Btu/mi)

The reductions in petroleum use by the five oil-based systems, relative to the baseline gasoline ICE technology, result from vehicle efficiency gains (and efficient diesel production in the case of CI ICE technologies).

#### 4.1.4 GHG Emissions

Figures 4-5 through 4-8 present WTW per-mile GHG emission results for the 18 vehicle/fuel systems. Figure 4-5 shows total GHG emissions as CO<sub>2</sub>-equivalent emissions of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O, the three major GHGs from motor vehicles. The three GHGs are combined with their IPCC-recommended GWPs over the 100-year horizon (1 for CO<sub>2</sub>, 23 for CH<sub>4</sub>, and 296 for N<sub>2</sub>O).

Among the six oil-based systems, the reductions from the left to the right in the chart are caused primarily by vehicle efficiency gains. While *energy* reductions by the two diesel technologies (CI engine and CI engine hybrid) were large (see Figures 4-1 and 4-3), GHG emission reductions by the two technologies were relatively small, because diesel fuel has more carbon per unit of energy than gasoline. In particular, carbon intensity (grams of carbon per mmBtu) for diesel fuel is about 6% higher than that for gasoline. The high carbon intensity of diesel fuel offsets some of the GHG reduction benefits offered by efficient diesel engines.

Among the six NG-based systems, all result in GHG emission reductions relative to the GHG emissions of the baseline gasoline ICE. The GHG reductions by CI engines fueled with FT diesel and SI engines fueled with GH<sub>2</sub> are minimal because of the large amount of WTT GHG emissions. The small TTW GHG emissions for GH<sub>2</sub> ICE technology are N<sub>2</sub>O emissions from hydrogen internal combustion. The three fuel-cell technologies achieve significant GHG emission reductions. The two hydrogen FCVs have zero TTW GHG emissions. GHG emissions of methanol-fueled and LH<sub>2</sub>-fueled FCVs are comparable.

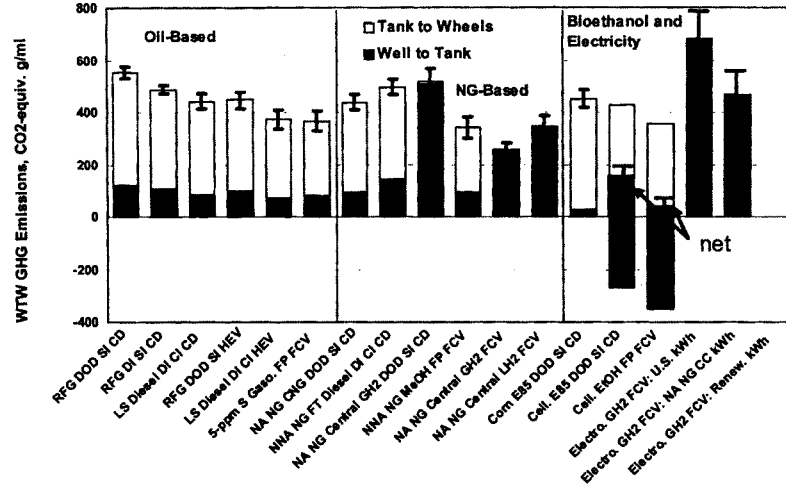


Figure 4-5 WTW GHG Emissions of 18 Vehicle/Fuel Systems (g/ml)

Among the six bioethanol- and electricity-based technologies, the renewable electricity-derived GH<sub>2</sub> system has zero GHG emissions. This is because our study includes the so-called operation-related emissions only. That is, emissions related to operational activities for the WTT stage are included. On the other hand, infrastructure-related GHG emissions (such as emissions associated with building roads, plants, and plant equipment) are not included for any of the pathways evaluated in this study.

The bars for cellulosic ethanol in Figure 4-5 require some additional explanation. The two cellulosic ethanol systems (for E85 SI and E100 FCVs) have negative WTT values because of carbon uptake during biomass growth, soil carbon sequestration in biomass farms, and GHG emission credits for electricity co-generated in cellulosic ethanol plants. The TTW emissions for E85 and E100 are similar to those for gasoline. Net emissions are shown by the positive or negative height of the light bars. For the cellulosic E85 in combustion engine case (Cell. E85 DOD SI CD), the best-estimate value for net GHGs was about 160 g/ml, a 70% reduction relative to the baseline. In the cellulosic ethanol-fueled FCV case (Cell. EtOH FP FCV), best-estimate GHG emissions were a little above zero because of soil carbon sequestration in biomass farms and GHG emission credits from co-generated electricity in cellulosic ethanol plants. The E85 SI ICE technology results in reduced GHG emission benefits because ICE technology is less efficient than FC technology and because E85 contains 19% gasoline. Corn ethanol E85-fueled SI ICE technology achieves only moderate GHG emission reductions, because WTT activities for corn ethanol consume a significant amount of fossil fuels (resulting in GHG emissions) and because cornfields produce a large amount of N<sub>2</sub>O emissions from nitrogen nitrification and denitrification.

NG CC electricity-derived GH<sub>2</sub> achieves moderate GHG emission reductions, compared to those for the U.S. electricity generation mix, because of its efficient electricity generation. On the other hand, the U.S. average electricity-derived GH<sub>2</sub> results in increased GHG emissions relative to the baseline gasoline ICE technology because over 50% of U.S. electricity is produced in coal-fired power plants, which have high

GHG emissions, and because electrolysis hydrogen pathways are generally inefficient. Renewable electricity-derived GH<sub>2</sub> FCVs achieve zero WTW GHG emissions.

Results of the three electrolysis hydrogen pathways in Figure 4-5 demonstrate the importance of electricity sources for electrolysis hydrogen in WTW GHG emissions for hydrogen FCVs. Even though it is inefficient to produce hydrogen via electrolysis, electrolysis hydrogen could achieve GHG emission reductions where renewable or zero-carbon electricity is available for hydrogen production.

#### 4.1.5 CO<sub>2</sub> Emissions

Figure 4-6 shows WTW per-mile CO<sub>2</sub> emissions. Except for the three bioethanol systems, the general trends between GHG and CO<sub>2</sub> emissions are similar, although emission reduction benefits for NG-based systems are a little larger for CO<sub>2</sub> emissions than for GHG emissions. This is because, in most cases, CO<sub>2</sub> emissions account for the majority of GHG emissions. For the three bioethanol systems, especially corn ethanol, N<sub>2</sub>O emissions from farms are a significant emission source, accounting for about 1/5 of total WTW GHG emissions because N<sub>2</sub>O emissions are amplified by the relatively high GWP of N<sub>2</sub>O (296). Ignoring N<sub>2</sub>O emissions would result in overly optimistic GHG emission reduction benefits for bioethanol.

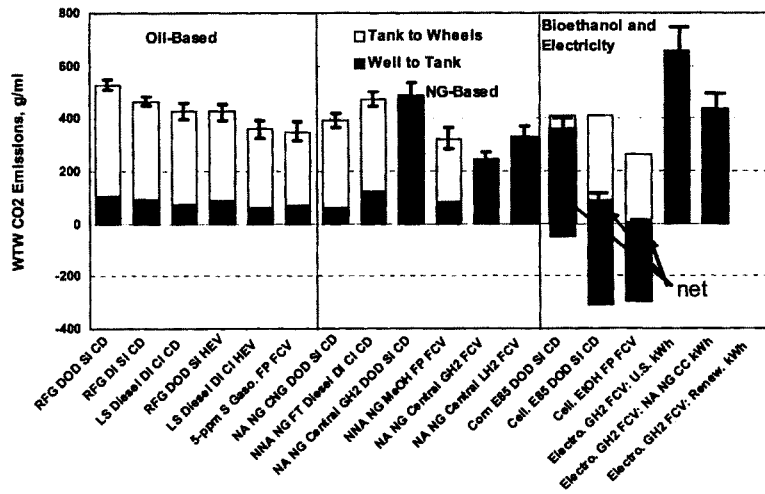


Figure 4-6 WTW CO<sub>2</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)



4.1.6 CH<sub>4</sub> Emissions

WTW CH<sub>4</sub> emissions, as shown in Figure 4-7, primarily result from WTT emissions. The CNG vehicle system has the largest CH<sub>4</sub> emissions because of its high WTT and TTW emissions. Electrolysis hydrogen generated by using the U.S. average electricity mix and NG CC electricity also have high CH<sub>4</sub> emissions. In the former case, a significant amount of CH<sub>4</sub> emissions are generated during coal mining and electricity generation. In the latter case, a significant amount of CH<sub>4</sub> emissions are generated during NG recovery and transmission and during electricity generation. The high CH<sub>4</sub> emissions for NG-based GH<sub>2</sub> and corn-based ethanol are attributable to high WTT CH<sub>4</sub> emissions.

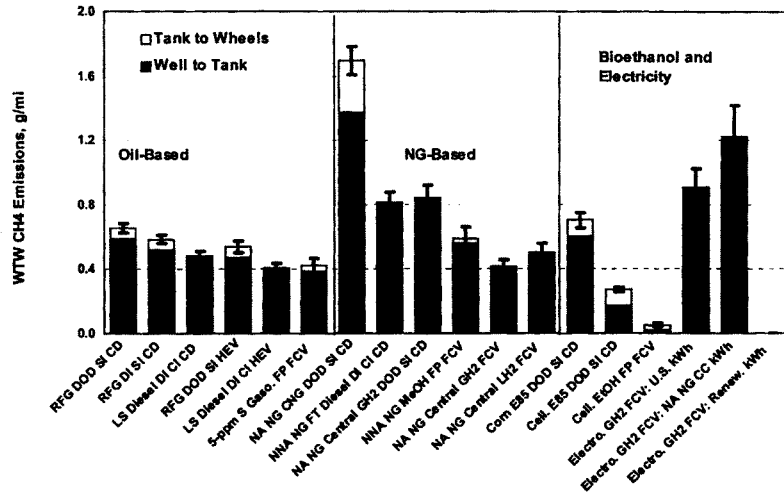


Figure 4-7 WTW CH<sub>4</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

4.1.7 N<sub>2</sub>O Emissions

Figure 4-8 presents WTW N<sub>2</sub>O emissions for the 18 vehicle/fuel systems. On a per-mile basis, corn-ethanol's N<sub>2</sub>O emissions are about ten times, and cellulosic ethanol's N<sub>2</sub>O emissions are about five times, those for most non-bioethanol systems. These results demonstrate the large contribution of N<sub>2</sub>O emissions from agriculture and the importance of including N<sub>2</sub>O emissions in WTW GHG emission estimates when bioethanol is involved.

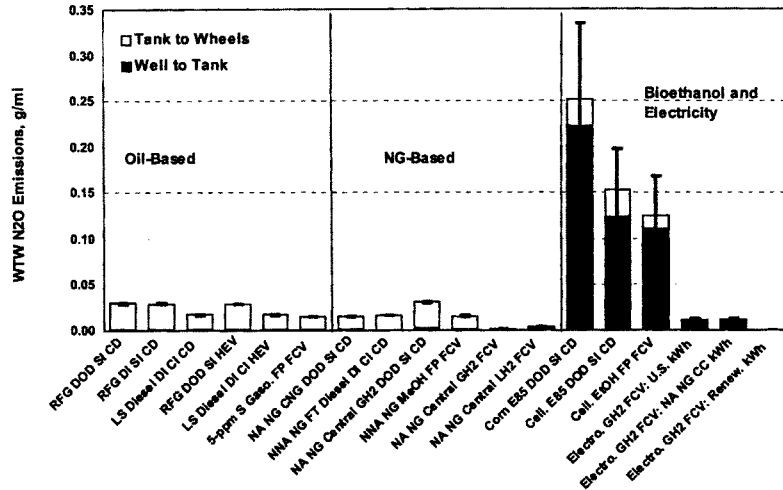


Figure 4-8 WTW N<sub>2</sub>O Emissions of 18 Vehicle/Fuel Systems (g/mi)

#### 4.1.8 Total/Urban VOC Emissions

Figures 4-9 and 4-10 present WTW total and urban VOC emissions. VOC emissions are a precursor for ozone formation. VOC emissions here include all hydrocarbon species. We do not address ozone-forming potentials, which could vary significantly among different vehicle/fuel systems for a given level of total VOC emissions.

In this study, total emissions of the five criteria pollutants include emissions occurring everywhere; urban emissions, a subset of total emissions, are those occurring within U.S. urban areas. For this study, total and urban emissions for the five criteria pollutants are determined by the locations of facilities. Urban areas here are consistent with the U.S. Bureau of the Census' definition of metropolitan areas, with a population of over 125,000 in 1990. In our simulations, urban WTT emissions in g/mmBtu were estimated on the basis of the share of urban facilities vs. all facilities for production of a given fuel. The urban WTT emissions in g/mmBtu were then converted into g/mi with vehicle energy use rate in Btu/mi. On the other hand, total TTW emissions in g/mi were estimated directly with MOBILE or EMFAC for a given vehicle technology. Urban TTW emissions in g/mi were then estimated by multiplying the total TTW emissions by the urban VMT share of a vehicle. Urban WTW emissions were the sum of urban WTT and urban TTW emissions. Consequently, the calculated urban WTW emissions in g/mi in our study represent the emissions share in urban areas for a mile driven by a vehicle in both urban and nonurban areas (that is, a composite mile instead of a urban mile). If one intends to use the urban g/mi emission results from this study to estimate aggregated urban emissions of a vehicle during its lifetime, the total VMT, not urban VMT, of the vehicle should be used.

Because population exposure is an important factor in assessing the health effects of criteria pollutants, the separation of emissions into total and urban emissions in the GREET model is intended to provide an

approximation of potential population exposure. A detailed health effects assessment of criteria pollutants requires separation of emissions by location (in finer resolutions than the total and urban emission separation used in this study), long-distance transport of emissions, residence time of pollutants in the air, simulations of atmospheric concentrations of pollutants (and formation of secondary pollutants such as ozone and acid rain), and population exposure of the atmospheric concentration of pollutants. The simple separation of urban emissions from total emissions here is the first step toward a full assessment of the human health effects of criteria pollutants. The separation is not intended to replace detailed health effects assessments of air pollution.

Figure 4-9 shows three general tiers of VOC emissions for the 18 vehicle/fuel systems. The first tier, which has the highest total VOC emissions, includes the three bioethanol systems. The high total VOC emissions for the bioethanol systems are caused by two factors. First, ethanol is a volatile fuel — use of ethanol during the TTW stage results in a more evaporative emissions than those for diesel or gaseous fuels. Second, the WTT stage, especially ethanol plants, generate a large amount of VOC emissions. The second tier for total VOC emissions includes other volatile fuels such as gasoline and methanol. These fuels have high WTT and TTW VOC emissions primarily because of their evaporative emissions. The third tier, which has the lowest total VOC emissions, includes non-volatile fuels such as petroleum diesel, FT diesel, CNG, and hydrogen. These fuels have low WTT and TTW VOC emissions. The five direct-hydrogen FC systems (NG-based GH<sub>2</sub> and LH<sub>2</sub> and GH<sub>2</sub> from three electricity sources) have the lowest VOC emissions. Furthermore, the uncertainty lines superimposed on the bars in Figure 4-9 show that direct-hydrogen FCVs reduce the uncertainty range of emissions, as well as the magnitude of emissions, relative to ICEs, ICE hybrids, and fuel-processor FCVs. The relatively large uncertainty ranges for ICE-based technologies are caused by their on-road emissions variations (see Section 2), while hydrogen FCVs will have zero emissions in any case.

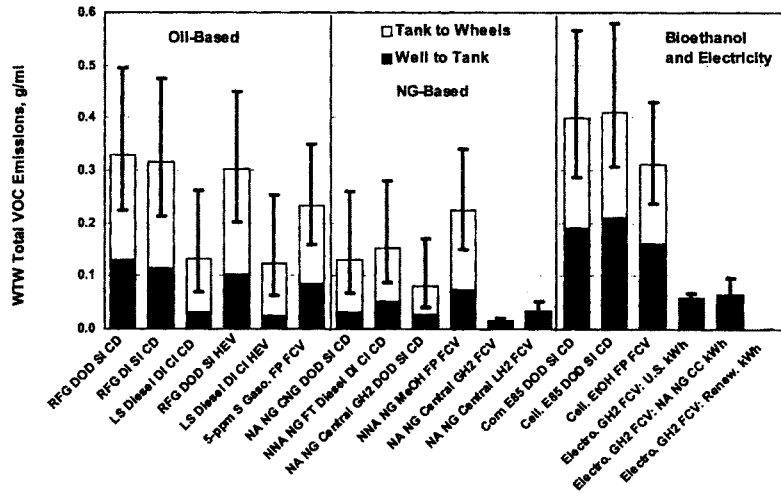


Figure 4-9 WTW Total VOC Emissions of 18 Vehicle/Fuel Systems (g/mi)

Figure 4-10 shows WTW urban VOC emissions. In contrast to the total VOC emission results, the three bioethanol systems have urban VOC emissions comparable to those of the four gasoline-powered systems. Urban VOC emissions for bioethanol systems are much lower than total VOC emissions because most ethanol plants are (or will be) located in rural areas, where corn and biomass feedstocks are produced. Diesel and CNG systems have lower urban VOC emissions. Direct-hydrogen FCVs have the lowest urban VOC emissions and the smallest uncertainty ranges.

Because VOC evaporative emissions represent a large share of total VOC emissions for volatile fuels including gasoline, ethanol, and methanol, differences in fuel characteristics, such as volatility, have a major impact on the total VOC emissions of the 18 systems.

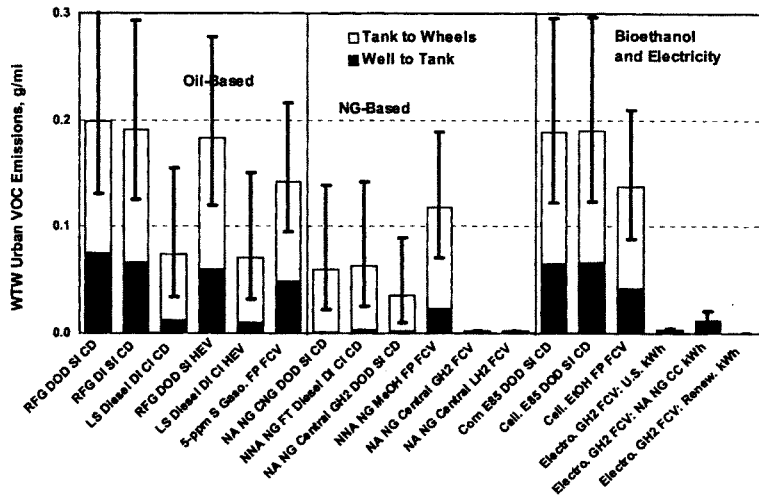


Figure 4-10 WTW Urban VOC Emissions of 18 Vehicle/Fuel Systems (g/ml)

#### 4.1.9 Total/Urban CO Emissions

Figures 4-11 and 4-12 show WTW total and urban CO emissions. CO air pollution was a major urban air pollution concern until the middle of the 1990s. Since then, vehicular CO emissions have been reduced dramatically in U.S. cities, most of which have become CO attainment areas. As a result, the focus of U.S. motor vehicle emissions regulations has shifted to controlling other pollutants such as NO<sub>x</sub> and PM<sub>10</sub>.

ICE-based technologies, except for hydrogen-fueled ICEs, have the highest total CO emissions. Onboard fuel-processor FCVs have the next-highest total CO emissions. Direct-hydrogen FCVs have the lowest CO emissions.

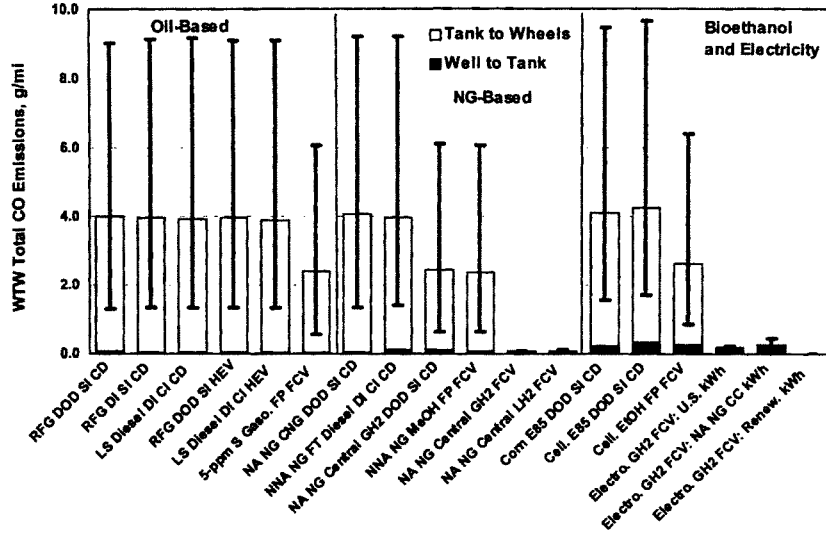


Figure 4-11 WTW Total CO Emissions of 18 Vehicle/Fuel Systems (g/ml)

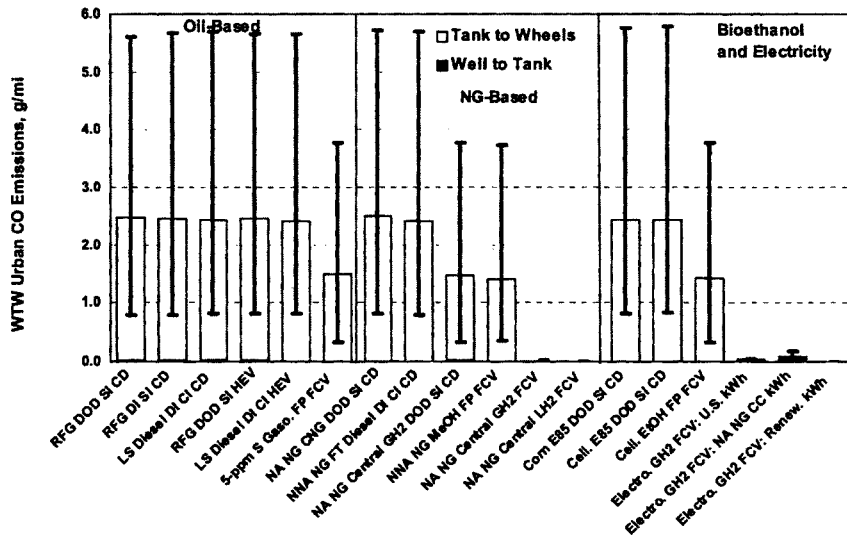


Figure 4-12 WTW Urban CO Emissions of 18 Vehicle/Fuel Systems (g/ml)

A distinct result, shown in Figure 4-11, is that almost all WTW CO emissions are produced during the TTW stage. Another noticeable result is that WTW CO emissions of ICE-based technologies and onboard fuel-processor FCVs are subject to great uncertainty because WTW CO emissions for these technologies are primarily from vehicle operations whose emissions are subject to great uncertainties (see Section 2).

Urban CO emissions are primarily driven by TTW vehicular CO emissions. Because of this, the patterns of urban CO emissions among the 18 vehicle/fuel systems are similar to those of total CO emissions. However, the amount of urban CO emissions is significantly lower than that of total CO emissions for a given technology because some of the total VMT (28%) by a given vehicle technology are in rural areas; consequently, some of the vehicular CO emissions are non-urban CO emissions.

Similar to VOC emissions results, direct-hydrogen FCVs are shown to have the lowest levels and the smallest uncertainty ranges for CO emissions.

#### 4.1.10 Total/Urban NO<sub>x</sub> Emissions

Figures 4-13 and 4-14 present WTW total and urban NO<sub>x</sub> emissions for the 18 vehicle/fuel systems. Figure 4-13 shows that the six petroleum-based systems have similar total NO<sub>x</sub> emission levels, with the exception that gasoline-fueled FCVs have fewer NO<sub>x</sub> emissions than do the other five systems. The similar levels of total NO<sub>x</sub> emissions are a result of similar WTT and TTW NO<sub>x</sub> emissions, with the exception that gasoline-fueled FCVs generate fewer TTW NO<sub>x</sub> emissions. The similar TTW NO<sub>x</sub> emissions for the five ICE-based technologies are a result of our assumption that all ICE technologies will meet the NO<sub>x</sub> emission standard for EPA's Tier 2 Bin 5 vehicle category.

Of the six NG-based systems, the NO<sub>x</sub> emissions from CNG vehicles are lower than those of the baseline gasoline ICE technology because CNG WTT NO<sub>x</sub> emissions are lower than gasoline and diesel WTT NO<sub>x</sub> emissions. On the other hand, NO<sub>x</sub> emissions from FT diesel CI ICE and hydrogen SI ICE (meeting Bin 5 NO<sub>x</sub> standard) are higher than those of the baseline gasoline ICE technology because a significant amount of NO<sub>x</sub> emissions are generated during production and transportation of FT diesel and production and compression of GH<sub>2</sub>. Of the WTW total NO<sub>x</sub> emissions for FT diesel CI ICE, TTW (vehicular) emissions account for 44%, cross-ocean transportation of FT diesel for 27%, and FT diesel production for 18%.

Table 4-3 lists the shares of total and urban NO<sub>x</sub> emissions associated with hydrogen-fueled ICEs and FCVs. Depending on the production pathway selected, hydrogen production, compression, or liquefaction could account for a large amount of the WTW NO<sub>x</sub> emissions.

Total NO<sub>x</sub> emissions from methanol-powered FCVs are similar to those of baseline gasoline technology even though onboard methanol fuel processors have somewhat lower NO<sub>x</sub> emissions than gasoline engines. This is because high NO<sub>x</sub> emissions occur during methanol production. Both direct GH<sub>2</sub> and direct LH<sub>2</sub> FCVs have total NO<sub>x</sub> emissions that are lower than those of the baseline gasoline technology because FCV operation generates zero emissions.

Of the six bioethanol- and electricity-based systems, the three bioethanol systems and GH<sub>2</sub> derived from U.S. average electricity result in much greater total NO<sub>x</sub> emissions than the baseline gasoline technology. The increases are caused by dramatically high WTT total NO<sub>x</sub> emissions for bioethanol and GH<sub>2</sub>. For bioethanol pathways, increased WTT NO<sub>x</sub> emissions are from farming activities, nitrification and denitrification of nitrogen fertilizer in agricultural fields, and from corn and cellulosic ethanol plants. The

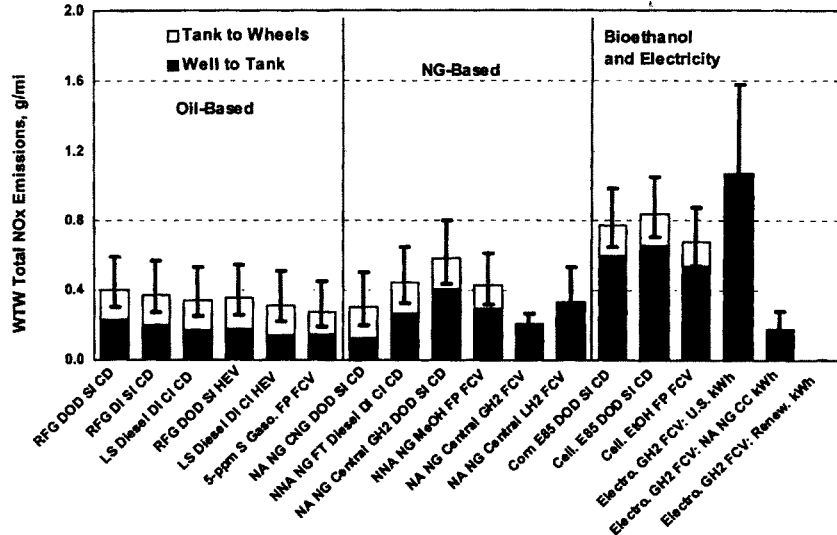


Figure 4-13 WTW Total NO<sub>x</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

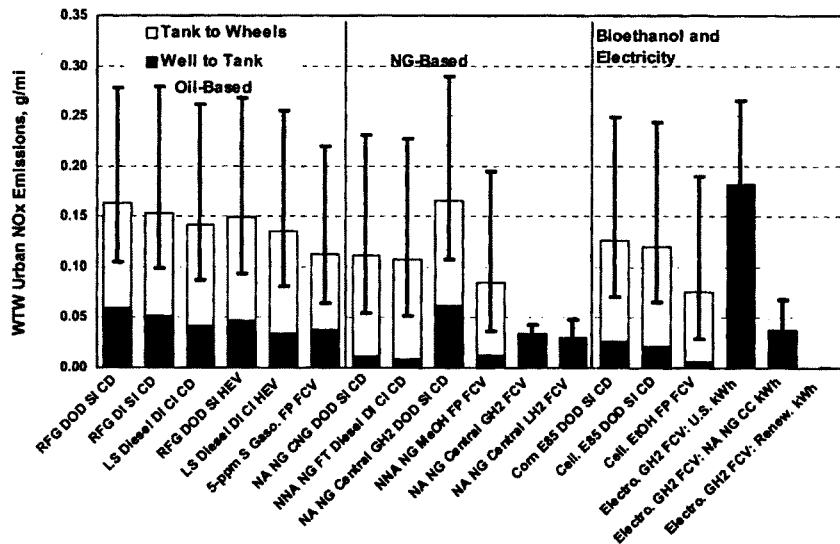


Figure 4-14 WTW Urban NO<sub>x</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

**Table 4-3 Shares of NO<sub>x</sub> Emissions by Hydrogen Production, Compression, and Liquefaction for Hydrogen-Fueled ICEs and FCVs<sup>a</sup>**

Production Method/ Propulsion Type	Total NO <sub>x</sub> Emissions					Urban NO <sub>x</sub> Emissions				
	Share, %					Share, %				
	WTW, gpm	TTW	H <sub>2</sub> Production	H <sub>2</sub> Compression or Liquefaction	Other	WTW, gpm	TTW	H <sub>2</sub> Production	H <sub>2</sub> Compression or Liquefaction	Other
NA NG Central GH <sub>2</sub>										
ICE	0.587	30.6	23.4	23.4	22.6	0.169	61.5	17.4	13.1	7.9
FCV	0.21	0.0	33.7	33.8	32.6	0.036	0.0	45.3	34.2	20.5
NA NG Central LH <sub>2</sub>										
ICE	0.828	21.8	16.7	49.8	11.7	0.158	65.7	7.6	24.1	2.7
FCV	0.328	0.0	21.4	63.7	14.9	0.03	0.0	22.1	70.1	7.8
NA NG Station GH <sub>2</sub>										
ICE	0.519	34.5	32.7	20.8	12.0	0.213	50.7	39.4	8.5	1.3
FCV	0.175	0.0	49.9	31.8	18.3	0.055	0.0	80.0	17.3	2.7
NA NG Station LH <sub>2</sub>										
ICE	1.291	13.9	13.2	67.9	5.0	0.352	31.6	24.5	42.8	1.1
FCV	0.56	0.0	15.3	78.9	5.8	0.123	0.0	35.9	62.6	1.5
Electrolysis GH <sub>2</sub> : U.S. Electricity Generation Mix										
ICE	2.616	6.7	89.2	4.1	0.0	0.538	20.6	75.9	3.5	0.0
FCV	1.228	0.0	95.7	4.4	0.0	0.211	0.0	95.7	4.4	0.0
Electrolysis LH <sub>2</sub> : U.S. Electricity Generation Mix										
ICE	3.442	5.2	68.7	25.3	0.8	0.677	16.4	60.5	22.3	0.7
FCV	1.638	0.0	72.4	26.7	0.9	0.283	0.0	72.4	26.7	0.9

<sup>a</sup> Hydrogen ICEs here are to meet Bin 5 NO<sub>x</sub> emission standard.

increased WTT NO<sub>x</sub> emissions for the electrolysis GH<sub>2</sub> pathway are from NO<sub>x</sub> emissions from fossil-fuel-powered electric power plants. Because NG CC electric power plants are efficient and clean, GH<sub>2</sub> derived from NG CC-based electricity actually results in reductions in total NO<sub>x</sub> emissions, although a large uncertainty range is associated with NO<sub>x</sub> emissions for this pathway. Renewable electricity-based GH<sub>2</sub> has zero total NO<sub>x</sub> emissions. As mentioned earlier, this study includes operation-related emissions; infrastructure-related emissions are excluded.

The results of WTT total NO<sub>x</sub> emissions for the 18 systems show that the WTT stage accounts for a larger share of WTT NO<sub>x</sub> emissions than does the TTW stage, because future vehicle technologies will be designed to meet the stringent NO<sub>x</sub> emission standards of EPA's motor vehicle Tier 2 standards. If total NO<sub>x</sub> emissions are to be reduced, WTT NO<sub>x</sub> emissions will need to be addressed.

Figure 4-14 shows WTT urban NO<sub>x</sub> emissions of the 18 vehicle/fuel systems. Urban NO<sub>x</sub> emissions are 60–80% lower than total NO<sub>x</sub> emissions for most of the systems. Urban NO<sub>x</sub> emissions for all the systems except for the five direct-hydrogen FCV technologies are dominated by WTT urban NO<sub>x</sub> emissions. Of the five direct-hydrogen FCV systems, NG-based GH<sub>2</sub> and LH<sub>2</sub> and electrolysis hydrogen



derived from NG CC and renewable electricity help reduce urban NO<sub>x</sub> emissions. Onboard fuel-processor-equipped FCVs achieve moderate urban NO<sub>x</sub> emission reductions. ICE-based technologies generally have similar urban emissions. The U.S. average electricity-based GH<sub>2</sub> FCVs could result in increased urban NO<sub>x</sub> emissions.

The significantly high urban WTT NO<sub>x</sub> emissions for the six petroleum-based systems are attributable to the fact that a significant number of U.S. petroleum refineries are located within urban areas — in fact, we estimated that 67% of the U.S. refinery capacity is located within U.S. urban areas. NO<sub>x</sub> emissions from these refineries are counted as urban NO<sub>x</sub> emissions. On the other hand, plants for FT diesel, methanol, hydrogen, and ethanol production are generally located outside of urban areas. Nationwide, we estimated that 39% of oil-fired electric power plant capacity, 43% of NG-fired capacity, and 16% of coal-fired capacity are located within U.S. urban areas. NO<sub>x</sub> emissions from these urban power plants contribute to the high WTT urban NO<sub>x</sub> emissions from electricity-derived hydrogen pathways. To control urban NO<sub>x</sub> emissions, consideration needs to be given to locating facilities in areas farther away from urban areas. In fact, this has been done in some of the major U.S. cities in the past in order to control urban emissions.

Although both total and urban WTW NO<sub>x</sub> emissions are subject to uncertainties, the uncertainties with urban NO<sub>x</sub> emissions are much greater than those with total NO<sub>x</sub> emissions. This is primarily driven by the great uncertainty in TTW NO<sub>x</sub> emissions during vehicle operations. That is, although future ICE technologies will meet stringent Tier 2 NO<sub>x</sub> standards, MOBILE and EMFAC models predict that ICE technologies will continue to be subject to on-road emission deteriorations and malfunctioning. However, it is anticipated that the degree of uncertainties in emissions for future vehicles will be less than that for past and current vehicles because technologies such as OBD systems and others will be able to reduce the number of high emitting vehicles.

#### 4.1.11 Total/Urban PM<sub>10</sub> Emissions

Figures 4-15 and 4-16 present WTW total and urban PM<sub>10</sub> emissions for the 18 vehicle/fuel systems. As Figure 4-15 shows, the U.S. average electricity-derived GH<sub>2</sub> FCVs increase total PM<sub>10</sub> emissions by about ten times over the emissions of the baseline gasoline technology. This is because (1) more than 50% of U.S. electricity is generated in coal-fired power plants, which have high PM<sub>10</sub> emissions; and (2) PM<sub>10</sub> emissions associated with coal mining and cleaning are high. On the other hand, when NG CC or renewable electricity is used to produce GH<sub>2</sub>, total PM<sub>10</sub> emissions are actually reduced.

E85 vehicles fueled with ethanol from corn have the next-highest total PM<sub>10</sub> emissions because farming equipment (such as diesel tractors) and ethanol plants produce a large amount of PM<sub>10</sub> emissions. Note that PM<sub>10</sub> emissions from agricultural field dusts are not included in estimates of ethanol PM<sub>10</sub> emissions. The two cellulosic ethanol systems (ICE and fuel-cell technology) have relatively high PM<sub>10</sub> emissions, again because of high PM<sub>10</sub> emissions from farming equipment and cellulosic ethanol plants (although, in this case, the share of farming equipment's PM<sub>10</sub> emissions is smaller because fewer farming activities are involved in biomass farming than in corn farming).

Table 4-4 presents shares of the PM<sub>10</sub> emissions for hydrogen-fueled ICEs and FCVs. Similar to NO<sub>x</sub> emissions, hydrogen production, compression, or liquefaction can account for a large amount of the WTW PM<sub>10</sub> emissions, depending on the hydrogen production pathways.

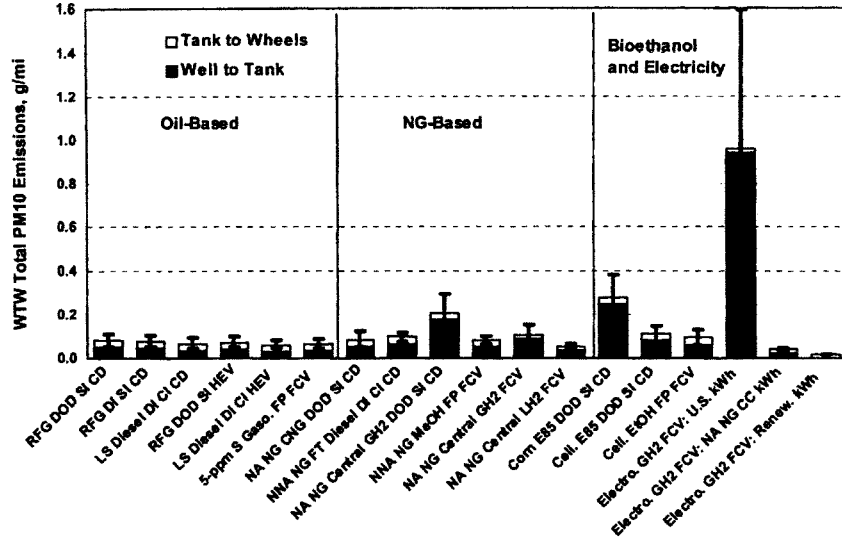


Figure 4-15 WTW Total PM<sub>10</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

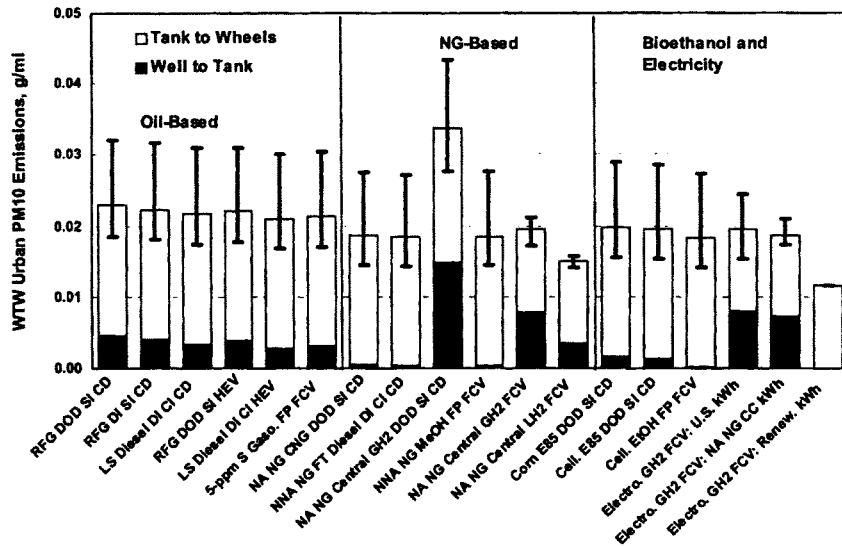


Figure 4-16 WTW Urban PM<sub>10</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

**Table 4-4 Shares of PM<sub>10</sub> Emissions by Hydrogen Production, Compression, and Liquefaction for Hydrogen-Fueled ICEs and FCVs**

Production Method/ Propulsion Type	Total PM <sub>10</sub> Emissions					Urban PM <sub>10</sub> Emissions				
	Share, %					Share, %				
	WTW, gpm	PTW	H <sub>2</sub> Production	H <sub>2</sub> Compression or Liquefaction	Other	WTW, gpm	PTW	H <sub>2</sub> Production	H <sub>2</sub> Compression or Liquefaction	Other
NA NG Central GH <sub>2</sub>										
ICE	0.186	16.7	30.2	46.5	6.7	0.035	55.3	39.4	4.2	1.0
FCV	0.097	19.1	29.3	45.1	6.5	0.02	59.4	35.8	3.8	0.9
NA NG Central LH <sub>2</sub>										
ICE	0.102	31.1	56.5	6.4	6.0	0.025	74.8	21.4	2.5	1.4
FCV	0.055	34.9	53.4	6.1	5.6	0.015	77.8	18.8	2.2	1.2
NA NG Station GH <sub>2</sub>										
ICE	0.188	16.5	45.5	36.3	1.7	0.063	31.2	66.7	1.9	0.1
FCV	0.098	19.0	44.1	35.3	1.6	0.034	35.0	63.1	1.8	0.1
NA NG Station LH <sub>2</sub>										
ICE	0.655	4.6	12.7	82.1	0.6	0.071	27.4	58.6	13.4	0.7
FCV	0.333	5.4	12.6	81.4	0.6	0.038	30.9	55.8	12.7	0.6
Electrolysis GH <sub>2</sub> : U.S. Electricity Generation Mix										
ICE	1.566	1.9	93.8	4.3	0.0	0.046	42.0	55.5	2.5	0.0
FCV	0.795	2.3	93.5	4.3	0.0	0.025	46.1	51.6	2.4	0.0
Electrolysis LH <sub>2</sub> : U.S. Electricity Generation Mix										
ICE	2.078	1.5	71.4	26.3	0.9	0.055	35.4	46.8	17.2	0.6
FCV	1.052	1.7	71.2	26.2	0.9	0.029	39.3	44.0	16.2	0.5

Of the six NG-based systems, GH<sub>2</sub> ICEs result in increased PM<sub>10</sub> emissions because of the high WTT total PM<sub>10</sub> emissions, which are, in turn, caused primarily by electricity use for GH<sub>2</sub> compression (we assumed that U.S. average electricity would be used for hydrogen compression). On the other hand, the increase in PM<sub>10</sub> emissions by GH<sub>2</sub> FCVs is smaller than that for GH<sub>2</sub> ICEs because efficient FCVs require less GH<sub>2</sub> per mile than ICEs. The increase in PM<sub>10</sub> emissions by CNG vehicles is caused by electricity use for NG compression. The increase by FT diesel ICEs is attributable to PM<sub>10</sub> emissions from production and across-ocean transportation of FT diesel (we assumed that FT diesel would be produced outside of North America with non-North American NG). The relatively small PM<sub>10</sub> emissions for LH<sub>2</sub> FCVs are a result of NG being the sole energy source for hydrogen production and liquefaction. That is, U.S. average electricity was not used in the LH<sub>2</sub> pathway.

Figure 4-15 shows that all 18 systems have TTW PM<sub>10</sub> emissions. This is because our estimates of TTW PM<sub>10</sub> emissions include tailpipe exhaust emissions (zero for direct-hydrogen FCVs) and brake and tire wear PM<sub>10</sub> emissions (see Section 2).

Among the six petroleum-based systems, total PM<sub>10</sub> emissions are similar.

Figure 4-16 shows WTW urban PM<sub>10</sub> emissions for the 18 systems, which are a small fraction of WTW total PM<sub>10</sub> emissions. Because electricity is used to compress GH<sub>2</sub>, use of GH<sub>2</sub> ICEs result in increased urban PM<sub>10</sub> emissions. As noted in a previous section, a large percentage of U.S. electric power plants are located within urban areas. Similarly, FCVs with GH<sub>2</sub> from U.S. average electricity have high urban PM<sub>10</sub> emissions. Except from GH<sub>2</sub>-based systems, WTT emissions account for the majority of WTW urban PM<sub>10</sub> emissions. Brake and tire wear are responsible for WTT urban PM<sub>10</sub> emissions from direct-hydrogen FCVs. Inclusion of brake and tire wear PM<sub>10</sub> emissions causes smaller variations in WTW PM<sub>10</sub> emissions among the 18 systems.

**4.1.12 Total/Urban SO<sub>x</sub> Emissions**

Figures 4-17 and 4-18 present WTW total and urban SO<sub>x</sub> emissions, respectively, for the 18 systems. For total SO<sub>x</sub> emissions, use of U.S. average electricity for GH<sub>2</sub> production via electrolysis results in huge increase in SO<sub>x</sub> emissions. However, if NG CC or renewable electricity is used for hydrogen production, SO<sub>x</sub> emissions could remain the same or decrease, relative to the emissions of the baseline gasoline ICE technology. Corn ethanol ICEs and NG-based GH<sub>2</sub> ICEs could result in increased total SO<sub>x</sub> emissions. In the former case, the increase is caused by SO<sub>x</sub> emissions from farming equipment and in ethanol plants. In the latter case, the increase is caused by the use of electricity for hydrogen compression. Other technologies have similar total SO<sub>x</sub> emissions.

Figure 4-18 shows WTW urban SO<sub>x</sub> emissions, which are dominated by WTT urban SO<sub>x</sub> emissions. This is because, for our simulation target year of 2016, fuel sulfur content will be 30 and 15 ppm in gasoline and diesel, respectively. Consequently, TTW SO<sub>x</sub> emissions, which are formed from sulfur in a fuel, will

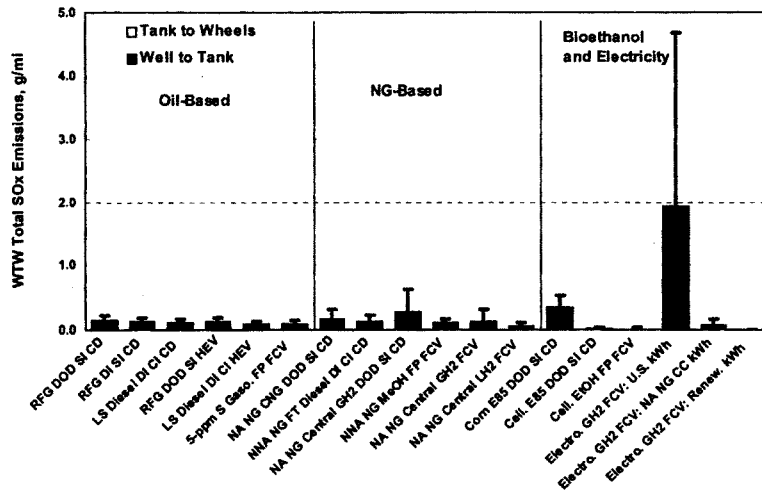


Figure 4-17 WTW Total SO<sub>x</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

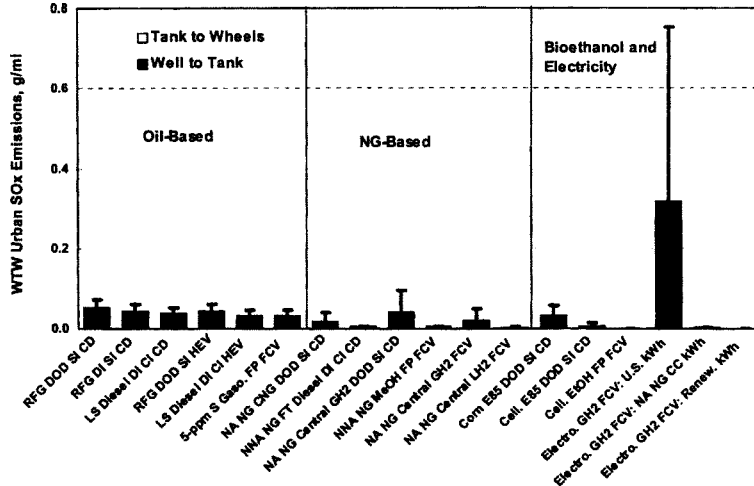


Figure 4-18 WTW Urban SO<sub>x</sub> Emissions of 18 Vehicle/Fuel Systems (g/mi)

be minimal in the future. Again, use of U.S. average electricity for hydrogen production results in huge urban SO<sub>x</sub> emissions (because a large percentage of U.S. electric generation capacity occurs within U.S. urban areas).

Of the six petroleum-based systems, WTW urban SO<sub>x</sub> emissions (virtually WTT urban emissions) are about the same. Six systems (FT diesel ICEs, methanol FCVs, LH<sub>2</sub> FCVs, cellulosic ethanol ICEs, cellulosic FCVs, and renewable electricity-derived GH<sub>2</sub> FCVs) have almost zero WTW urban SO<sub>x</sub> emissions. This is because (1) the WTT stage generates zero SO<sub>x</sub> emissions (in the case of renewable electricity-derived GH<sub>2</sub>) or (2) SO<sub>x</sub> emissions occur outside of U.S. urban areas (in the case of the other five systems).

#### 4.2 Specific Issues: Well-to-Wheels Results for Selected Vehicle/Fuel Systems

Section 4.1 presents results for all 17 items analyzed in this study for a set of 18 representative vehicle/fuel systems (of a total of 124 systems analyzed). The purpose of Section 4.1 was to provide general comparisons of advanced vehicle technologies and new transportation fuels. Many WTW studies have examined some specific issues. With the large amount of data generated from GREET simulations of the 124 vehicle/fuel systems, some specific issues of interest could be analyzed in detail. This section presents comparisons of the vehicle/fuel systems analyzed, with a focus on some specific issues: type of energy source; GHG, CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions, vehicle hybridization benefits; use of NA and NNA NG for fuel production; benefits of hybridization of ICE and fuel cell technologies; and comparisons of hydrogen production pathways, renewable vs. nonrenewable fuels, and selected NG-based fuel pathways.

#### 4.2.1 WTW Energy Use Results by Type of Energy Sources

In Section 4.1, we presented, for 18 vehicle/fuel systems, WTW total energy use, fossil energy use, and petroleum energy use separately in Figures 4-1, 4-3, and 4-4. We emphasized that, when renewable energy sources are involved, total energy use may not provide meaningful results when comparing the energy effects associated with different vehicle/fuel systems. To clearly demonstrate differences in energy use results by the three energy types (total energy [TE], fossil energy [FE], and petroleum energy [PE]), Figure 4-19 presents energy use by the three types of energy together for 15 selected vehicle/fuel systems.

Of the six selected petroleum-based systems, the patterns in energy use changes are similar for total energy use, fossil energy use, and petroleum use. Use of the results for any of the three energy types would lead to similar conclusions concerning the energy effects of the six petroleum-based technologies.

Of the six selected NG-based systems, the results for total energy use and fossil energy use are similar. This is because, for these pathways, the majority (if not all) of the energy consumption is derived from NG, which is accounted for in calculations of both total energy use and fossil energy use. However, if researchers are interested in the potential petroleum displacement by these six systems, they need to concentrate on the results of WTW petroleum energy use. Not surprisingly, all six NG-based systems almost eliminate petroleum energy use, even though some of the systems have total energy use and fossil energy use results similar to those for the baseline gasoline ICE.

The results for the two bioethanol systems and one electrolysis GH<sub>2</sub> system show the distortion of energy impacts if only total energy results are presented. Although bioethanol, especially cellulosic ethanol, has higher total energy use than the baseline gasoline ICE, bioethanol actually reduces fossil energy use and petroleum energy use significantly. If depletion of energy resources is a concern, we should focus on the fossil energy use results. If a reduction in petroleum use is a major U.S. goal, we should focus on the results of petroleum use. For GH<sub>2</sub> produced with U.S. average electricity, while the difference between total energy use and fossil energy use is small, the difference between the two on the one hand and petroleum use on the other hand is huge.

Some past WTW studies presented WTW energy efficiencies for various vehicle/fuel systems. The efficiencies in those studies were generally based on total energy use. In Section 4.1, we questioned the validity of including renewable energy in comparing renewable and non-renewable energy sources. Figure 4-2 showed the arbitrary nature of accounting for Btus when different primary energy sources are involved. WTW energy efficiencies based on total energy use for renewable energy (such as bioethanol) could be very low, but such efficiencies may be misleading about the true energy effects of renewable energy.

On the other hand, some researchers may suggest that energy efficiencies for vehicle/fuel systems could be calculated from fossil energy use. While the results based on fossil energy use may accurately reflect the advantage of the “renewable” nature of renewable energy, such efficiencies could exceed 100%. Without careful examination, readers could immediately question the seemingly counterintuitive results. But in fact, the over-100% efficiencies based on fossil energy use should be interpreted as the enhancement factor of renewable energy in terms of extending fossil energy use.

Researchers face another technical challenge in calculating WTW energy efficiency — comparing the TTW efficiencies of vehicles with different sizes and weights. Two vehicles could have the same TTW energy efficiency, but one could be much heavier than the other. A result showing the same efficiency for

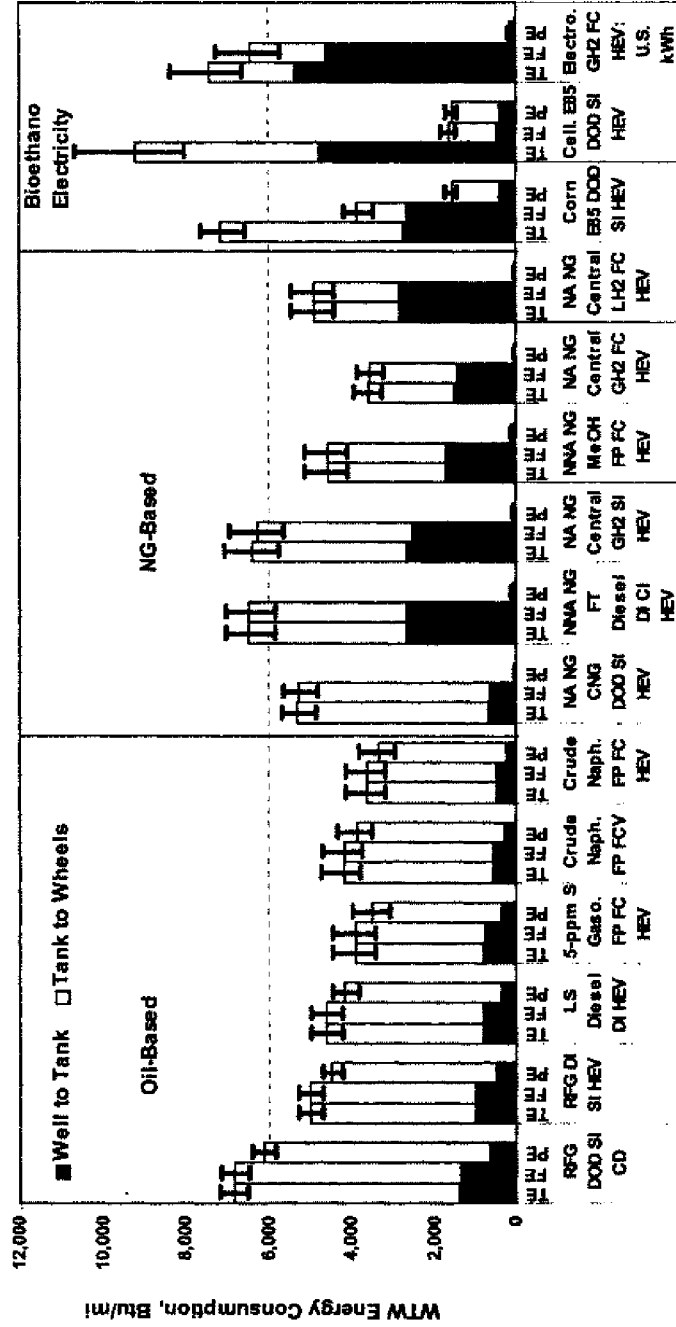


Figure 4-19 WTW Total Energy Use, Fossil Energy Use, and Petroleum Energy Use of Selected Vehicle/Fuel Systems (Btu/mi)

the two vehicles does not reveal the fact that the heavier vehicle could consume much more energy per mile driven than the lighter vehicle.

Because of these problems, we have not calculated WTW energy efficiencies (based on either total energy use or fossil energy use) for the vehicle/fuel systems that we evaluated in this study. Instead, we present per-mile energy use for the three energy types. We believe that this method provides readers with more meaningful results concerning the energy effects of advanced vehicle technologies and new transportation fuels. But we do present WTT efficiencies for fuel production pathways in Appendix D and TTT efficiencies for vehicle propulsion systems in Section 3 for information purposes. These efficiencies were calculated from total energy use results.

#### 4.2.2 WTW Emissions of GHGs, CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O

Figures 4-5 through 4-8 in Section 4.1 present emissions of GHGs, CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O separately for the 18 vehicle/fuel systems. We demonstrated there that a complete assessment of GHG emission impacts of vehicle technologies fueled with different fuels requires inclusion of CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions. To provide a clear comparison of the impacts of different GHGs, we present, for nine selected vehicle/fuel systems, emission results of GHGs (GWP-weighted CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O) and CO<sub>2</sub> together in Figure 4-20. Of the nine systems, the increases from CO<sub>2</sub> emissions to CO<sub>2</sub>-equivalent GHG emissions are not proportional. In particular, the increases for corn ethanol, cellulosic ethanol, and CNG systems are higher than for the other six systems.

Figure 4-21 shows emissions of CH<sub>4</sub> and N<sub>2</sub>O emissions for the nine selected systems. CH<sub>4</sub> emissions from CNG ICEs are significantly higher than those from other systems. The CH<sub>4</sub> emissions for CNG ICEs are generated during NG recovery, processing, and transmission. The U.S. average electricity-based GH<sub>2</sub> FCVs have relatively high CH<sub>4</sub> emissions because of CH<sub>4</sub> emissions that occur during coal mining.

The results for N<sub>2</sub>O emissions show that the two bioethanol systems have dramatically higher N<sub>2</sub>O emissions than the other seven systems. The N<sub>2</sub>O emissions for bioethanol are from nitrification and denitrification of nitrogen fertilizer in agricultural fields.

Figures 4-20 and 4-21 show the need to include CH<sub>4</sub> and N<sub>2</sub>O emissions in evaluating different transportation fuels, including CNG and ethanol. Some past studies included CO<sub>2</sub> emissions only in evaluating the climate change impacts associated with various vehicle/fuel systems. Exclusion of CH<sub>4</sub> and N<sub>2</sub>O emissions gives CNG and ethanol additional benefits that are not warranted. Furthermore, because of the distortion by CH<sub>4</sub> and N<sub>2</sub>O emissions among fuel types, patterns of relative GHG emission rankings of vehicle/fuel systems could be different from patterns of relative fossil fuel use rankings. Thus, GHG emissions and fossil fuel use need to be estimated separately in order to address both energy and GHG emission impacts of vehicle technologies and fuels. Fossil energy use results may not be a good surrogate for GHG emissions, especially when CNG and bioethanol are involved in the comparisons.

#### 4.2.3 Benefits of Vehicle Hybridization

This study includes three vehicle power plant technologies: SI engine, CI engine, and fuel cell. For each technology, we simulated conventional drive and hybrid electric vehicle configurations. We presented the fuel economics for different vehicle technologies in Section 3. We showed that the shift from a CD configuration to an HEV configuration for the same power plant technology helps improve vehicle fuel consumption. In Figures 4-22 through 4-25, we present the impacts of the improved fuel consumption achieved via vehicle hybridization on WTW energy and emission results.



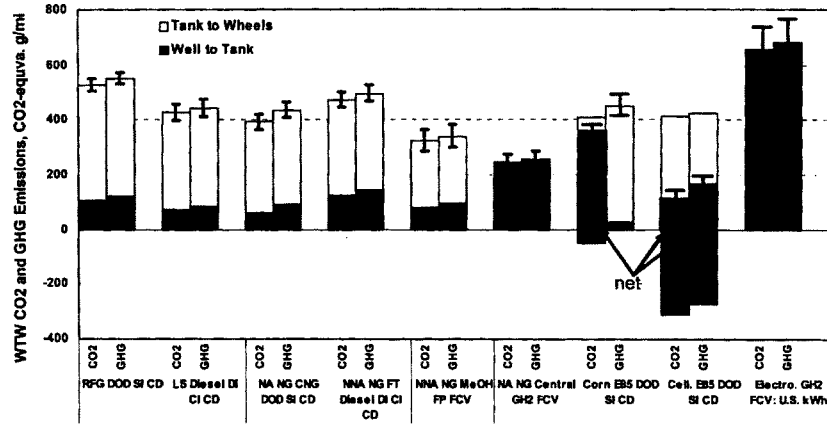


Figure 4-20 WTW GHG and CO<sub>2</sub> Emissions of Nine Vehicle/Fuel Systems (CO<sub>2</sub>-equivalent g/mi)

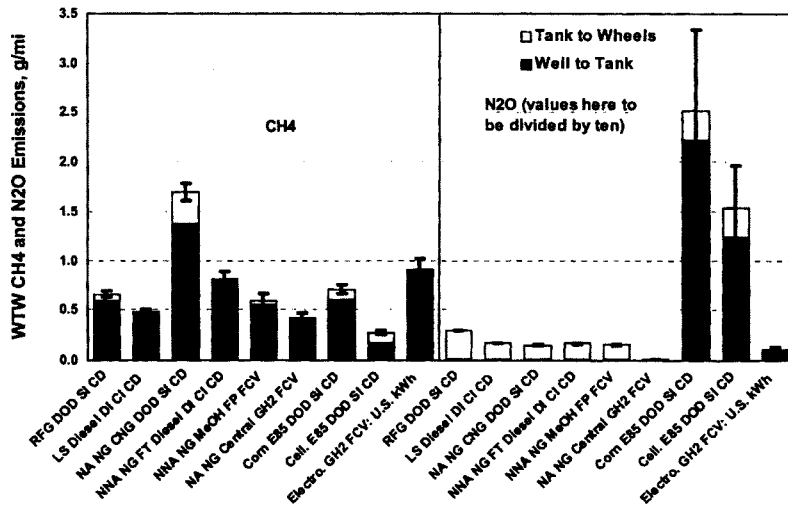


Figure 4-21 WTW CH<sub>4</sub> and N<sub>2</sub>O Emissions of Nine Vehicle/Fuel Systems (g/mi)

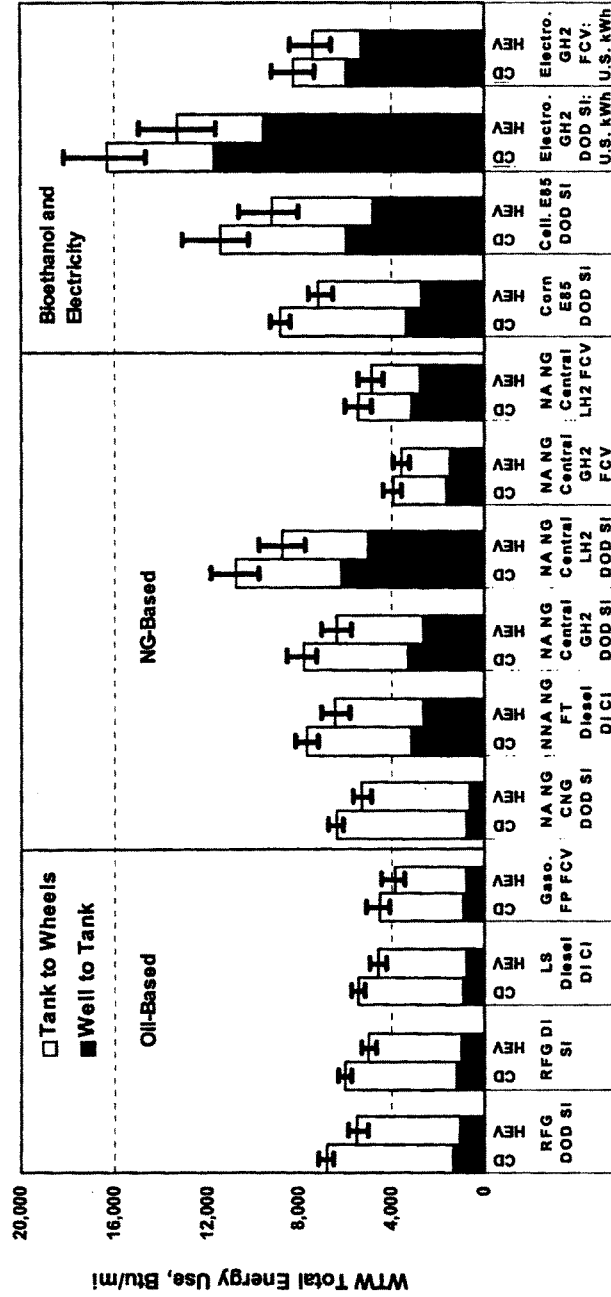


Figure 4-22 WTW Effects of Vehicle Hybridization: Total Energy Use (Btu/mi)

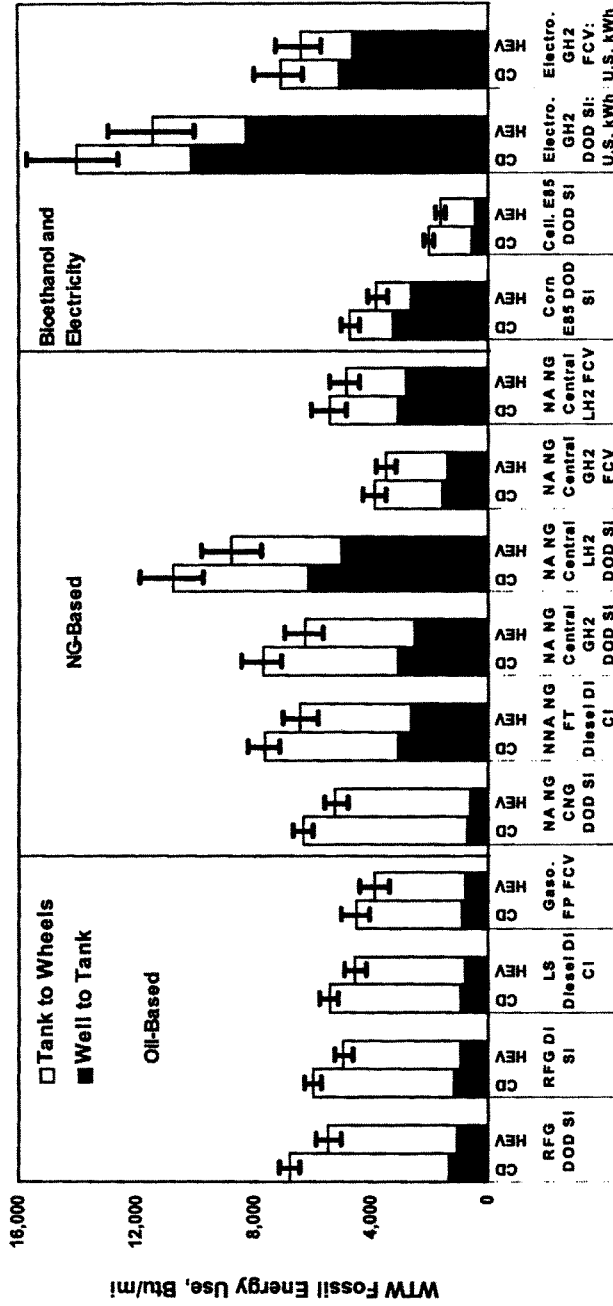


Figure 4-23 WTW Effects of Vehicle Hybridization: Fossil Energy Use (Btu/mi)

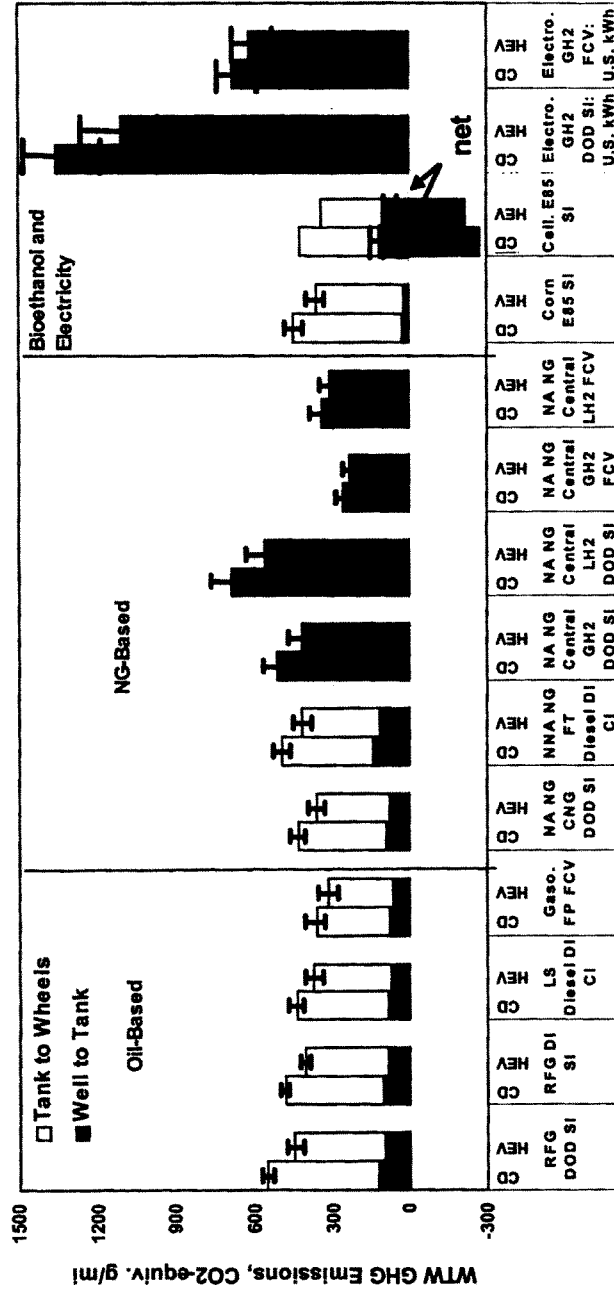


Figure 4-24 WTW Effects of Vehicle Hybridization: GHG Emissions (CO<sub>2</sub>-equivalent g/mi)

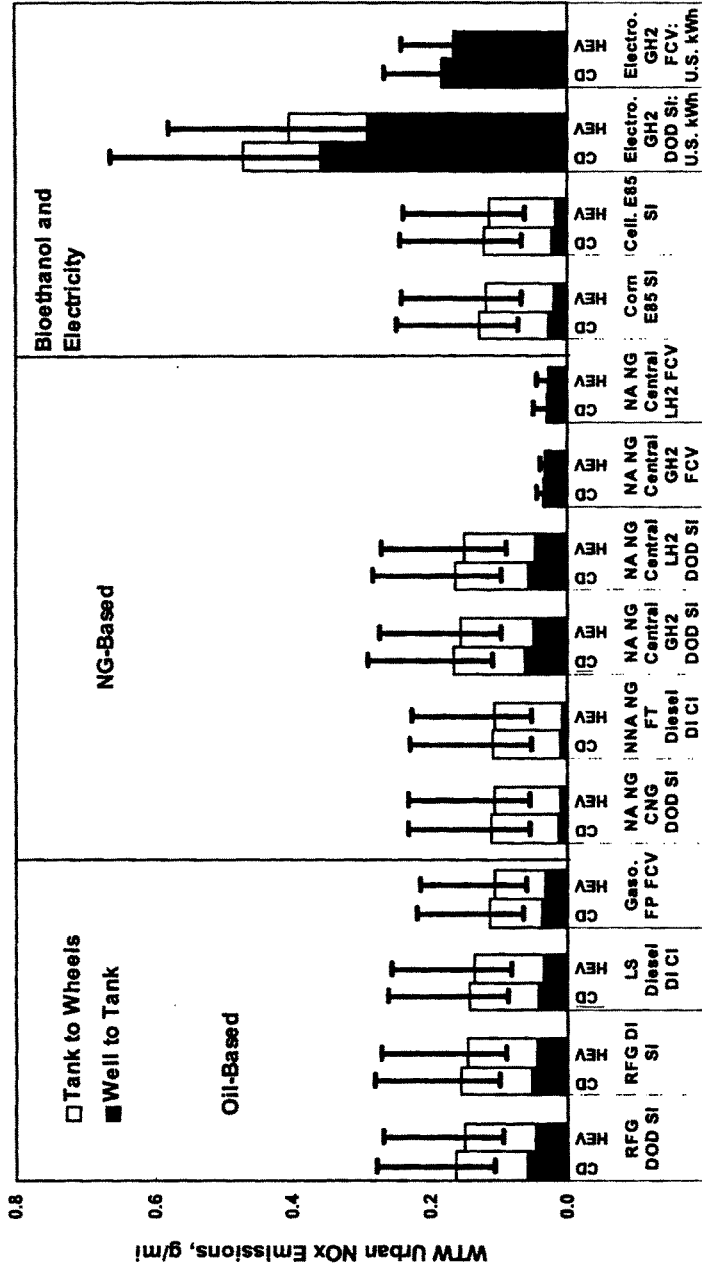


Figure 4-25 WTW Effects of Vehicle Hybridization: Urban NO<sub>x</sub> Emissions (g/mi)

We selected 14 pairs of vehicle/fuel systems. Each pair consists of the CD and HEV configuration. Figure 4-22 presents WTW total energy results, Figure 4-23 fossil energy use, Figure 4-24 GHG emissions, and Figure 4-25 urban NO<sub>x</sub> emissions.

The results show that vehicle hybridization helps reduce total and fossil energy use and GHG emissions. Figures 4-22 through 4-24 show that hybridization achieves larger reductions in per-mile energy use and GHG emissions for ICE technologies than it does for fuel cell systems. This is because, as discussed in Section 3, hybridization of ICEs achieves larger fuel consumption reductions than hybridization of FC systems. While WTW results here show that hybridization is more effective in reducing energy use and GHG emission with ICE systems, we realize that, in reality, the decision to hybridize FCVs will be made on the basis of costs, as well as energy and GHG emission benefits.

Figure 4-25 shows the impacts of hybridization on WTW urban NO<sub>x</sub> emissions for the 14 selected systems. Except for GH<sub>2</sub> FCVs with U.S. average electricity, hybridization has little effect on urban NO<sub>x</sub> emissions, primarily because WTW urban NO<sub>x</sub> emissions are dominated by TTW NO<sub>x</sub> emissions, which are regulated on a per-mile basis and are independent of the reductions in vehicle fuel consumption resulting from hybridization. For the electrolysis GH<sub>2</sub> system, reduction in energy use causes a reduction in per-mile NO<sub>x</sub> emissions attributable to electric power plants.

#### 4.2.4 Effects of Use of NA and NNA NG for Fuel Production

In the past 20 years, demand for NG in the United States has steadily increased. The NG supply in North America is already tight and will continue to be so in the future. If there is a large U.S. demand for NG-based transportation fuels (such as hydrogen, methanol, FT diesel, etc.), NG feedstocks could likely come from regions outside of North America. In this study, we analyzed WTW energy and emission impacts of producing transportation fuels from NA NG vs. from NNA NG.

Figures 4-26 through 4-30 present WTW energy and emission changes from NA NG to NNA NG for production of CNG, central GH<sub>2</sub>, station GH<sub>2</sub>, central LH<sub>2</sub>, and station LH<sub>2</sub>. The four hydrogen production options are applied to both SI engine-powered HEVs and FC-powered HEVs. In all cases, use of NNA NG in place of NA NG results in increased energy use and GHG emissions. But relative to fuel options and vehicle technologies, the increases attributable to the NG feedstock change are moderate. In addition, the five figures show the distinct energy use and GHG emissions reduction benefits of using fuel cell hybrid technologies relative to ICE hybrid technologies.

Figures 4-29 and 4-30 show WTW total and urban NO<sub>x</sub> emissions for the pairs of vehicle/fuel systems with NA NG and NNA NG feedstocks. Total NO<sub>x</sub> emissions are increased from NA NG to NNA NG when the same fuel is applied to a given technology. Total NO<sub>x</sub> emissions from ICE technologies are significantly higher than those from fuel cell technologies. The uncertainty level of total NO<sub>x</sub> emissions for hydrogen-fueled vehicle technologies is high, mainly because of the uncertainty surrounding NO<sub>x</sub> emissions from hydrogen production and hydrogen combustion in ICEs. On the other hand, the level of WTW urban NO<sub>x</sub> emissions is significantly lower than that of WTW total NO<sub>x</sub> emissions. Figure 4-30 also shows that a switch from NA NG to NNA NG does not necessarily result in increased urban NO<sub>x</sub> emissions because some of the NO<sub>x</sub> emissions associated with NNA NG-based fuel production could occur outside of North America, and thus outside of U.S. urban areas.

The results for urban NO<sub>x</sub> emissions in Figure 4-30 indicate two distinct trends. First, direct-hydrogen fuel cell technologies have much lower urban NO<sub>x</sub> emissions than hydrogen ICE technologies because

911

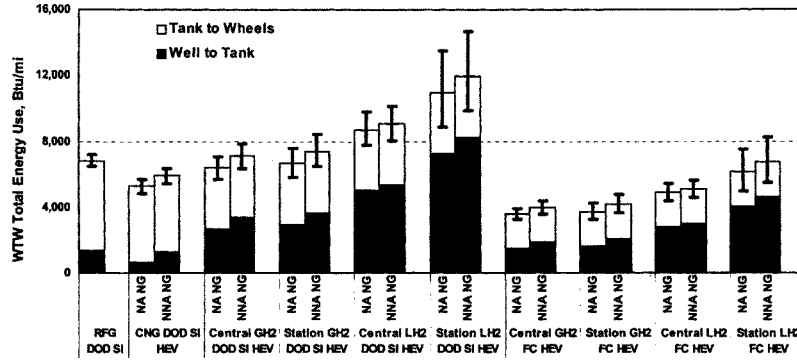


Figure 4-26 WTW Effects of North American NG vs. Non-North American NG: Total Energy Use (Btu/mi)

117

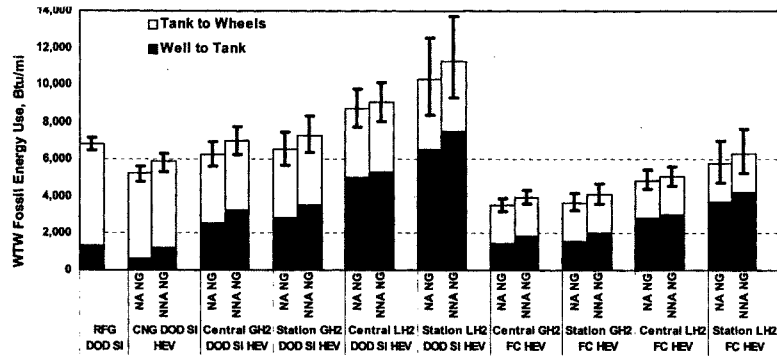


Figure 4-27 WTW Effects of North American NG vs. Non-North American NG: Fossil Energy Use (Btu/mi)

8/11

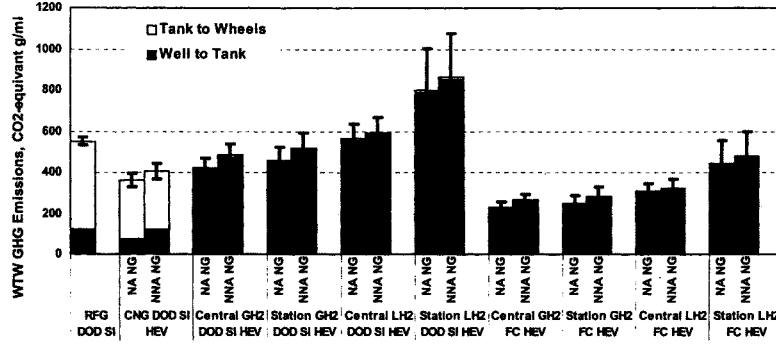


Figure 4-28 WTW Effects of North American NG vs. Non-North American NG: GHG Emissions (CO<sub>2</sub>-equivalent g/ml)

6/11

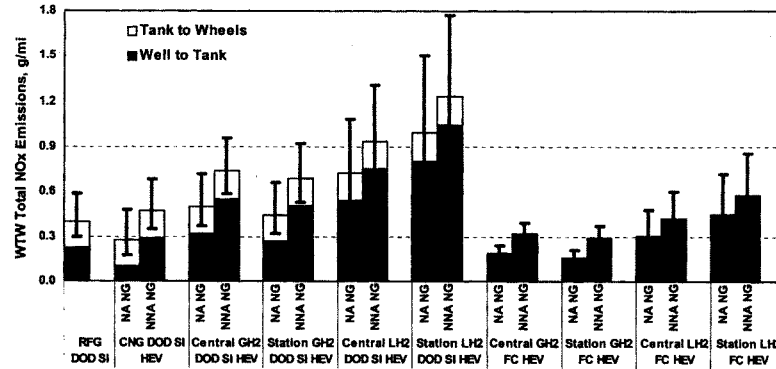


Figure 4-29 WTW Effects of North American NG vs. Non-North American NG: Total NO<sub>x</sub> Emissions (g/ml)



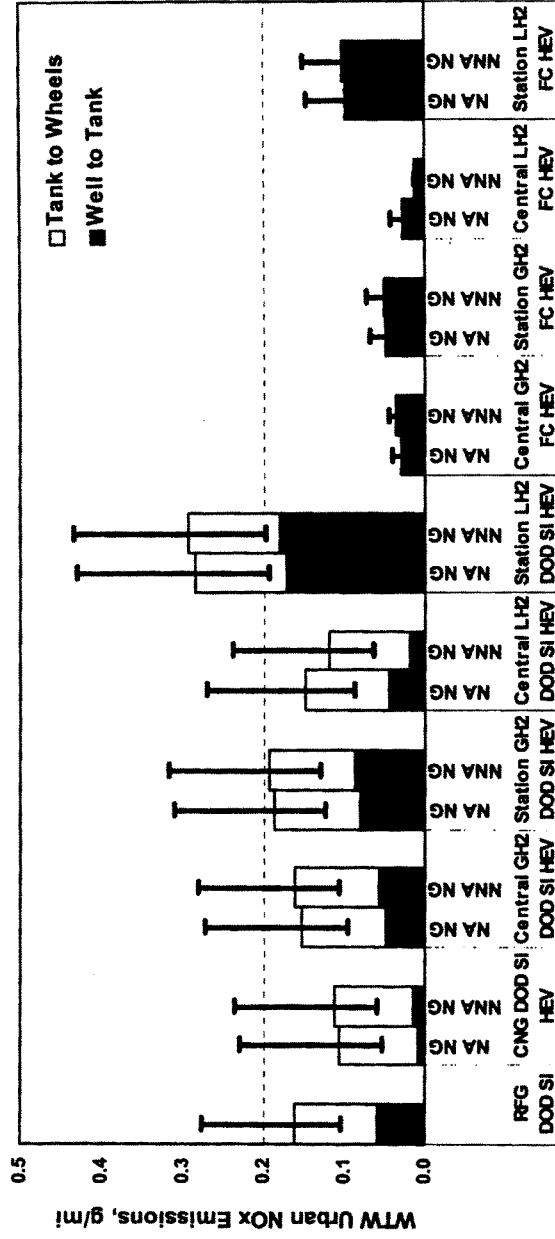


Figure 4-30 WTW Effects of North American NG vs. Non-North American NG: Urban NO<sub>x</sub> Emissions (g/mi)

the former eliminates TTW NO<sub>x</sub> emissions. Second, direct-hydrogen fuel cell technologies are subject to less uncertainty in WTW urban NO<sub>x</sub> emissions than hydrogen ICE technologies, primarily because a great deal of uncertainty is involved in TTW NO<sub>x</sub> emissions for hydrogen ICE technologies.

#### 4.2.5 WTW Energy and Emission Reduction Benefits of ICE HEVs and Fuel Cell HEVs

Figures 4-31 through 4-36 present comparisons of WTW energy and emission results of ICE HEVs and fuel cell HEVs. We selected 25 vehicle/fuel systems for the comparison of ICE and fuel cell hybrid technologies. Of the 25 systems, there are nine pairs of ICE and fuel cell HEVs (gasoline, FT diesel and FT naphtha, NG-based GH<sub>2</sub>, NG-based LH<sub>2</sub>, cellulosic ethanol, electrolysis GH<sub>2</sub> produced with U.S. average electricity, electrolysis LH<sub>2</sub> produced with U.S. average electricity, electrolysis GH<sub>2</sub> produced with NG CC electricity, and electrolysis LH<sub>2</sub> produced with NG CC electricity). Within each pair, the fuel cell power plant shows reduced energy use and GHG emissions relative to the ICE power plant because the former is more efficient than the latter.

Researchers have debated in some completed WTW studies whether fuel cell technologies are more efficient than diesel HEVs. Our results, illustrated in Figures 4-31 and 4-32, show that fuel cell HEVs fueled with gasoline, methanol, and NG-based GH<sub>2</sub> require less WTW total energy and fossil energy than diesel HEVs. Cellulosic-ethanol-fueled fuel cell HEVs have higher WTW total energy use, but lower WTW fossil energy use, than diesel HEVs. However, if hydrogen is produced via electrolysis pathways, fuel cell HEVs could consume more energy than diesel HEVs. The relative differences in GHG emissions between diesel HEVs and FCVs, shown in Figure 4-33, are similar to energy use differences. A notable exception is the ethanol-fueled fuel cell HEV, which has lower GHG emissions, but higher energy consumption, than diesel HEVs.

Figures 4-34 through 4-36 present the WTW urban emissions of VOCs, NO<sub>x</sub>, and PM<sub>10</sub>. For each pair of ICE and fuel cell power plants, the fuel cell technology has consistently lower emissions of the three pollutants (except for VOC emissions of FT diesel and naphtha; naphtha is more volatile than diesel).

Between diesel HEVs and fuel cell HEVs, fuel cell HEVs fueled with volatile fuels such as gasoline, methanol, and ethanol have higher WTW VOC emissions than diesel HEVs, because of evaporative emissions from the volatile fuels. For WTW urban NO<sub>x</sub> emissions, except for fuel cell HEVs fueled with U.S. average electricity-derived hydrogen, fuel cell HEVs have lower NO<sub>x</sub> emissions than diesel HEVs. For WTW urban PM<sub>10</sub> emissions, except for fuel cell HEVs fueled with electrolysis hydrogen, fuel cell HEVs have lower PM<sub>10</sub> emissions than diesel HEVs. However, the differences in urban PM<sub>10</sub> emissions between diesel HEVs and fuel cell HEVs are small because of the dilution effect of including brake and tire wear PM<sub>10</sub> emissions, which were assumed to be the same for all vehicle/fuel systems.

Our results show that, in most cases, fuel cell HEVs consume less energy and generate fewer emissions than diesel HEVs. Furthermore, for the same fuel pathway, the fuel cell power plant is always more efficient and less polluting than the ICE power plant. Furthermore, FCVs, especially those powered with hydrogen, offer the opportunity for the U.S. transportation sector to switch from petroleum-based gasoline and diesel to different transportation fuels.

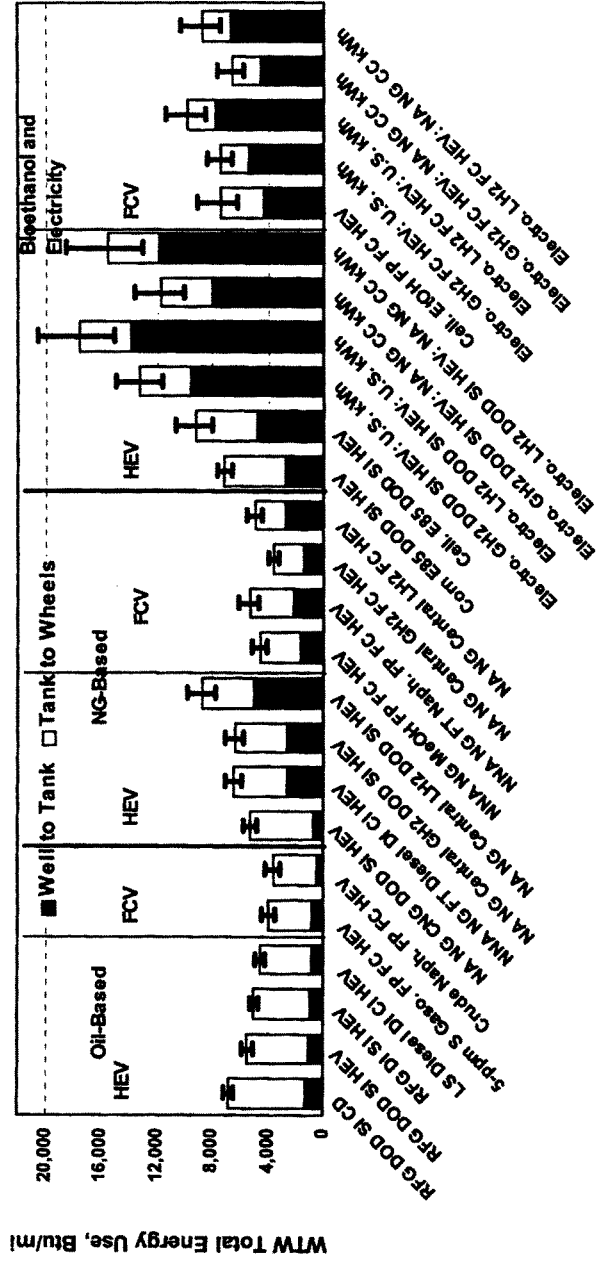


Figure 4-31 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Total Energy Use (Btu/mi)

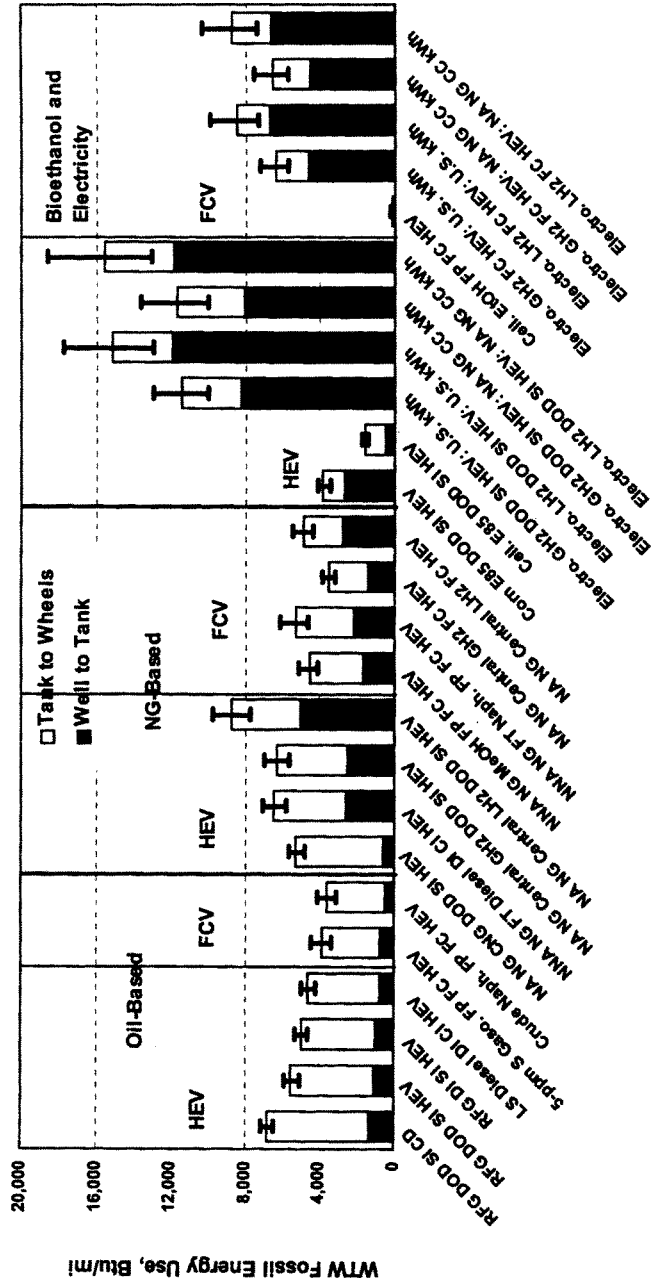


Figure 4-32 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Fossil Energy Use (Btu/mi)

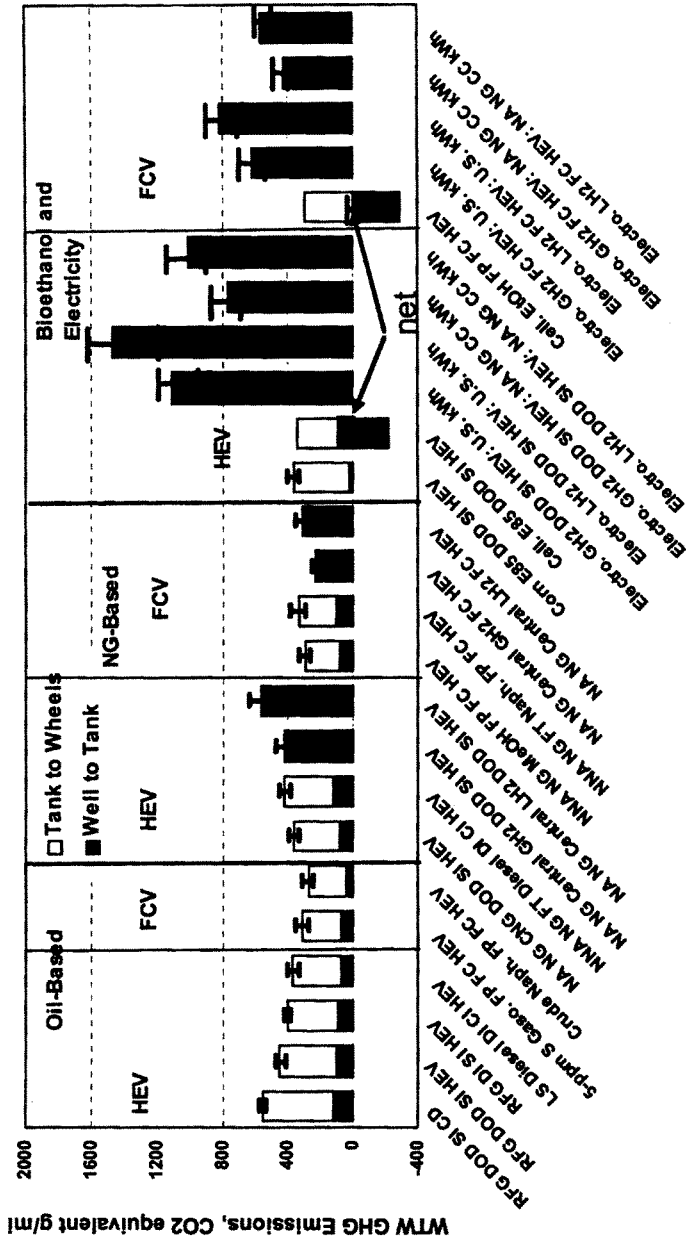


Figure 4-33 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: GHG Emissions (CO<sub>2</sub>-equivalent g/ml)

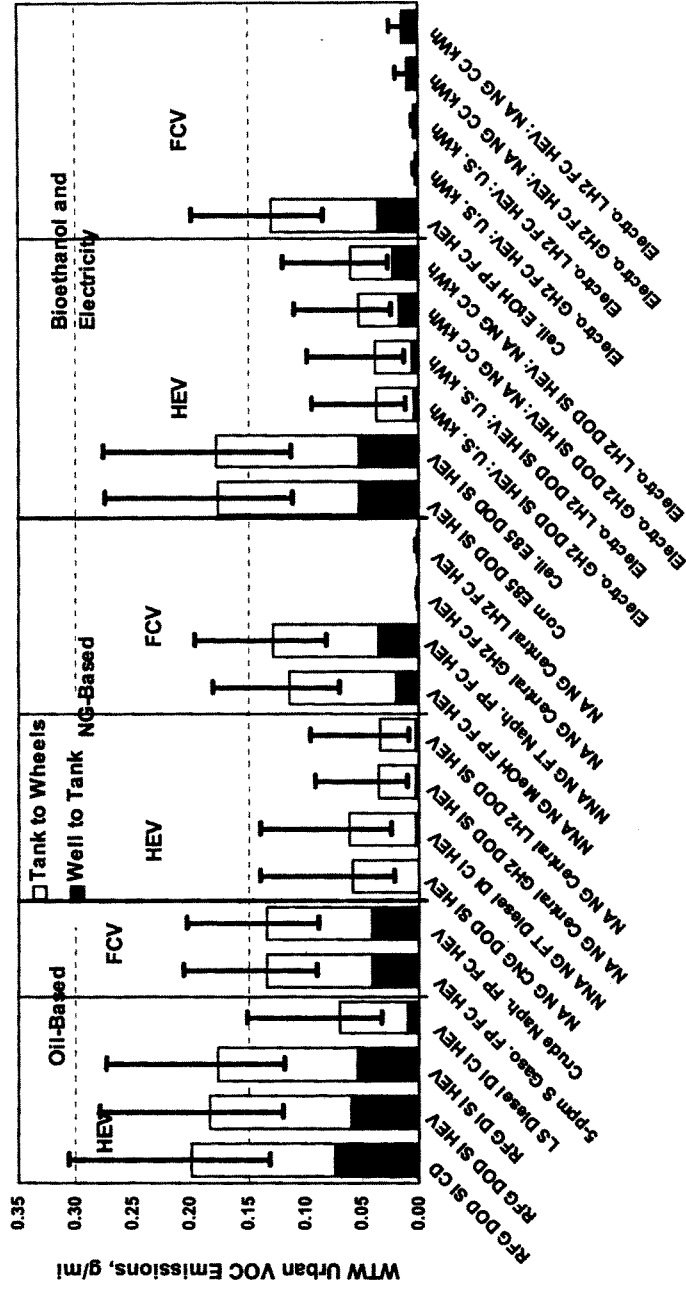


Figure 4-34 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban VOC Emissions (g/mi)

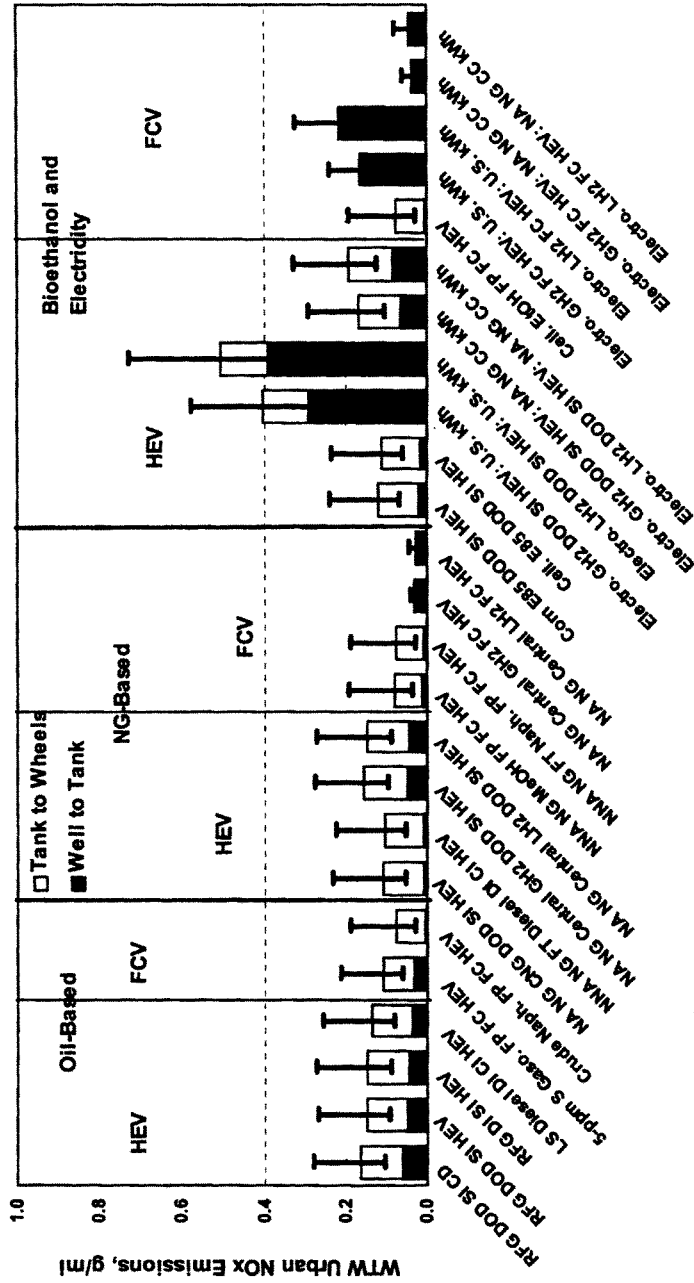


Figure 4-35 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban NO<sub>x</sub> Emissions (g/ml)

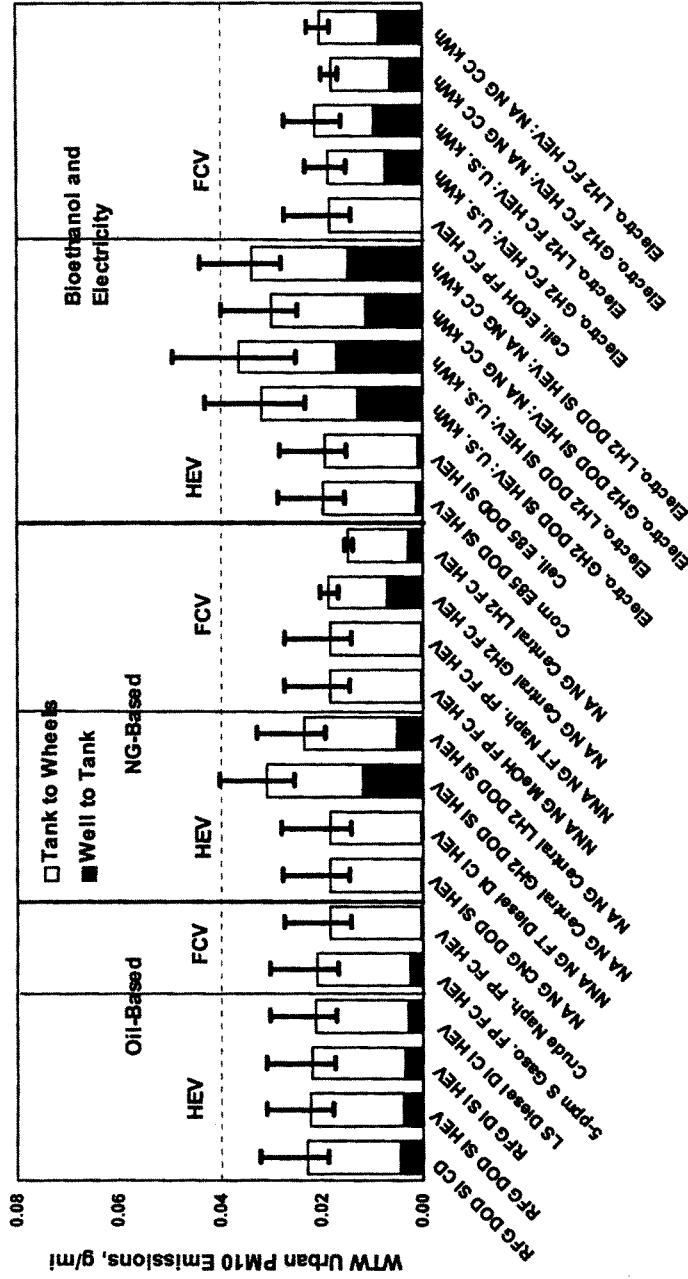


Figure 4-36 WTW Effects of ICE Hybrid and Fuel Cell Hybrid Technologies: Urban PM<sub>10</sub> Emissions (g/mi)



#### 4.2.6 Comparisons of Hydrogen Production Pathways

Among the 124 vehicle/fuel systems evaluated in this study, 97 are fueled with hydrogen. To demonstrate the WTW energy and emission effects of the different hydrogen production pathways, Figures 4-37 through 4-41 present WTW results for 25 hydrogen-fueled systems together with the results of the baseline gasoline ICE technology. Each figure is organized into four groups: central hydrogen production for ICE applications, refueling station hydrogen production for ICE applications, central hydrogen production for non-hybrid fuel cell applications, and refueling station hydrogen production for non-hybrid fuel cell applications.

Of the 25 hydrogen vehicle/fuel systems, there are 12 pairs of GH<sub>2</sub>- and LH<sub>2</sub>-fueled systems for which the production pathways are the same (GH<sub>2</sub> and LH<sub>2</sub> in each pair are arranged next to each other in Figures 4-37 through 4-41). For each pair, Figures 4-37 through 4-39 show that the GH<sub>2</sub>-fueled systems always have lower WTW energy use, GHG emissions, and total NO<sub>x</sub> emissions than the LH<sub>2</sub>-fueled systems. This is caused by the relatively large energy loss that occurs during hydrogen liquefaction with the LH<sub>2</sub> production options. However, Figures 4-40 and 4-41 show that levels of WTW urban emissions of NO<sub>x</sub> and PM<sub>10</sub> could be mixed between GH<sub>2</sub> and LH<sub>2</sub>. For example, 4 out of the 12 pairs show that a GH<sub>2</sub>-fueled system actually has higher urban NO<sub>x</sub> and PM<sub>10</sub> emissions than the comparable LH<sub>2</sub>-fueled system. These pairs include central production of GH<sub>2</sub> and LH<sub>2</sub> with NA NG and NNA NG for ICE and fuel cell applications. In all these cases, while LH<sub>2</sub> is produced in central plants outside of urban areas, GH<sub>2</sub> is compressed at refueling stations with U.S. average electricity, which involves a significant amount of urban NO<sub>x</sub> and PM<sub>10</sub> emissions. If electricity generated in less-polluting electric power plants located outside of U.S. urban areas is used for GH<sub>2</sub> compression, a GH<sub>2</sub>-fueled system would have fewer WTW urban NO<sub>x</sub> and PM<sub>10</sub> emissions than the comparable LH<sub>2</sub>-fueled system.

If NG is the feedstock for hydrogen production, hydrogen could be produced in central plants and transported to refueling stations for vehicle use. Alternatively, hydrogen could be produced in refueling stations to avoid the need for inadequate, expensive hydrogen transportation and distribution infrastructure. For hydrogen production from electricity via electrolysis, we assumed that electricity is transmitted to refueling stations, where hydrogen is produced. In fact, avoiding the need for hydrogen transportation and distribution infrastructure by using electrolysis hydrogen production at refueling stations is a distinct advantage of electrolysis hydrogen production options. Between central and refueling station production of hydrogen from NG, Figures 4-37 through 4-39 show that central production of GH<sub>2</sub> has very small benefits in reducing WTW energy use and emissions. The differences in energy use and emissions between central and refueling station production for LH<sub>2</sub> are quite noticeable.

Section 4.2.4 described the energy and emission differences between using NA NG and NNA NG to produce transportation fuels. Figures 4-37 through 4-41 show again that NNA NG-based hydrogen production has somewhat larger WTW energy use and emissions than NA NG-based hydrogen production.

The results illustrated in Figures 4-37 through 4-41 show that, for refueling station hydrogen production, electrolysis hydrogen produced with U.S. average electricity has higher energy use and emissions than those associated with station SMR hydrogen production from NG. As emphasized in previous sections, electricity sources for electrolysis hydrogen are the key factor in determining its energy and emission effects. If clean, renewable electricity is used to generate hydrogen in refueling stations, electrolysis hydrogen will indeed achieve large energy and emission reduction benefits.

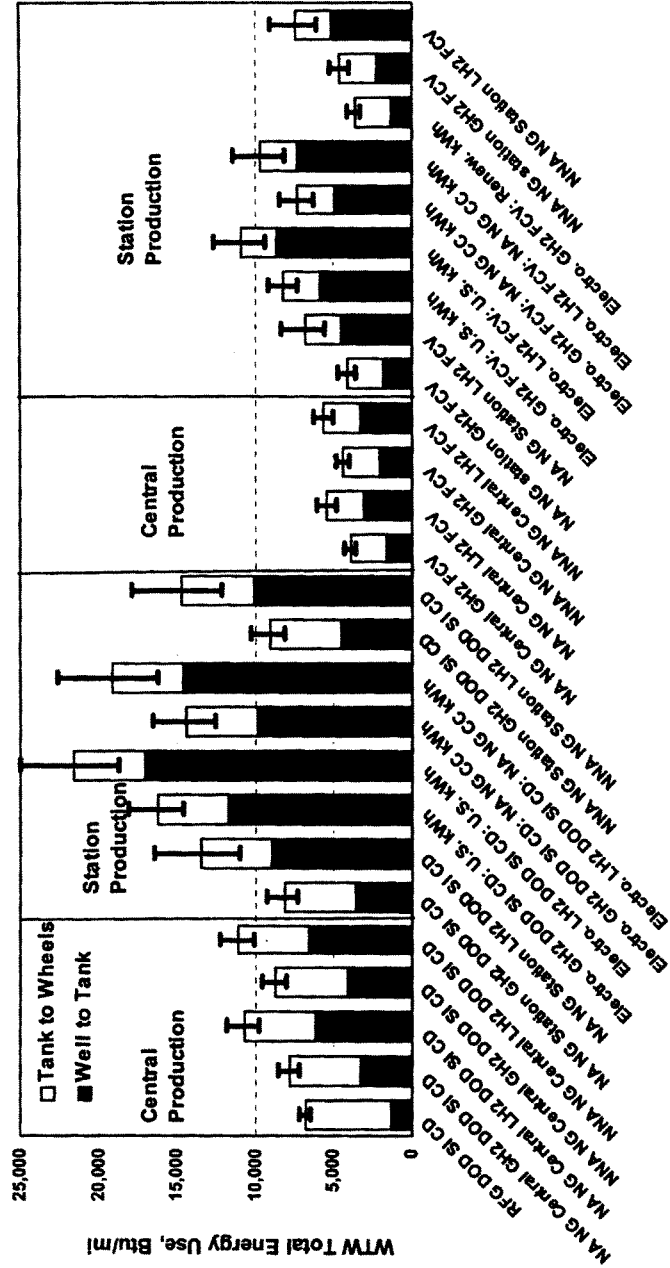


Figure 4-37 WTW Total Energy Use of Hydrogen Production Options (Btu/mi)

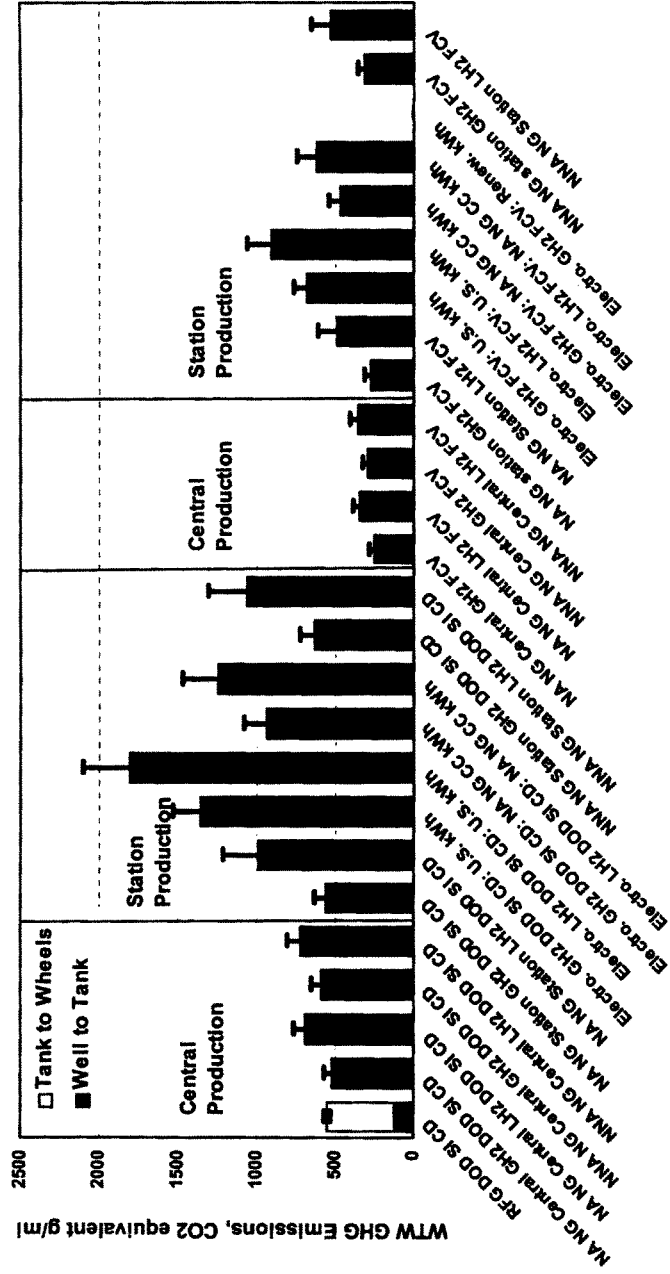


Figure 4-38 WTW GHG Emissions of Hydrogen Production Options (CO<sub>2</sub>-equivalent g/mi)

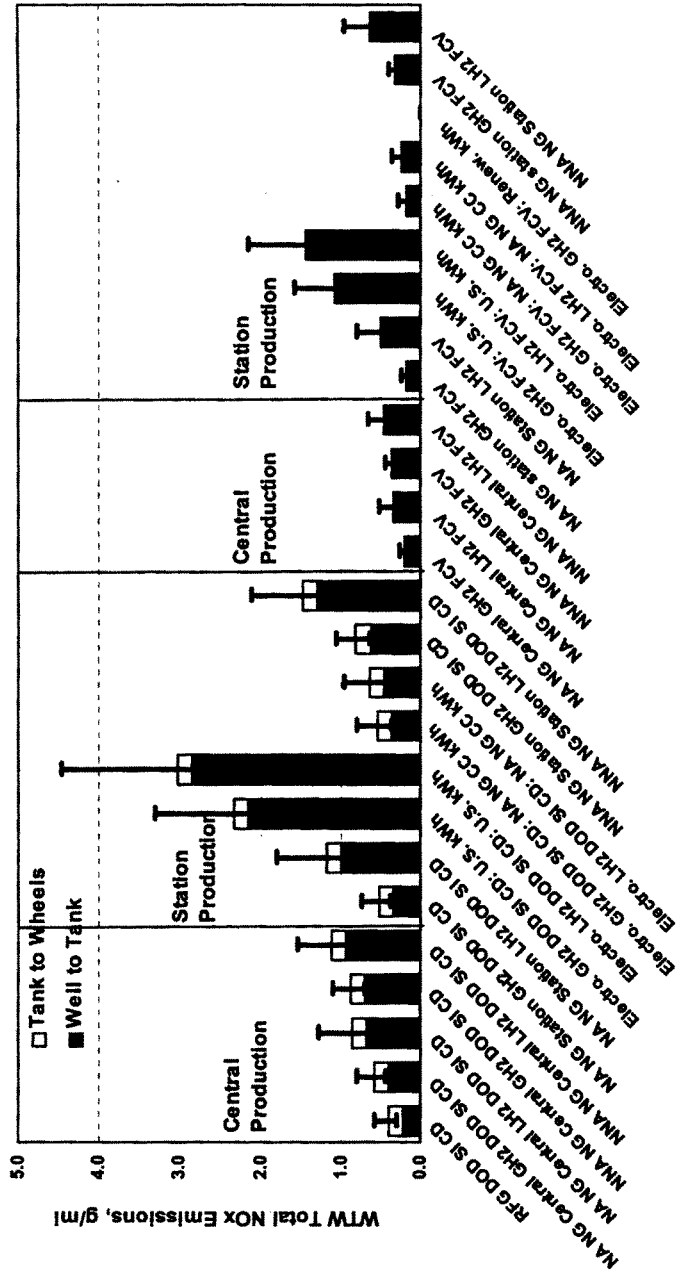


Figure 4-39 WTW Total NO<sub>x</sub> Emissions of Hydrogen Production Options (g/ml)

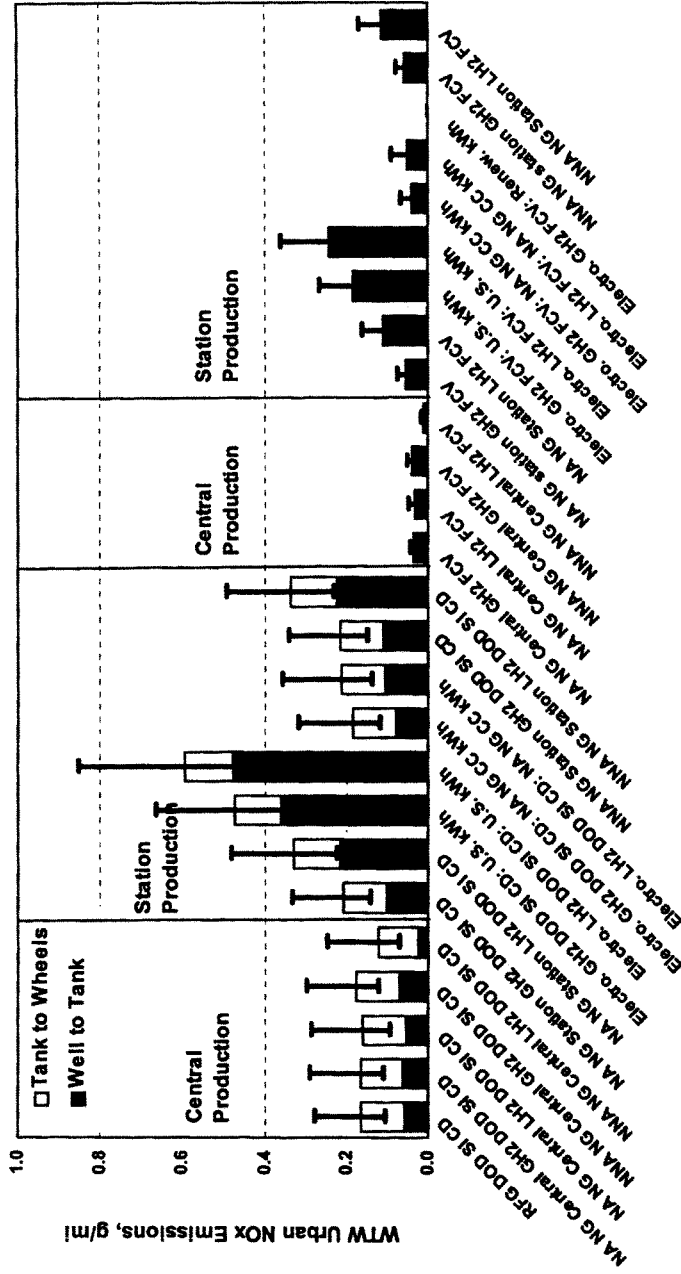


Figure 4-40 WTW Urban NO<sub>x</sub> Emissions of Hydrogen Production Options (g/ml)

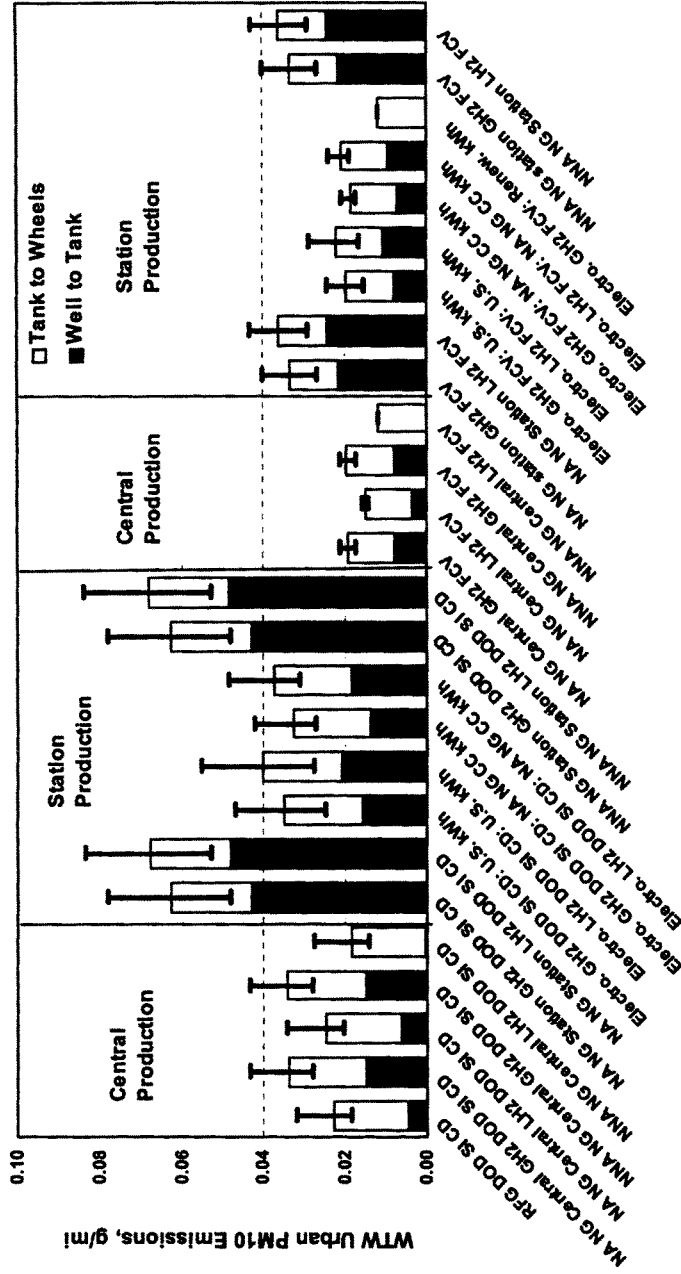


Figure 4-41 WTW Urban PM<sub>10</sub> Emissions of Hydrogen Production Options (g/mi)

The results here show that LH<sub>2</sub> pathways are less efficient and potentially more polluting than GH<sub>2</sub> pathways. But the choice between GH<sub>2</sub> or LH<sub>2</sub> may be determined primarily by hydrogen storage technologies, discussion of which is beyond the scope of this study.

The increase in energy use and emissions from central production to refueling station production are small for GH<sub>2</sub> and moderate for LH<sub>2</sub>. It appears that energy and emission impacts may not be a key factor in determining whether to use central or refueling station hydrogen production. The economics and availability of a hydrogen transportation and distribution infrastructure will be likely be the key factor for that decision. However, moving hydrogen production from central plants to refueling stations will move emissions of criteria pollutants closer to the population.

#### 4.2.7 Comparisons of Renewable Fuels and Non-Renewable Fuels

Of the 124 vehicle/fuel systems analyzed in this study, eight are fueled with renewable fuels (seven with bioethanol and one with renewable electricity-based GH<sub>2</sub>). Figures 4-42 through 4-46 present WTW energy and emission results of the eight renewable fuel-based systems, together with eight non-renewable fuel-based systems for similar vehicle technologies. Although Figure 4-42 shows that renewable fuels generally have higher WTW *total* energy use than non-renewable fuels, a significant portion of the total energy use by renewable fuel systems is indeed renewable energy. When results of WTW *fossil energy* use between renewable and non-renewable fuels are compared (such comparison is more appropriate than the comparison of total energy use), Figure 4-43 shows that renewable fuels achieve large reductions in WTW fossil energy use relative to those of non-renewable fuels.

The GHG emission results in Figure 4-44 reveal that the three systems fueled with corn ethanol achieve moderate GHG emission reductions. But the four systems fueled with cellulosic ethanol and the one renewable electricity GH<sub>2</sub> option achieve very substantial reductions in GHG emissions.

The WTT stage of corn and cellulosic ethanol pathways is associated with a large amount of NO<sub>x</sub> emissions because of the NO<sub>x</sub> emissions from farming equipment, nitrification and denitrification of nitrogen fertilizer, and ethanol production. Figure 4-45 shows large increases in WTW total NO<sub>x</sub> emissions by the seven ethanol systems. However, most of the WTT NO<sub>x</sub> emissions occur outside of U.S. urban areas. WTW urban NO<sub>x</sub> emissions (Figure 4-46) from the seven ethanol systems are comparable to those of the non-renewable fuel systems.

In summary, the energy and emission benefits of renewable fuels lie in reductions in fossil energy use, petroleum energy use, and GHG emissions.

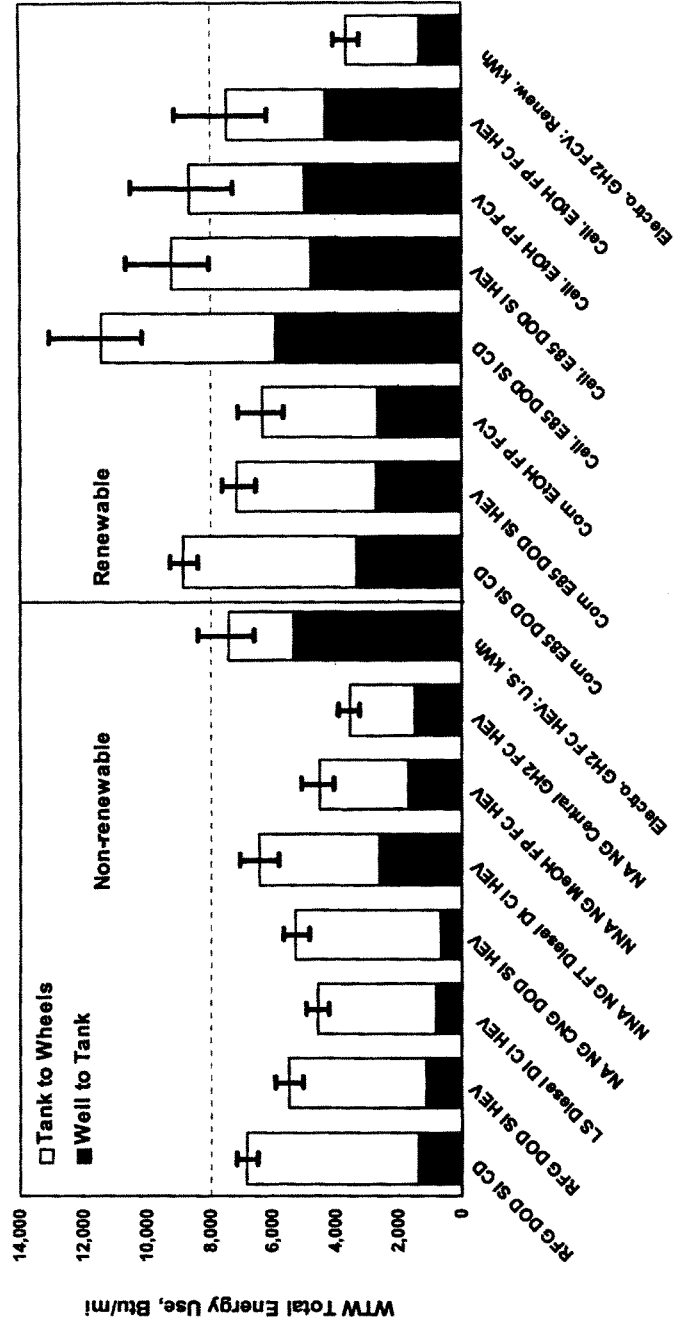


Figure 4-42 Comparison of Non-Renewable and Renewable Fuels: WTW Total Energy Use (Btu/mi)



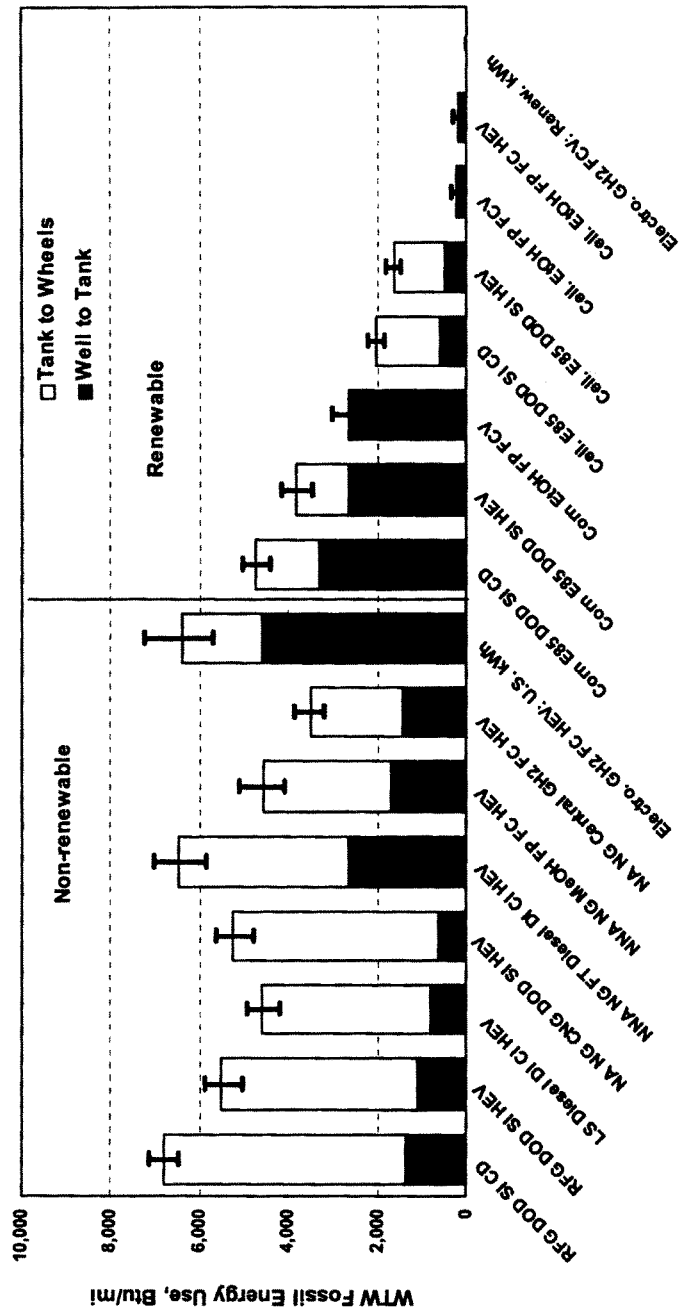


Figure 4-43 Comparison of Non-Renewable and Renewable Fuels: WTW Fossil Energy Use (Btu/mi)

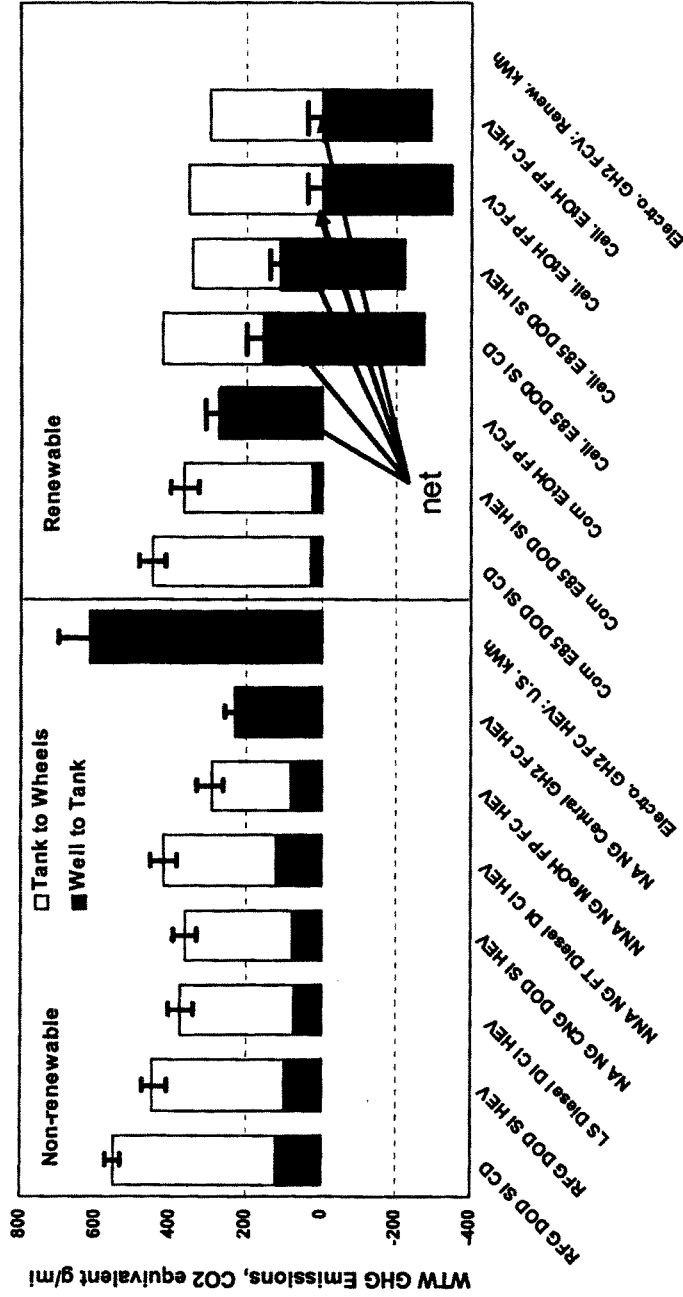


Figure 4-44 Comparison of Non-Renewable and Renewable Fuels: WTW GHG Emissions (CO<sub>2</sub>-equivalent g/mi)

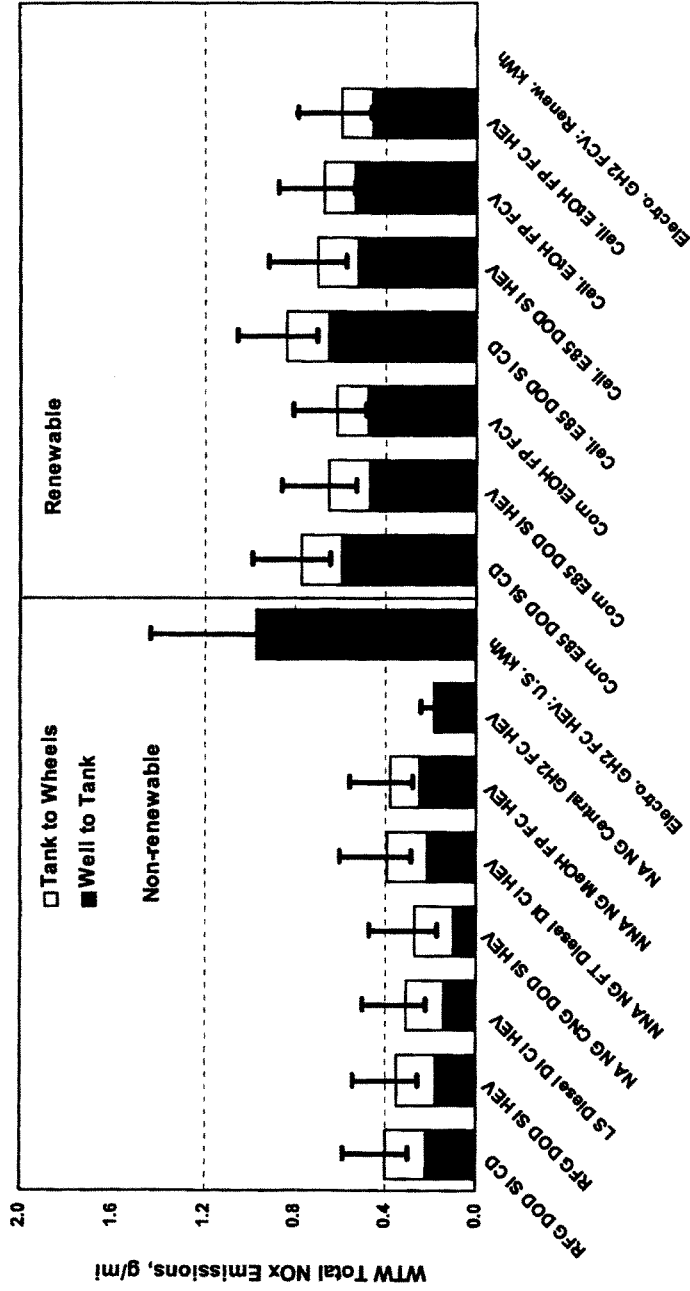


Figure 4-45 Comparison of Non-Renewable and Renewable Fuels: WTW Total NO<sub>x</sub> Emissions (g/mi)

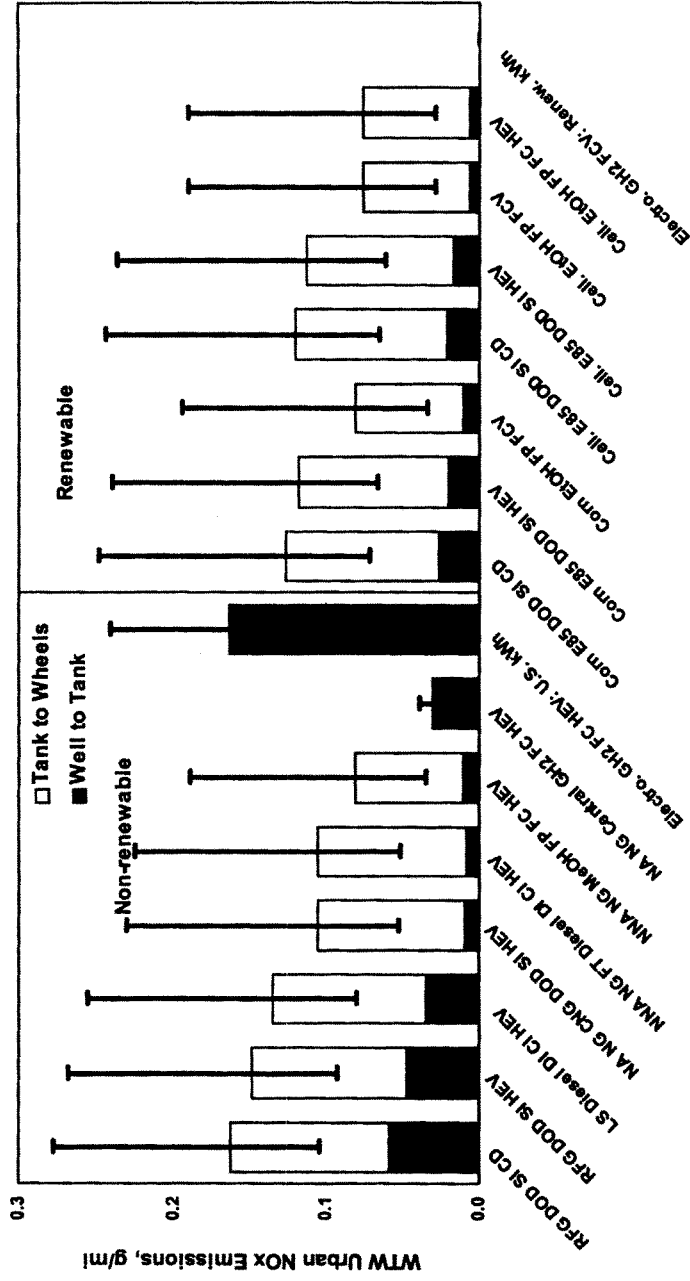


Figure 4-46 Comparison of Non-Renewable and Renewable Fuels: WTW Urban NO<sub>x</sub> Emissions (g/mi)

#### 4.2.8 Comparisons of Selected NG-Based Fuel Pathways

Our analysis includes many new transportation fuels that are produced from NG. NG-based transportation fuels can effectively reduce the reliance of the U.S. transportation sector on petroleum. But NG itself is a non-renewable energy source, and the NG supply in North America is and will continue to be limited. If the transportation fuels market is to be expanded to include NG-based fuels, one question is how to efficiently use NG to meet the transportation energy demand. Figures 4-47 through 4-51 present WTW energy and emission results for 22 vehicle/fuel systems fueled with NG-based fuels, together with the results for the baseline gasoline technology.

Figure 4-47 shows WTW fossil energy use for 23 vehicle/fuel systems. Relative to the baseline gasoline ICE technology, the majority of the NG-based systems reduce WTW fossil energy use. The exceptions are GH<sub>2</sub>-fueled ICEs, standalone FCVs fueled with GH<sub>2</sub> and LH<sub>2</sub> from NG CC electricity, fuel cell HEVs fueled with LH<sub>2</sub> from NG CC electricity, CNG ICEs fueled with NNA NG, and FT-diesel-fueled CI ICEs. In all these cases, WTT fossil energy losses are large enough to offset potential vehicle energy efficiency gains.

Our results reveal that, of the 22 NG-based vehicle/fuel systems, the most energy-efficient ways of using NG are in GH<sub>2</sub>-fueled FCVs, CNG HEVs, and methanol- and FT-naphtha-fueled FCVs.

Figure 4-48 shows WTW GHG emissions of the 22 NG-based systems. The patterns of WTW GHG emissions are similar to those for WTW fossil energy use.

Figure 4-49 shows WTW urban VOC emissions. Relative to the gasoline ICE technology, all NG-based systems reduce urban VOC emissions, primarily because of the low volatility of NG-based fuels. Figure 4-50 shows WTW urban NO<sub>x</sub> emissions, which are driven largely by vehicle technologies. ICE-based systems usually have higher urban NO<sub>x</sub> emissions than fuel-cell-based systems. The figure shows that there are large uncertainties in urban NO<sub>x</sub> emissions for the 22 systems. Figure 4-51 shows WTW urban PM<sub>10</sub> emissions. Urban PM<sub>10</sub> emissions for GH<sub>2</sub>-fueled ICEs and ICE HEVs are actually higher than those of the baseline gasoline ICE technology. This is because hydrogen production with SMR generates significant amounts of NO<sub>x</sub> emissions (see Section 2) and because U.S. average electricity was assumed for compressing GH<sub>2</sub>, which results in some urban NO<sub>x</sub> emissions because some of electric power plants are located within U.S. urban areas.

While control measures can be implemented to limit the potential increases in criteria pollutants for certain NG-based fuel pathways, high fossil energy use and GHG emissions for some of the technology options (such as LH<sub>2</sub> from NG combined-cycle electricity) in Figures 4-47 and 4-48 are caused by high NG use during fuel production. If the purpose is to efficiently use NG resources in the transportation sector, one may argue that inefficient NG-based fuel pathways should be avoided. However, the choice of a given NG-based fuel production pathway may be determined by the availability of fuel production and distribution infrastructure and the maturity of vehicle technologies. WTW energy efficiencies and GHG emissions should not be the sole factor in determining whether to eliminate certain fuel production pathways.

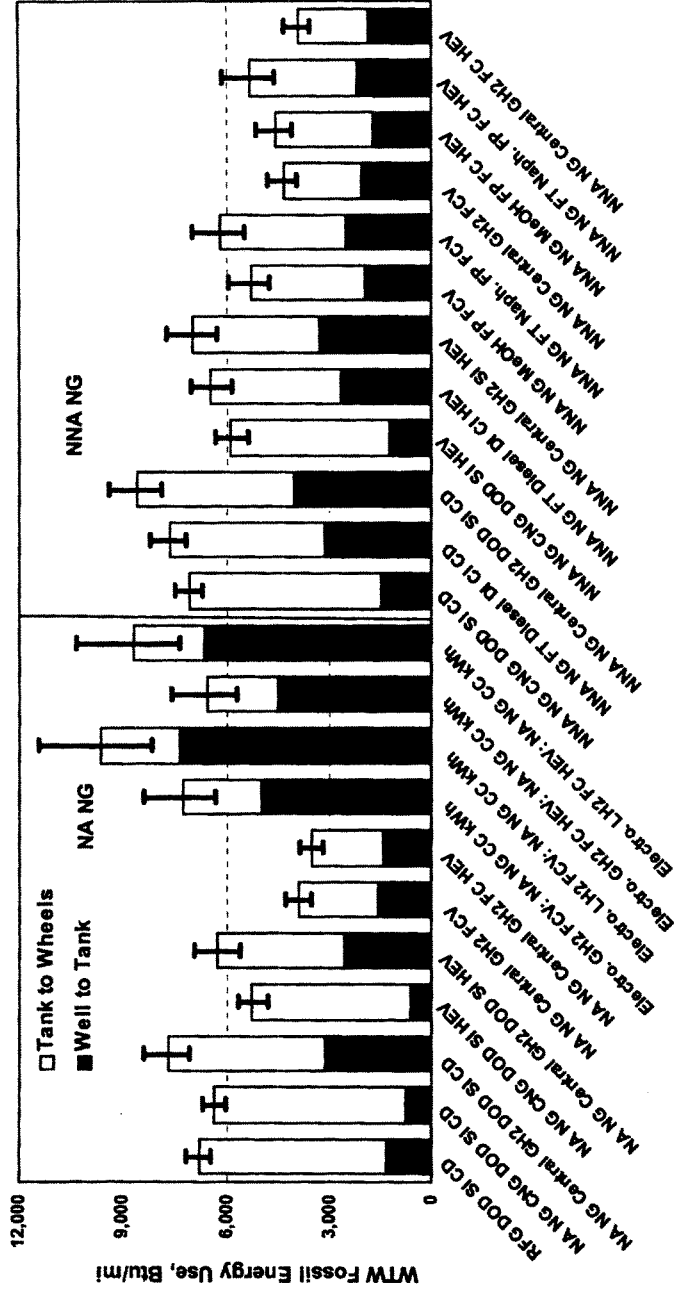


Figure 4-47 Comparison of NG-Based Systems: WTW Fossil Energy Use (Btu/mi)

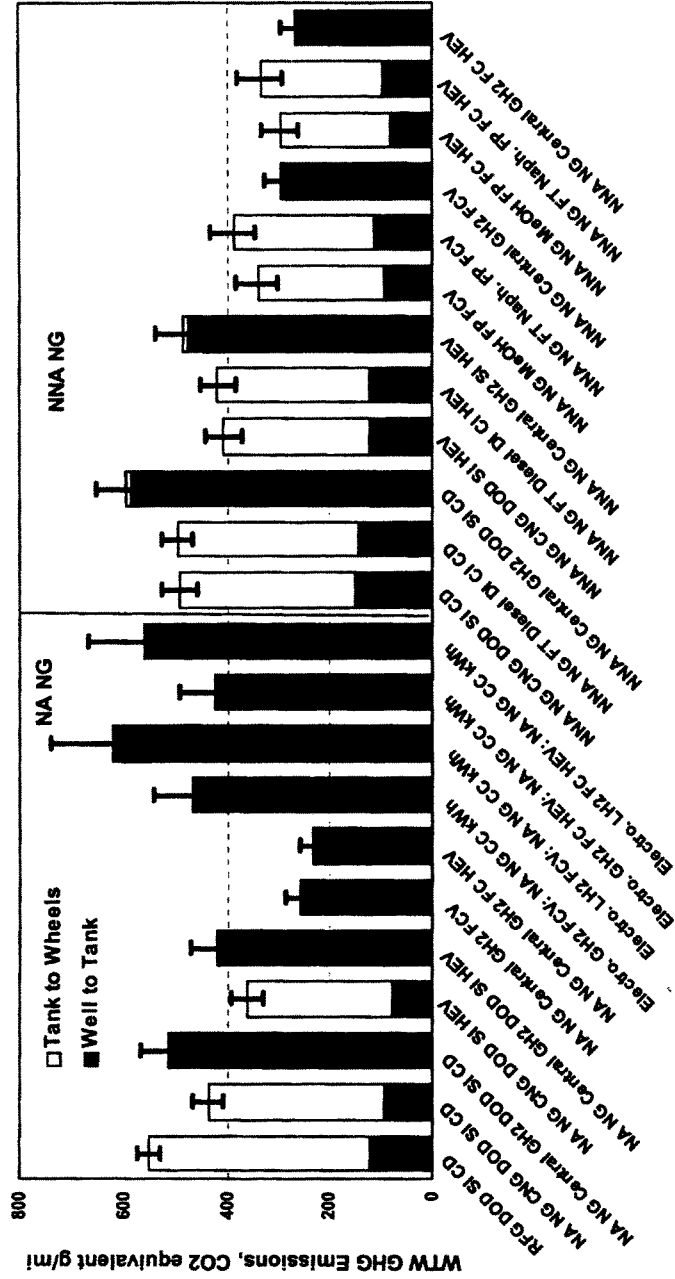


Figure 4-48 Comparison of NG-Based Systems: WTW GHG Emissions (CO<sub>2</sub>-equivalent g/ml)

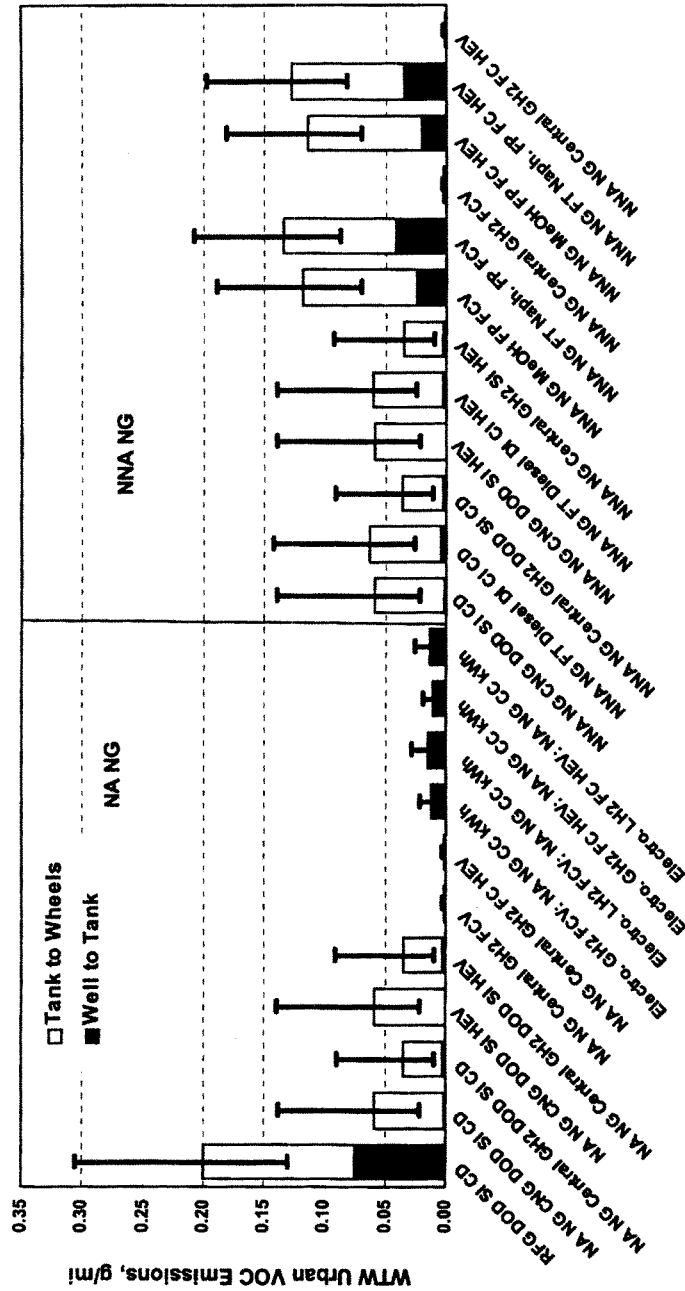


Figure 4-49 Comparison of NG-Based Systems: WTW Urban VOC Emissions (g/mi)



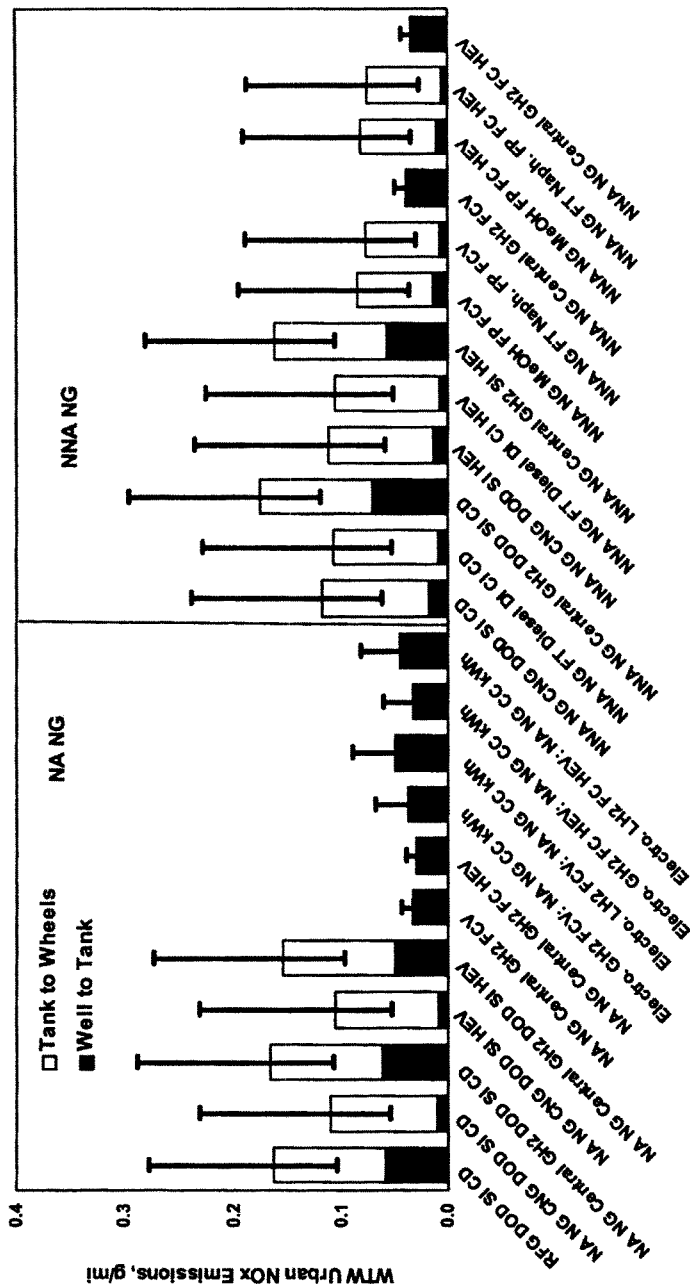


Figure 4-50 Comparison of NG-Based Systems: WTW Urban NO<sub>x</sub> Emissions (g/mi)

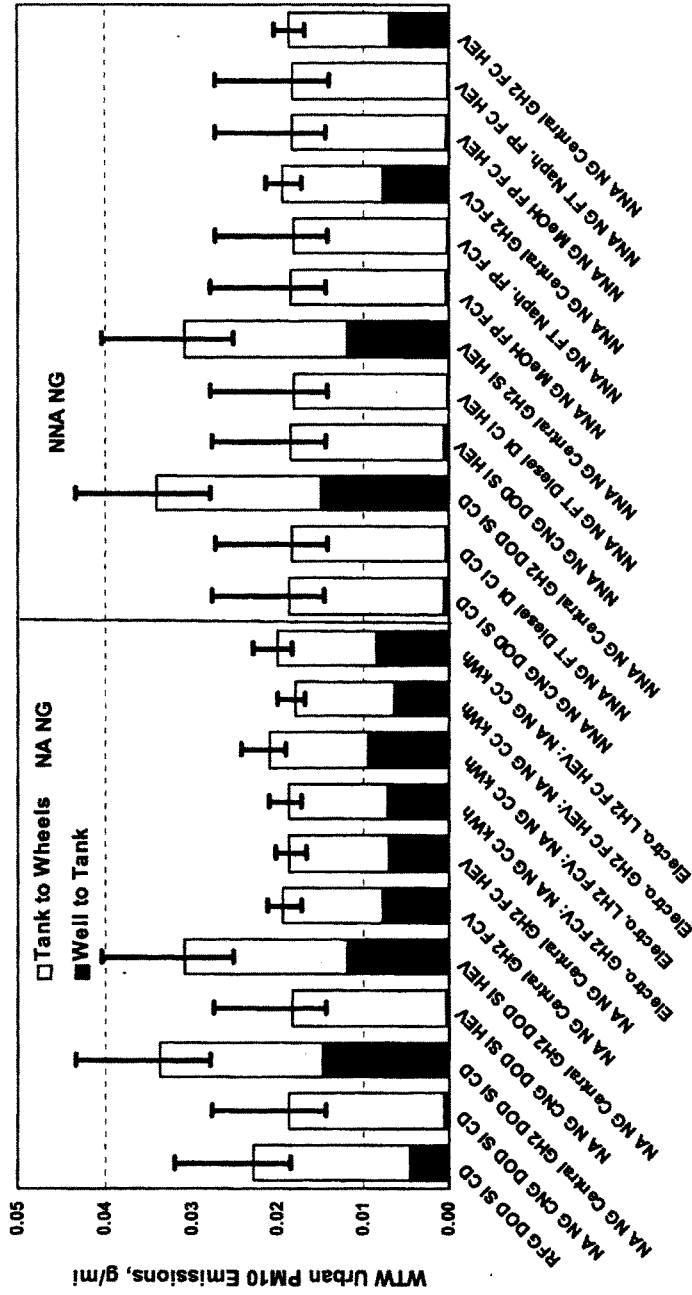


Figure 4-51 Comparison of NG-Based Systems: WTW Urban PM10 Emissions (g/mi)

#### 4.2.9 Comparison of Electrolysis Hydrogen between the U.S. Electricity Generation Mix and the California Electricity Generation Mix

In previous sections, we presented the energy use and emissions results for technologies powered with electrolysis hydrogen produced by using U.S. average electricity, NG CC electricity, and renewable electricity to demonstrate the importance of electricity sources for electrolysis hydrogen production. We realize that California could deploy FCVs first. In the early stage of potential California FCV deployment, hydrogen may be produced from electricity there. Thus, besides U.S. average electric generation, we simulated electrolysis hydrogen production with the California average generation mix. Table 4-5 shows U.S. and California

**Table 4-5 Projected U.S. and California Electricity Generation Mixes in 2016**

Fuel	U.S. Generation Mix (%)	California Generation Mix (%)
Residual Oil	1	0
NG	15	33
Coal	54	21
Nuclear	18	15
Others <sup>a</sup>	12	31

<sup>a</sup> Others here include hydro, geothermal, wind, and solar power. These power sources have zero emissions (emissions associated with plant construction are not included in GREET simulations).

electricity generation mixes for 2016, our target year for analysis in this study. The U.S. generation mix is based on projections by the Energy Information Administration; the California generation mix is based on projections by the California Energy Commission. Note that the California generation mix includes out-of-state power generation for California consumption. The major difference between the U.S. and California mixes is less power from coal, more power from NG, and more power from other sources in California than in the United States.

Figures 4-52 through 4-60 present the results of electrolysis hydrogen-based technologies with the U.S. and California electricity generation mixes. Figure 4-52 shows WTW total energy use for ICE vehicles, ICE HEVs, and FCVs powered with GH<sub>2</sub> and LH<sub>2</sub>, both of which are produced from electricity. In all the cases, hydrogen produced with California average electricity results in lower total energy use than hydrogen produced with U.S. average electricity. The reduction in total energy use from U.S. to California electricity is attributable to the fact that a large share of California electricity is derived from other sources for which GREET uses 100% power plant conversion efficiency (see Figure 4-2 and related discussions there). Overall, while electrolysis-LH<sub>2</sub>-based technology options result in increased total energy use, FCVs (both standalone and hybrid configurations) powered with GH<sub>2</sub> result in total energy use similar to that of baseline gasoline vehicles.

Figure 4-53 compares WTW fossil energy use for U.S. electricity-based and California electricity-based hydrogen technology options. The reductions in fossil energy use from U.S. average electricity to California average electricity for hydrogen production result from the fact that 70% of U.S. electricity is generated from fossil energy sources, while only 54% of California electricity is generated from fossil energy sources.

Figure 4-54 presents WTW GHG emissions for the U.S. and California generation mixes. The reductions in GHG emissions from U.S. electricity to California electricity for hydrogen production are attributable to the large amount of electricity that is generated from hydro, geothermal, wind, and solar power in California. In fact, with the California electricity generation mix, FCVs powered with electrolysis hydrogen could result in moderate GHG emission reductions instead of the GHG emission increases that result from the U.S. electricity generation mix. These results again demonstrate the importance of

considering the electricity sources for electrolysis hydrogen production in determining energy and emission benefits of electrolysis-hydrogen-based FCVs.

Figures 4-55 and 4-56 compare total and urban NO<sub>x</sub> emissions for the two electricity generation mixes. For total NO<sub>x</sub> emissions (Figure 4-55), the California generation mix results in small increases in WTW NO<sub>x</sub> emissions relative to NO<sub>x</sub> emissions for the baseline gasoline vehicles, while the U.S. generation mix results in large increases. For urban NO<sub>x</sub> emissions (Figure 4-56), FCVs powered with hydrogen derived from California electricity actually result in emission reductions. However, hydrogen-ICE-based vehicle technologies still result in increased NO<sub>x</sub> emissions because of both their tailpipe NO<sub>x</sub> emissions and NO<sub>x</sub> emissions associated with electricity generation.

Figures 4-57 and 4-58 show total and urban PM<sub>10</sub> emissions for electrolysis-hydrogen-based technology options. In all cases, PM<sub>10</sub> emissions are increased with electrolysis-based hydrogen technologies. But the increases with the California electricity generation mix are much smaller than with the U.S. generation mix. For urban PM<sub>10</sub> emissions, FCVs powered with electrolysis hydrogen result in emission reductions under both the U.S. and the California generation mixes.

Figures 4-59 and 4-60 compares total and urban SO<sub>x</sub> emissions for the two generation mixes. There are large reductions in total SO<sub>x</sub> emissions from the U.S. electricity generation mix to the California generation mix for hydrogen production because a much smaller share of electricity is generated from coal-fired power plants in California than in the United States as a whole. In any case, SO<sub>x</sub> emissions increase with all electrolysis-hydrogen-based technology options under both generation mixes. The results for urban SO<sub>x</sub> emissions are similar to those for total SO<sub>x</sub> emissions.

In summary, with the California electricity generation mix, the energy use and emissions of electrolysis-hydrogen-based technology options are reduced, relative to those with the U.S. generation mix. In the cases of GHGs and urban NO<sub>x</sub> emissions, the differences between the two generation mixes are large enough to result in overall reductions in these emissions by FCVs powered with electrolysis hydrogen supplied by the California electricity generation mix relative to emissions associated with baseline gasoline vehicles.

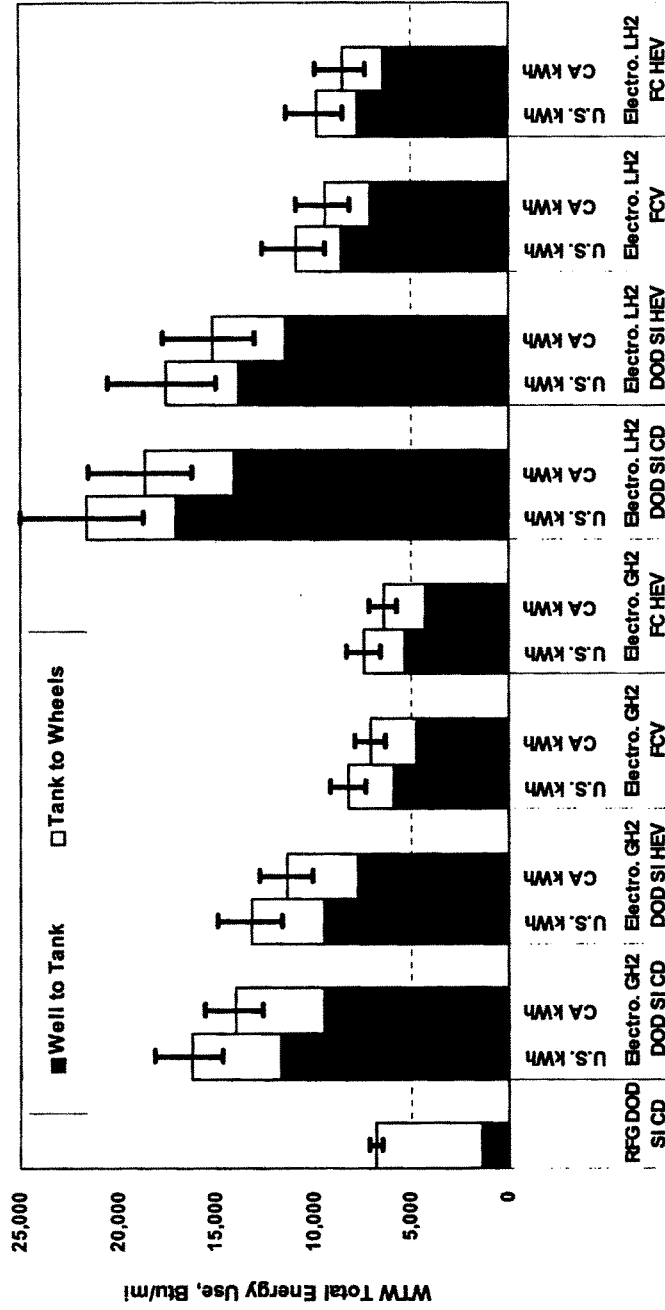


Figure 4-52 Comparison of U.S. and California Electricity Generation Mixes: WTW Total Energy Use (Btu/mi)

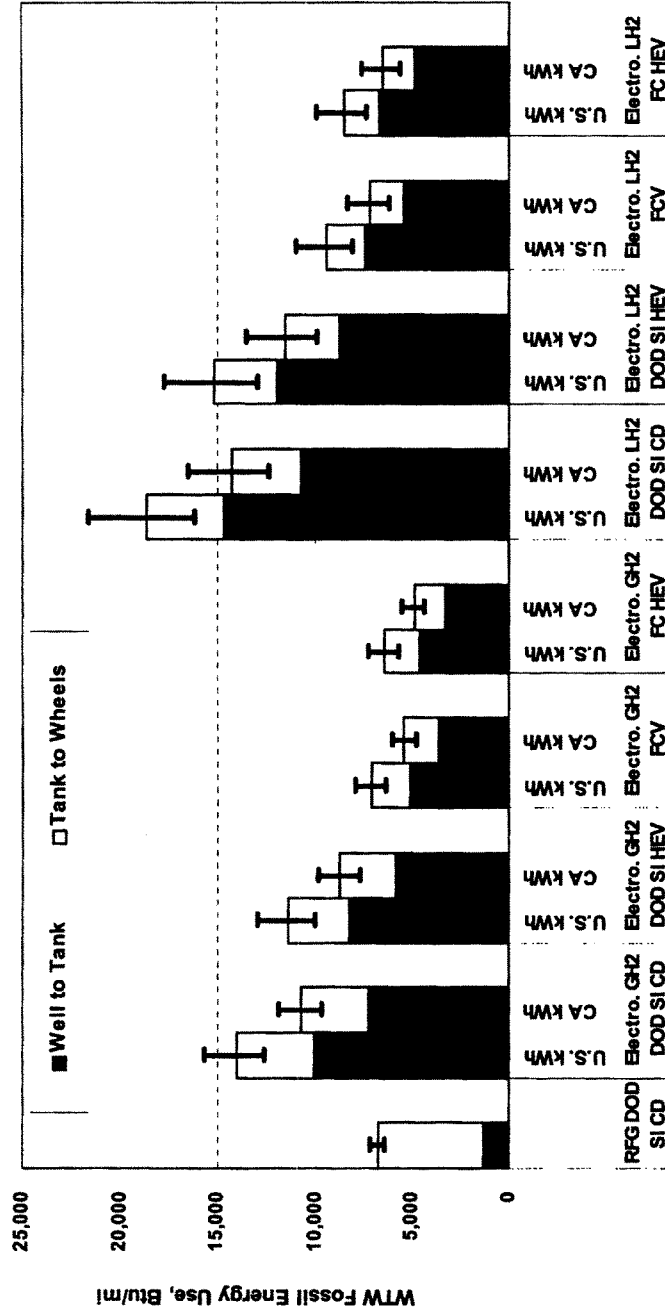


Figure 4-53 Comparison of U.S. and California Electricity Generation Mixes: WTW Fossil Energy Use (Btu/mi)

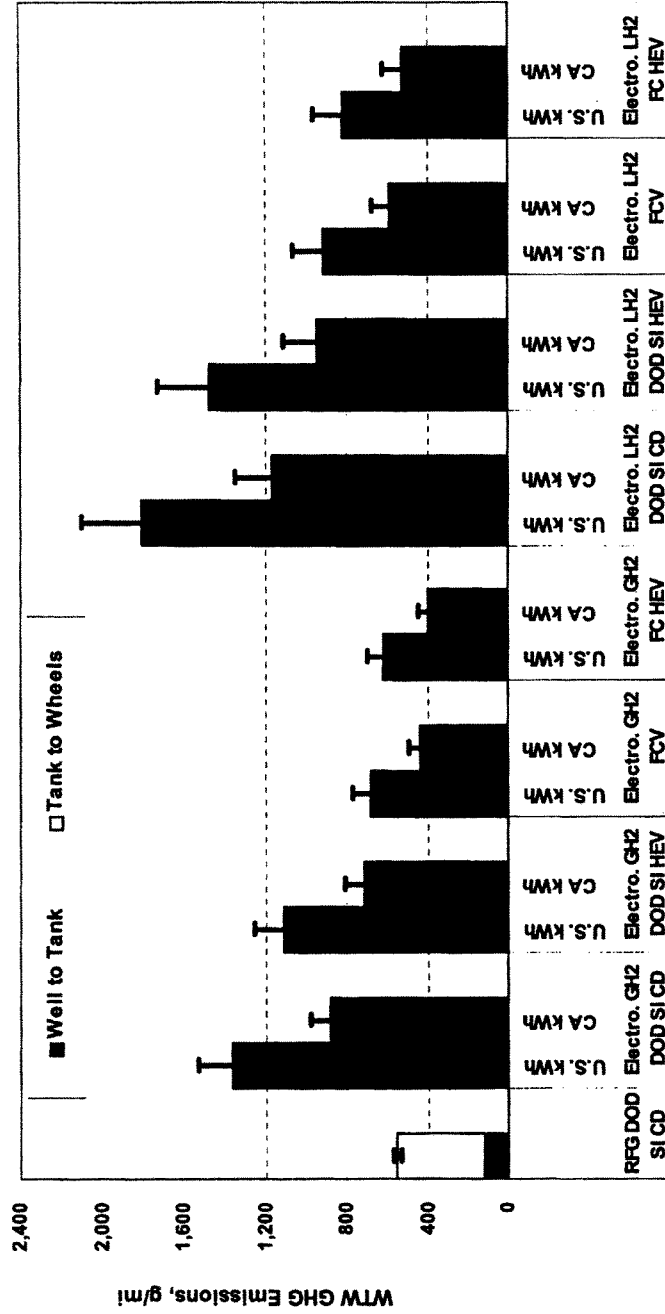


Figure 4-54 Comparison of U.S. and California Electricity Generation Mixes: WTW GHG Emissions (g/ml)

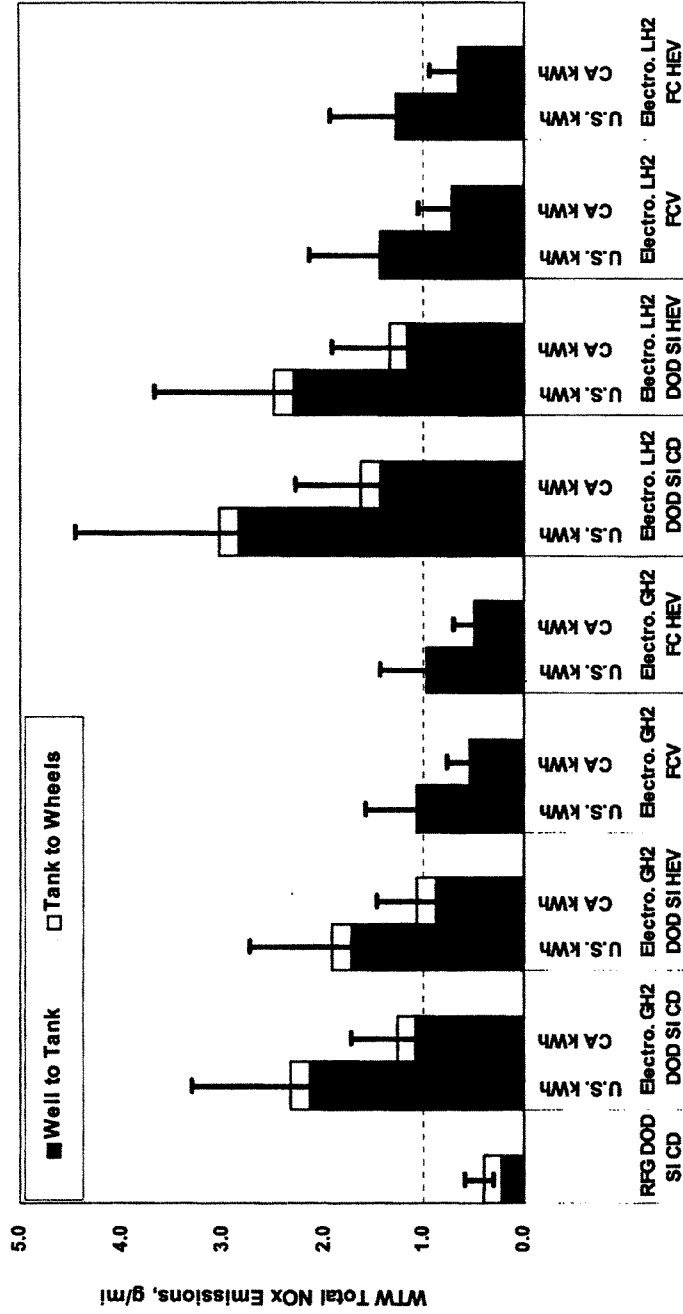


Figure 4-55 Comparison of U.S. and California Electricity Generation Mixes: WTW Total NO<sub>x</sub> Emissions (g/ml)



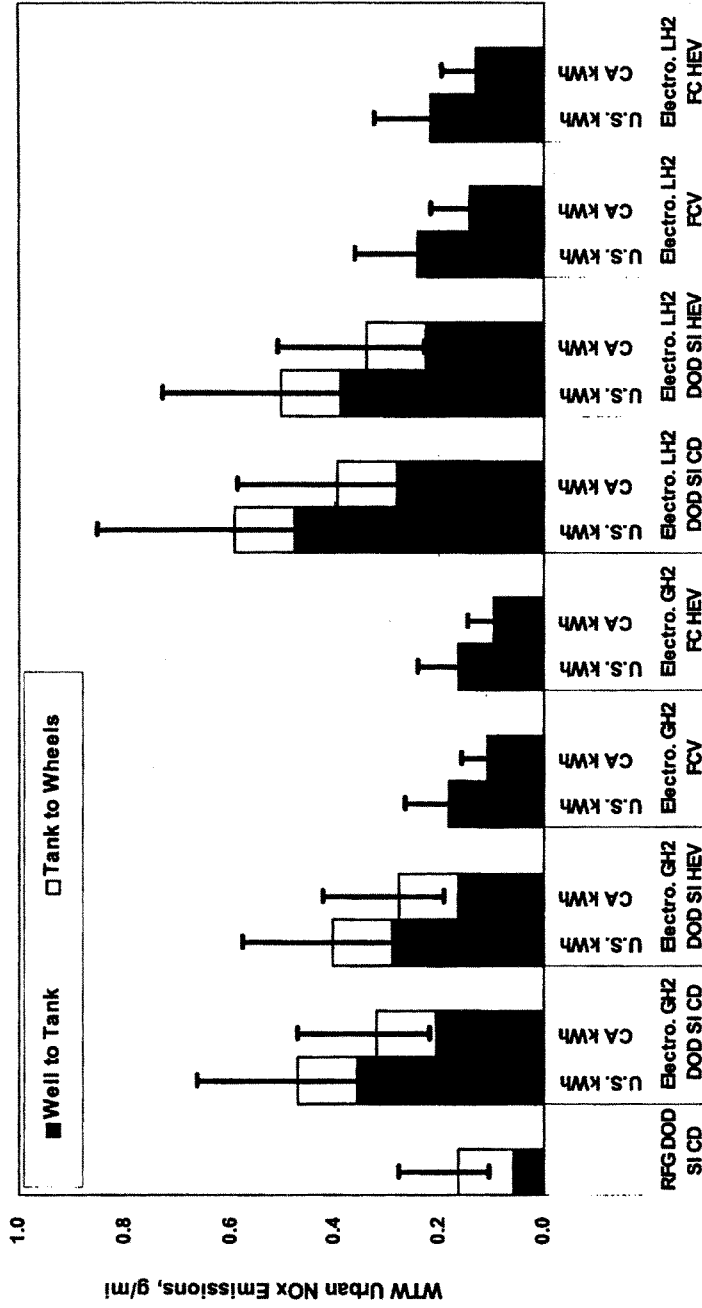


Figure 4-56 Comparison of U.S. and California Electricity Generation Mixes: WTW Urban NO<sub>x</sub> Emissions (g/mi)

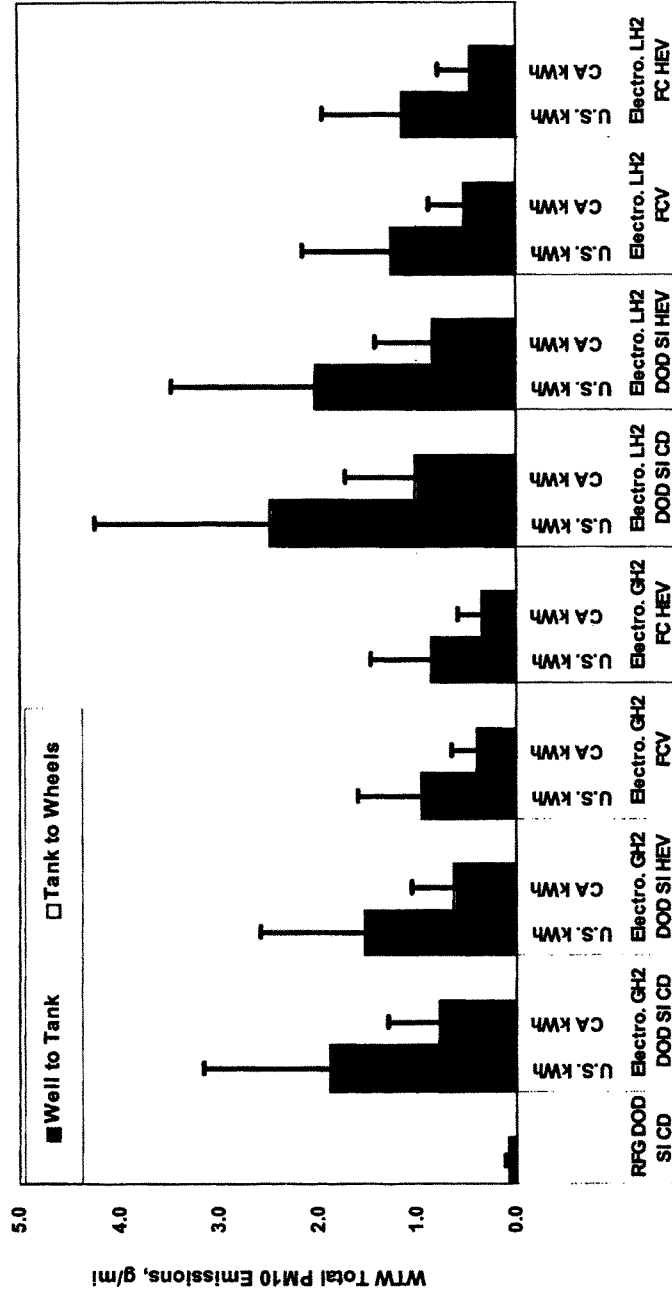


Figure 4-57 Comparison of U.S. and California Electricity Generation Mixes: WTW Total PM<sub>10</sub> Emissions (g/mi)

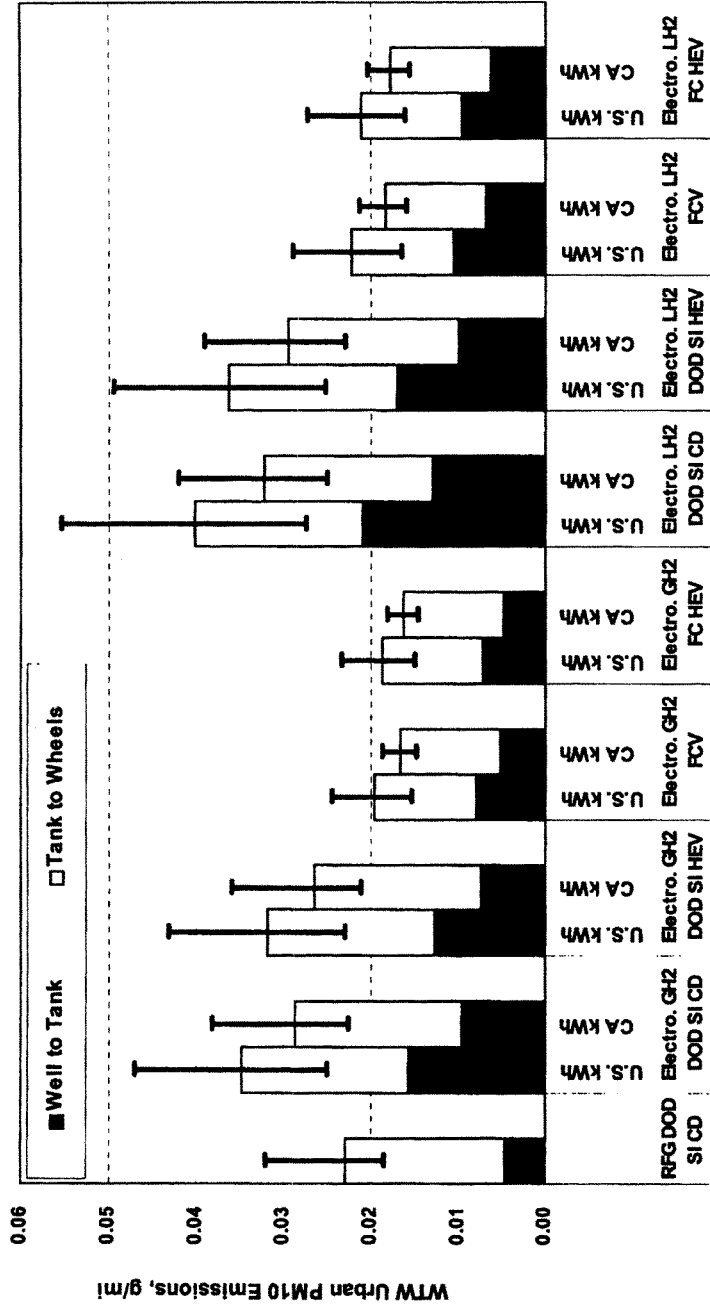


Figure 4-58 Comparison of U.S. and California Electricity Generation Mixes: WTW Urban PM<sub>10</sub> Emissions (g/mi)

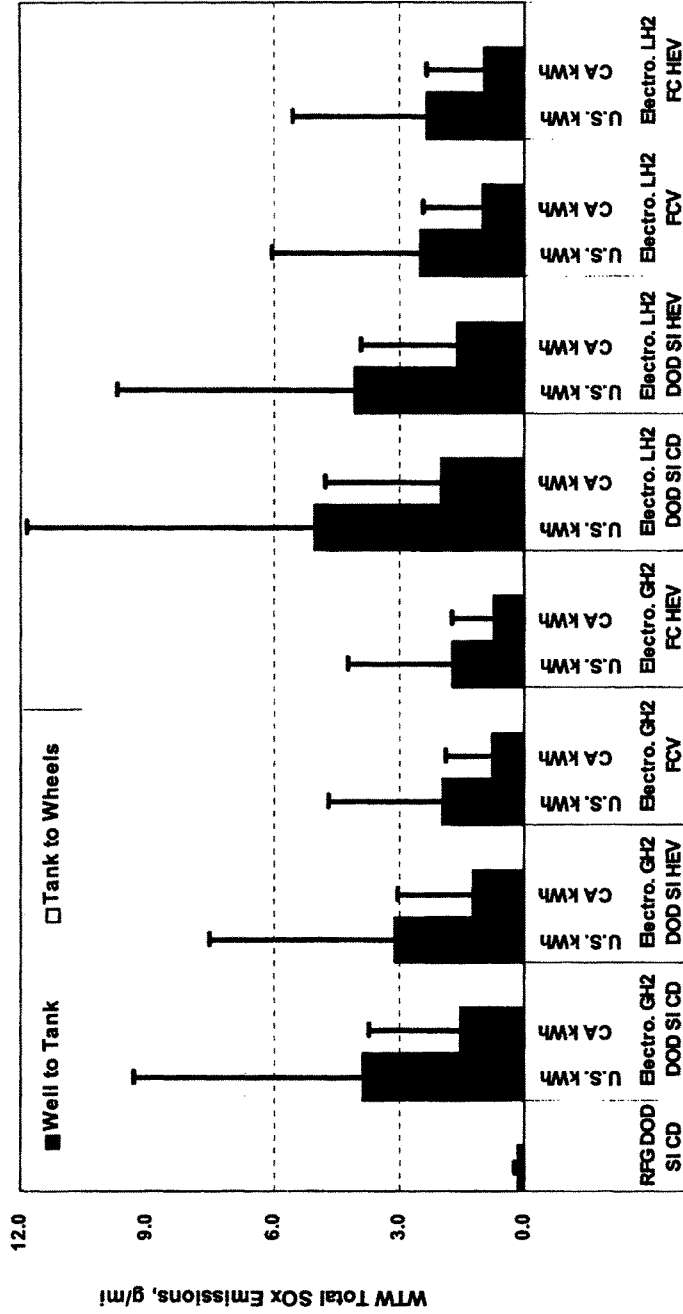


Figure 4-59 Comparison of U.S. and California Electricity Generation Mixes: WTW Total SO<sub>x</sub> Emissions (g/mi)

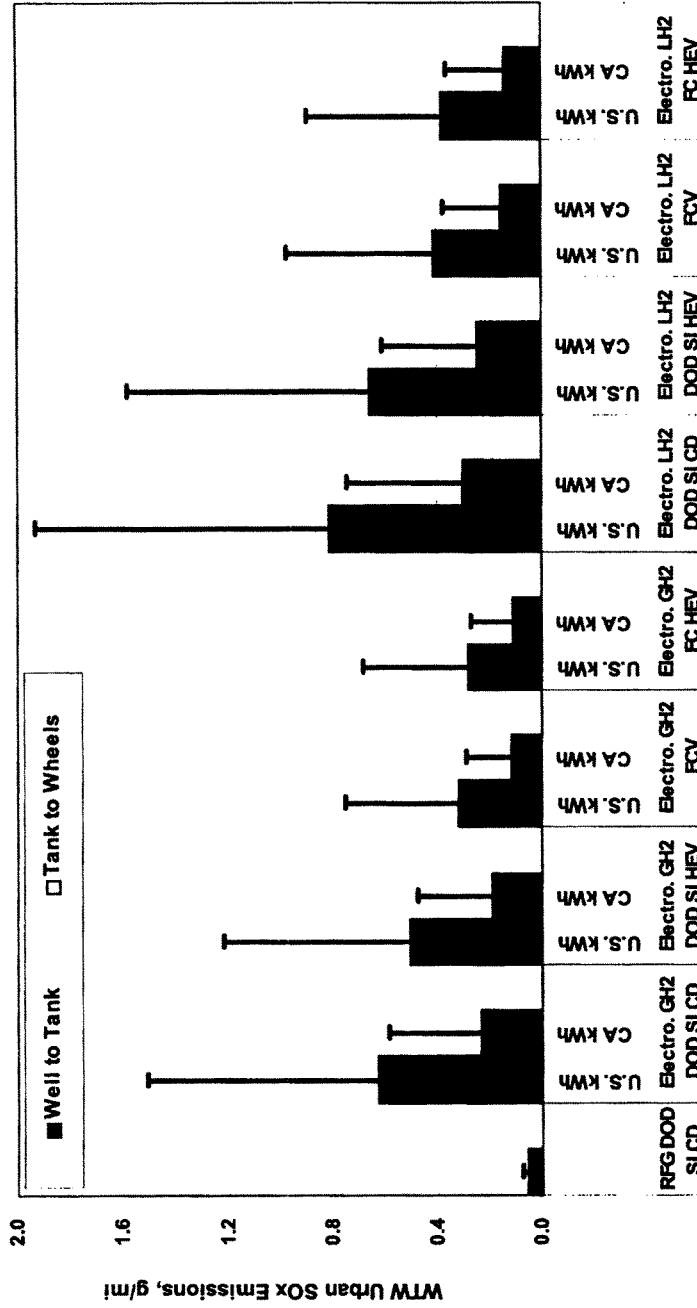


Figure 4-60 Comparison of U.S. and California Electricity Generation Mixes: WTW Urban SO<sub>x</sub> Emissions (g/mi)

#### 4.2.10 Effects of Power Plant Emission Reductions Resulting from the Interstate Air Quality Rule Adopted by EPA

In Section 2, we described potential reductions in NO<sub>x</sub> and SO<sub>x</sub> emissions from electric power plants that may result from the Interstate Air Quality Rule adopted by EPA. The adopted IAQR is intended to reduce NO<sub>x</sub> and SO<sub>x</sub> emissions in electric power plants in 29 Eastern U.S. states. We estimated that the IAQR rule could result in a 43% reduction in power plant NO<sub>x</sub> emissions and a 41% reduction in power plant SO<sub>x</sub> emissions nationwide. To test the effect of the IAQR rule, we used the GREET model to simulate the WTW NO<sub>x</sub> and SO<sub>x</sub> emissions of electrolysis-hydrogen-based technology options under the IAQR rule.

Figures 4-61 and 4-62 shows WTW total and urban NO<sub>x</sub> emissions of electrolysis-hydrogen-based vehicle technologies with baseline power plant emissions projected by EPA and IAQR power plant emissions. Total NO<sub>x</sub> emissions for electrolysis hydrogen technology options are reduced roughly by 40% from baseline power plant emissions to IAQR power plant emissions. However, the reductions are not large enough to cause overall reductions in NO<sub>x</sub> emissions for these vehicle technologies, relative to NO<sub>x</sub> emissions from baseline gasoline vehicles. On the other hand, the reductions in urban NO<sub>x</sub> emissions from the baseline case to the IAQR case are large enough so that FCVs powered with electrolysis hydrogen result in urban NO<sub>x</sub> emission reductions under the IAQR case.

Figures 4-63 and 4-64 present total and urban SO<sub>x</sub> emissions under the two cases. Although the IAQR case results in large reductions in WTW SO<sub>x</sub> emissions for electrolysis-hydrogen-based technologies, the reductions are not large enough to cause overall reductions in SO<sub>x</sub> emissions by these vehicle technologies relative to baseline gasoline vehicles.

The simulations of the IAQR rule with GREET show that as power plant emissions are further controlled, FCVs powered even with U.S. average electricity mix will result in reductions in NO<sub>x</sub> emissions.

#### 4.2.11 Comparison of Bin 5 vs. Bin 2 Hydrogen ICE Vehicle Technologies

Our analysis assumed that hydrogen ICE technologies (both standalone and hybrid configuration) would meet EPA's Tier 2 Bin 5 NO<sub>x</sub> emission standards. Some recent efforts have demonstrated that hydrogen ICE technologies could meet Tier 2 Bin 2 NO<sub>x</sub> emission standards. We simulated WTW NO<sub>x</sub> emissions of Bin 2 hydrogen ICE technologies with GREET.

Figures 4-65 and 4-66 present the WTW total and urban NO<sub>x</sub> emissions associated with hydrogen ICE technologies meeting either Bin 5 or Bin 2 NO<sub>x</sub> emission standards. Total NO<sub>x</sub> emissions are reduced somewhat from Bin 5 to Bin 2 for an individual technology option. But the reductions are generally small because as vehicles meet Tier 2 standards, tailpipe NO<sub>x</sub> emissions account for only a small share of the WTW NO<sub>x</sub> emissions of hydrogen ICE technologies.

The reductions from Bin 5 to Bin 2 for urban NO<sub>x</sub> emissions are larger than for total NO<sub>x</sub> emissions. But overall, the reductions are not large enough to change the overall ranking of hydrogen ICE technologies relative to baseline gasoline vehicles. Both figures show that hydrogen ICE technologies powered with NG-based hydrogen generate an amount of NO<sub>x</sub> emissions similar to the amount generated by baseline gasoline vehicles. However, hydrogen ICE technologies powered by electrolysis hydrogen with the U.S. average electricity generation mix produce NO<sub>x</sub> emissions larger than those of baseline gasoline vehicles.

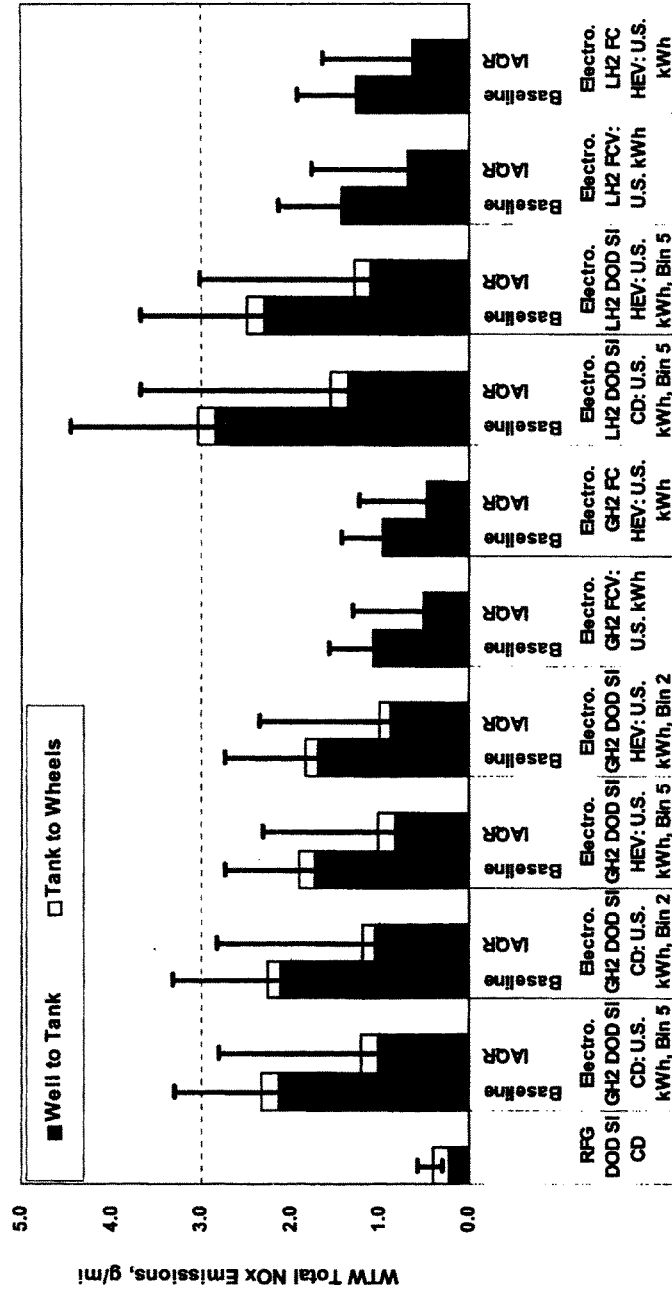


Figure 4-61 Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Total NO<sub>x</sub> Emissions (g/mi)

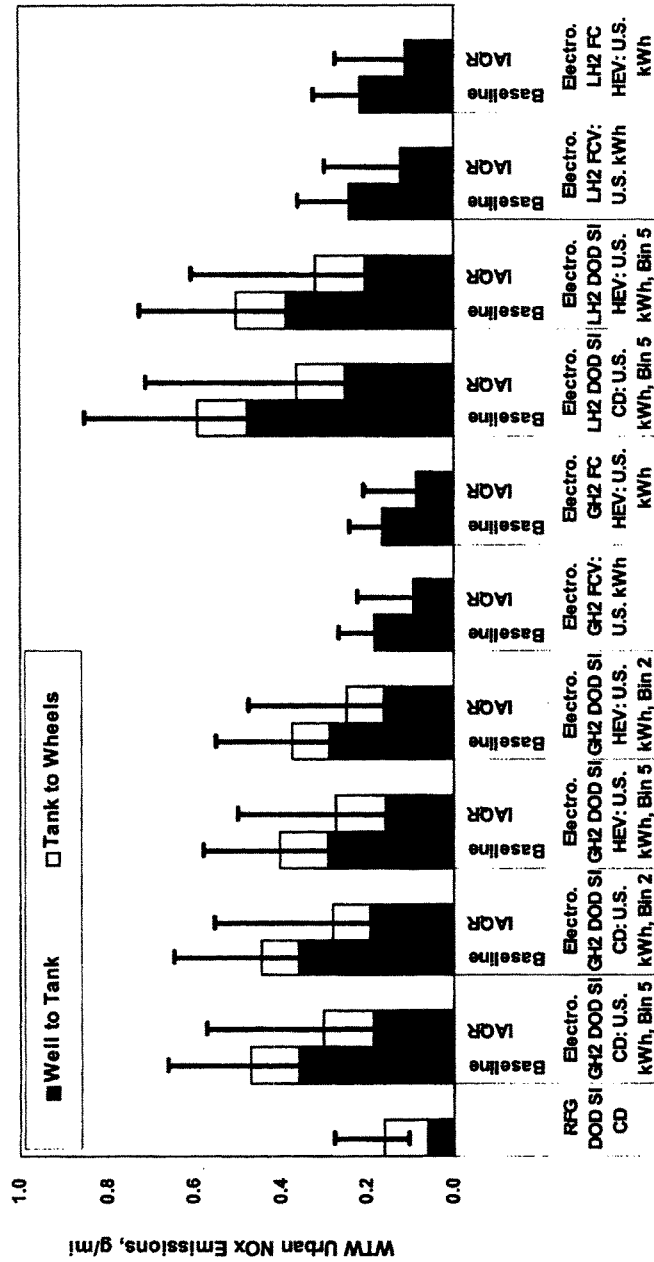


Figure 4-62 Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Urban NO<sub>x</sub> Emissions (g/mi)



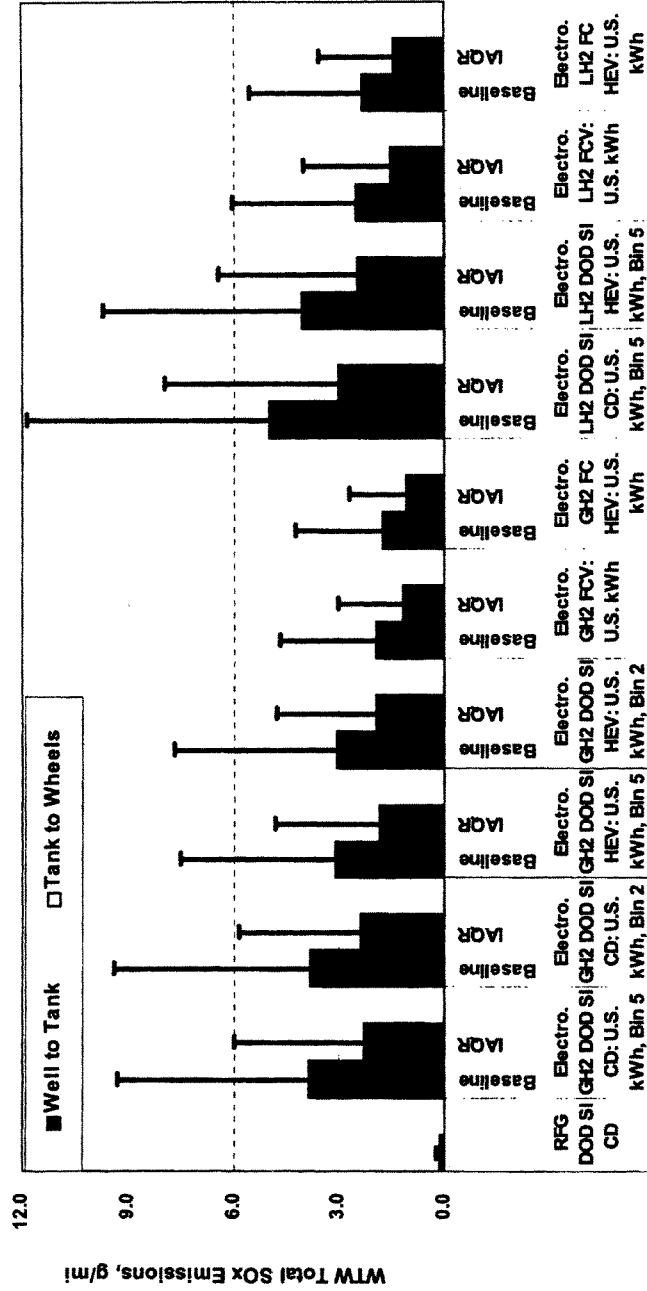


Figure 4-63 Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Total SO<sub>x</sub> Emissions (g/mi)

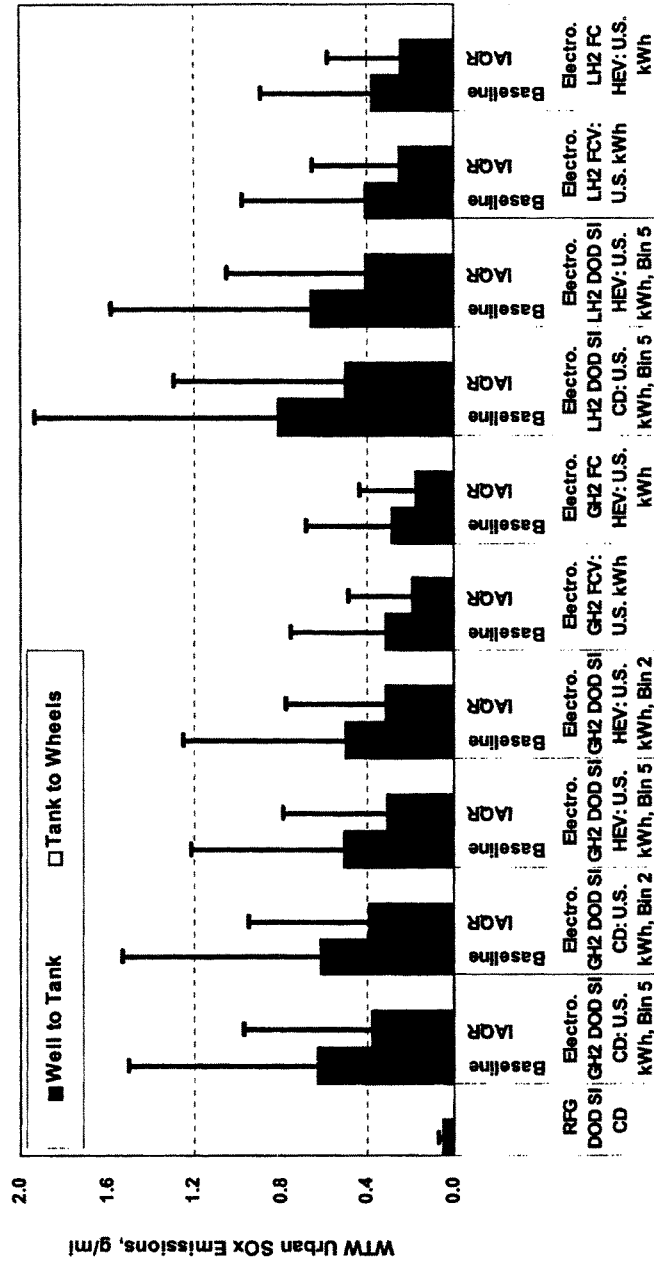


Figure 4-64 Effects of the Adopted Interstate Air Quality Rule for Power Plant Emission Control: WTW Urban SO<sub>x</sub> Emissions (g/mi)

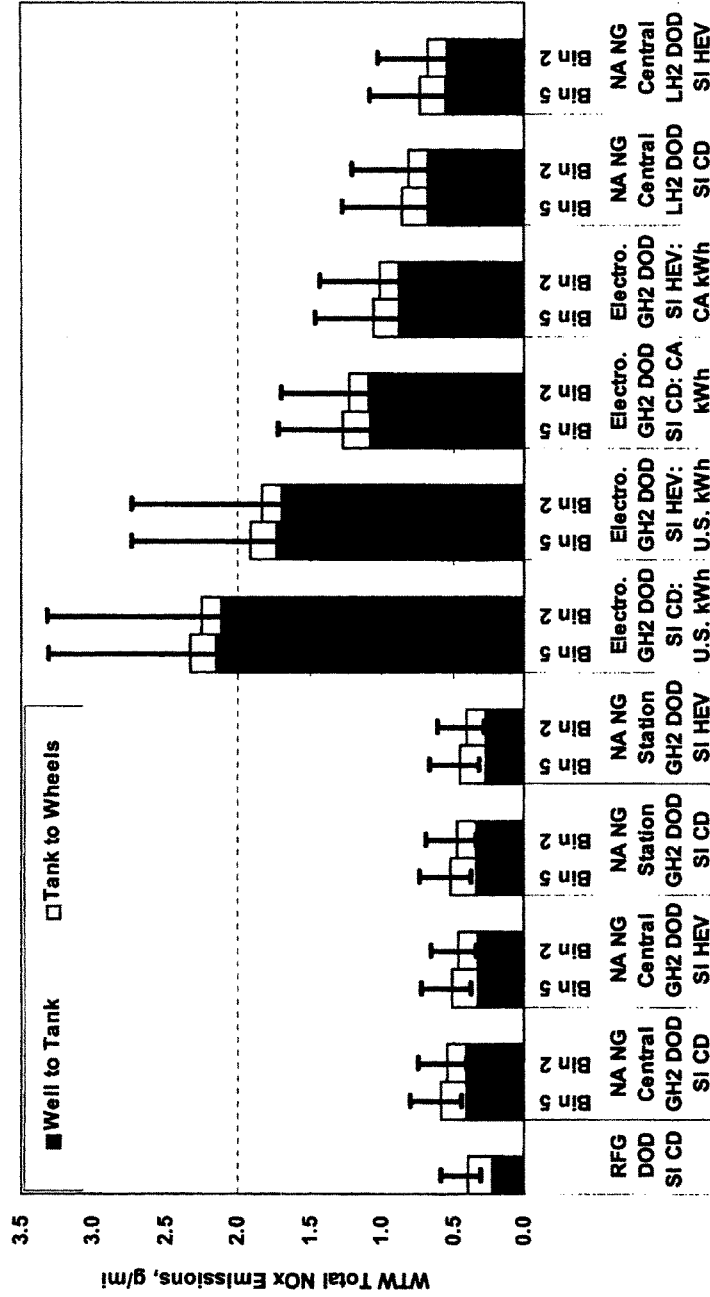


Figure 4-65 Comparison of Hydrogen ICE Technologies Meeting Bin 5 and Bin 2 NO<sub>x</sub> Standards: WTW Total NO<sub>x</sub> Emissions (g/mi)

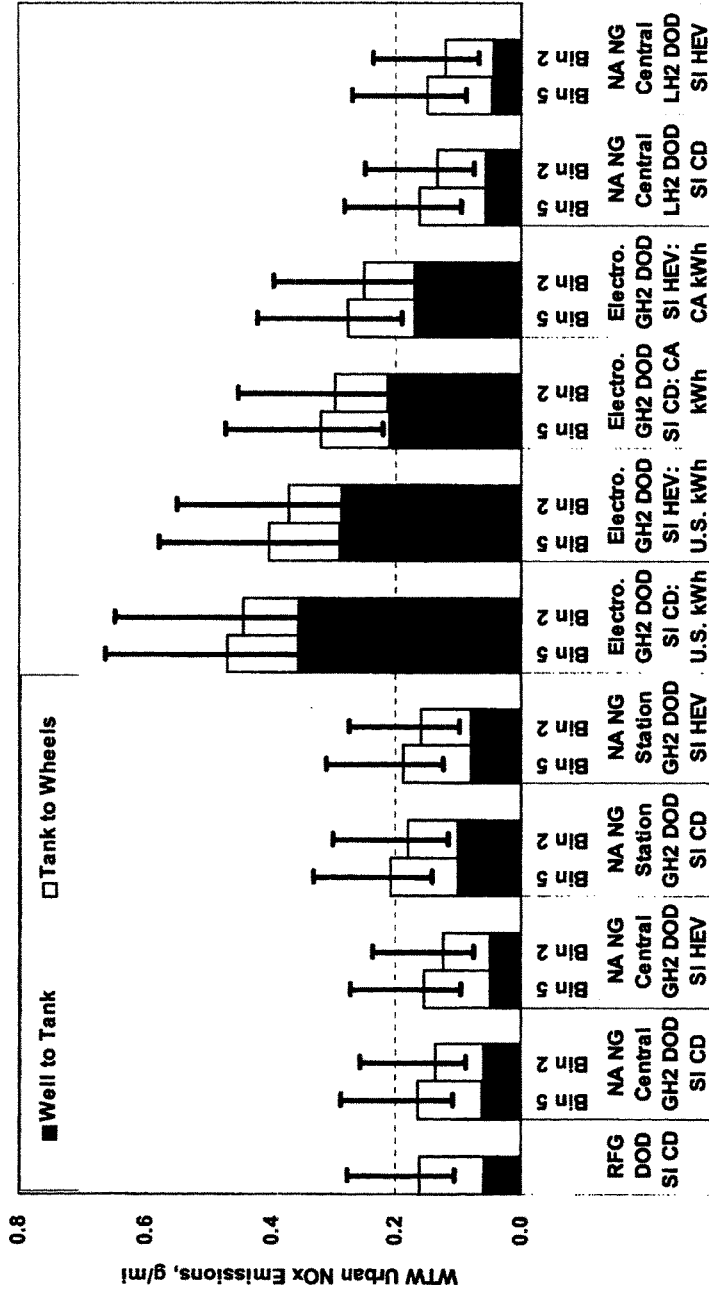


Figure 4-66 Comparison of Hydrogen ICE Technologies Meeting Bin 5 and Bin 2 NO<sub>x</sub> Standards: WTW Urban NO<sub>x</sub> Emissions (g/mi)

## 5. CONCLUSIONS

When advanced vehicle technologies are introduced together with new transportation fuels, their energy and emission effects must be evaluated on a WTW basis in order to provide an accurate assessment of their true energy and environmental benefits. The WTW results of this study show that significant shares of energy and emission burdens could occur in the WTT stages for some of the vehicle/fuel systems evaluated. This is true even for criteria pollutant emissions, as vehicle tailpipe emissions continue to decline to meet the U.S. Tier 2 vehicle emission standards.

The GREET WTW simulations completed for this study show that, in general, fuel production and vehicle operation are two key WTW stages in determining WTW energy use and emissions results. The fuel production stage usually has the largest energy-efficiency losses of all WTT stages. This is true for production of gasoline, diesel, hydrogen, FT diesel, ethanol, methanol, and electricity. Special attention must be given to the energy efficiency of each fuel production stage.

For the vehicle operation stage, the most significant factor in determining WTW results is the fuel consumption of the vehicle technologies. Fuel efficiency (or fuel energy consumption per distance driven) directly determines GHG emissions per mile during operation of vehicles fueled with carbon-containing fuels. Furthermore, fuel consumption directly affects the allocation of WTT emissions (in g/mmBtu) to WTW emission (in g/mi). Thus, simulation to determine fuel consumption values for vehicle technologies is a key activity for WTW analyses.

Vehicle simulations for this study were conducted for a full-size pickup truck. As discussed in Section 3, our simulations reveal that DI SI engine technology could achieve a gain of about 15% in fuel economy, and DI CI engine technology could achieve a gain of more than 20%. HEV technologies used with gasoline and diesel ICEs achieve 25–45% gains in fuel economy. On the other hand, FCVs employing onboard reforming offer fuel economy gains of 51–65%, and fuel cell HEVs employing onboard reforming offer gains of 70–90%. Direct-hydrogen FCVs achieve fuel economy gains of 140%, and direct-hydrogen fuel cell HEVs achieve gains of more than 160%. These fuel economy gains contribute directly to the reductions in WTW energy use and emissions by these advanced vehicle technologies. In the cases in which hydrogen is used to power vehicles, the large gains in fuel economy by fuel cell technologies far offset energy-efficiency losses during hydrogen production (except for electrolysis hydrogen production, for which fuel economy gains are not enough to offset the large energy losses of electricity generation and hydrogen production together).

Vehicle fuel economy has a smaller impact on WTW emissions of criteria pollutants (except for SO<sub>x</sub> emissions) for ICE-based technologies, because vehicular criteria pollutant emissions are regulated on a per-mile basis, and after-combustion emission control technologies are designed to reduce per-mile emissions, resulting in a disconnection between the amount of fuel consumed and the amount of per-mile criteria pollutant emissions generated. For vehicle technologies that do not have tailpipe emissions (such as direct-hydrogen FCVs and battery-powered EVs), fuel consumption directly affects WTW criteria pollutant emissions.

Our WTW results show that advanced vehicle technologies offer great potential for reducing petroleum use, GHG emissions, and criteria pollutant emissions. Reductions in petroleum use are attributable to vehicle fuel consumption reductions by advanced vehicle technologies and the switch from petroleum to non-petroleum energy feedstocks in the case of hydrogen, electricity, CNG, FTD, methanol, and ethanol. Use of non-petroleum feedstocks for transportation fuel production essentially eliminates petroleum use.

Use of E85 in ethanol flexible-fuel vehicles reduces petroleum use by about 70% (because E85 contains about 26% gasoline, on an energy basis). On the other hand, HEVs operating on gasoline or diesel reduce petroleum use by 20–30%, exclusively because of vehicle fuel consumption reductions.

The WTW GHG emissions generated by advanced vehicle technologies are determined by the WTT energy efficiencies of fuel pathways, the vehicle fuel consumption, the carbon content of energy feedstocks for fuel production, and the renewability of those feedstocks. The use of renewable feedstocks (such as renewable electricity and cellulosic ethanol) helps eliminate (or almost eliminate) GHG emissions. Even vehicle technologies with high fuel consumption can still eliminate GHG emissions, because the fuel and its feedstock do not have carbon burdens. For example, use of renewable hydrogen in hydrogen ICE and fuel cell technologies achieves 100% reductions in GHG emissions. On the other hand, use of cellulosic E85 in ICE technologies achieves reductions of about 70% (the benefits are reduced because E85 contains 26% gasoline by energy content).

The GHG reduction results for advanced vehicles powered by carbon-containing fuels or fuels derived from carbon-containing feedstocks depend on WTT efficiencies and vehicle fuel consumption. For example, FCVs powered by NG-derived hydrogen achieve GHG reductions of about 50% because of the low fuel consumption of direct-hydrogen FCVs. If NG-derived hydrogen is used in hydrogen ICE technologies that are less efficient than hydrogen fuel cell technologies, there may be no GHG reduction benefits. In hydrogen plants, all carbon in NG ends up as CO<sub>2</sub>. If CO<sub>2</sub> is captured and stored, this production pathway essentially becomes a zero-carbon pathway. Any vehicle technologies using hydrogen produced this way will eliminate GHG emissions. In our analysis, we did not assume carbon capture and storage for central hydrogen plants with NG.

Some of the vehicle technologies and fuels evaluated in this study offer moderate reductions in GHG emissions: corn-based E85 in flexible-fuel vehicles, HEVs powered by hydrocarbon fuels, and diesel-fueled vehicles. In general, these vehicle/fuel systems achieve 20–30% reductions in GHG emissions. The reduction achieved by using corn-based E85 is only moderate because (1) significant amounts of GHG emissions are generated during corn farming and in corn ethanol production plants; (2) diesel fuel, LPG, and other fossil fuels are consumed during corn farming; (3) a large amount of nitrogen fertilizer is also used for corn farming, and manufacture of nitrogen fertilizer and its nitrification and denitrification in cornfields produce a large amount of GHG emissions; and (4) usually, NG or coal is used in corn ethanol plants to generate steam. If renewable energy sources, such as corn stover or cellulosic biomass, are used in corn ethanol production plants, use of corn-based E85 could result in larger GHG emission reductions.

Hybrids fueled with CNG achieve larger GHG reductions than their fuel consumption reductions, because NG is 21% less carbon-intensive (defined as carbon content per energy unit of fuel) than gasoline (our baseline fuel). On the other hand, diesel ICEs and hybrids achieve smaller GHG reductions than their fuel consumption reductions, because diesel fuel is 7% more carbon-intensive than gasoline.

GHG results for hydrogen generated by means of electrolysis may be the most dramatic WTW results in this study. Two major efficiency losses occur during electricity generation and hydrogen production via electrolysis. Consequently, this pathway is subject to the largest WTT energy-efficiency losses. Using hydrogen (itself a non-carbon fuel) produced this way could result in dramatic increases in WTW GHG emissions. For example, if hydrogen is produced with U.S. average electricity (more than 50% of which is generated from coal-fired power plants), its use, even in efficient FCVs, can still result in increased GHG emissions; its use in less-efficient hydrogen ICEs results in far greater increases in GHG emissions. On the other hand, if a clean electricity generation mix, such as the California generation mix, is used, the use of electrolysis hydrogen in FCVs could result in moderate reductions in GHG emissions. Furthermore, if

renewable electricity, such as wind power, is used for hydrogen production, the use of hydrogen in any vehicle technology will result in elimination of GHG emissions. This case demonstrates the importance of careful examination of potential hydrogen production pathways so that the intended GHG emission reduction benefits by hydrogen-powered vehicle technologies can truly be achieved.

Ours is the first comprehensive study to address WTW emissions of criteria pollutants. The results reveal that advanced vehicle technologies help reduce WTW criteria pollutant emissions. We assumed in our study that ICE vehicle technologies will, at minimum, meet EPA's Tier 2 Bin 5 emission standards. Improvements in fuel consumption by advanced vehicle technologies will help reduce per-mile WTT criteria pollutant emissions. For example, gasoline or diesel HEVs with low fuel consumption will reduce WTW criteria pollutant emissions by 10–20%, exclusively because of their reduced WTT emissions.

Probably the most revealing results are the differences in WTW criteria pollutant emissions between ICE and fuel cell technologies. Although tailpipe criteria pollutant emissions generated by ICE technologies will be reduced significantly in the future, they will continue to be subject to on-road emission deterioration (although to a much smaller extent than past ICE technologies, thanks to OBD systems). On the other hand, FCVs, especially direct-hydrogen FCVs, generate no tailpipe emissions. Except for electrolysis hydrogen generated with U.S. average electricity, hydrogen FCVs reduce WTW emissions of criteria pollutants. For example, NG-derived hydrogen FCVs reduce WTW NO<sub>x</sub> emissions by about 50%. FCVs also reduce the uncertainty range of criteria pollutant emissions, because they do not experience on-road deterioration of criteria pollutant emissions.

Vehicle technologies fueled with hydrogen generated via electrolysis usually result in increased criteria pollutant emissions. Power plant emissions, together with the low efficiency of electrolysis hydrogen production, cause the increases. In order to mitigate the increases, power plant emissions will have to be reduced drastically or clean power sources will have to be used for hydrogen production.

Ethanol-based technology options also result in increased total emissions for criteria pollutants, because large amounts of emissions occur during biomass farming and ethanol production. Our study estimates total and urban emissions of criteria pollutants separately. Although total emissions are increased by using ethanol, a significant amount of the total emissions occurs outside of urban areas (on farms and in ethanol plants that will be located near biomass feedstock farms). While total emission results show the importance of controlling ethanol plant emissions, urban emission estimates show that the negative effects of biofuels (such as ethanol) on criteria pollutant emissions are not as severe as total emission results imply.

Examination of GHG emissions and criteria pollutant emissions reveals tradeoffs for some vehicle/fuel technologies. For example, while diesel vehicle technologies offer the potential to reduce fuel use and, consequently, to reduce GHG emissions, they may face challenges in reducing NO<sub>x</sub> and PM<sub>10</sub> emissions. Our assumption that diesel vehicles will meet Tier 2 Bin 5 standards by no means understates the technical challenges that automakers face in achieving this goal. On the other hand, FCVs can achieve emission reductions for both GHGs and criteria pollutants — thus offering a long-term solution to emissions of both GHGs and criteria pollutants from the transportation sector.

The results of our WTW analysis of criteria pollutant emissions show that, as tailpipe emissions from motor vehicles continue to decline, WTT activities could represent an increased share of WTW emissions, especially for hydrogen, electricity, ethanol, and FT diesel. Thus, in order to achieve reductions in criteria pollutant emissions by advanced vehicle technologies, close attention should be paid to emissions associated with WTT, as well as TTW, activities.

Our study analyzed advanced vehicle technologies together with new transportation fuels, because vehicle technologies and fuels together have become increasingly important in seeking solutions to transportation energy and environmental problems. High-quality fuels are necessary to allow the introduction of advanced vehicle technologies. For example, low-sulfur gasoline and diesel are needed for gasoline lean-burn and clean-diesel engines. The energy and environmental benefits of FCVs can be guaranteed only by using hydrogen from clean feedstocks and efficient production pathways. In a way, the recent popularization of WTW analyses reflects the new reality — that vehicles and fuels must be considered together in addressing transportation energy and environmental issues.

Our study separates energy use into total energy, fossil energy, and petroleum energy. Separate results for each of the three energy types shed light on the true energy benefits of transportation fuels. For example, some other studies that developed estimates for total energy use showed large increases in energy use for biofuels. But those studies failed to differentiate among the different types of energy sources. A fuel that offers a significant reduction in petroleum use may be able to help reduce U.S. oil imports. In Section 4, we demonstrated that total energy calculations can sometimes be arbitrary. For these reasons, we maintain that the type of energy sources, as well as the amount of energy use, should be considered in evaluating the energy benefits of vehicle/fuel systems.



## 6. STUDY LIMITATIONS

The intent of this study was to evaluate the energy and emission effects of the vehicle/fuel systems included in the study, with the premise that they could be introduced around 2010. Like many other WTW studies, ours did not address the economics and market constraints of the vehicle/fuel systems considered. Costs and commercial readiness may eventually determine which vehicle/fuel systems are able to penetrate the vehicle market. The results of this study provide guidance to help ensure that R&D efforts are focused on the vehicle/fuel systems that will provide true energy and emission benefits. Because WTW studies generally do not address economics, consumer acceptance, and many other factors, they cannot determine the marketability of vehicle/fuel systems.

As discussed in Section 5, the fuel consumption of vehicle/fuel systems is one of the most important factors in determining WTW energy use and emissions results, especially GHG emissions. In our analysis, we based vehicle fuel consumption simulations on the full-size Silverado pickup truck. Compared with a typical passenger car, the pickup truck has higher fuel consumption and higher tailpipe emissions, resulting in higher WTW energy use and emissions per mile. Most other WTW studies were based on passenger cars. Absolute results per mile driven between this study and other completed studies cannot be compared. However, the relative changes that can be derived from per-mile results in this study and other studies can be compared to understand the differences in potential energy and emission benefits for different vehicle and fuel technologies.

Several major WTW studies have been completed in the past several years. For example, MIT conducted a WTW study in 2000 and updated it in 2003 (Weiss et al. 2000; 2003). The MIT study was based on a mid-size passenger car. The GM-sponsored European WTW study (L-B-Systemtechnik GmbH et al. 2002) was based on an Opel Zafira minivan with an engine displacement of 1.8 L. A WTW study sponsored by the Joint Research Centre of the European Commission, Concawe, and the European Council for Automotive R&D (2003) was based on a typical European compact car similar to the Volkswagen Golf. Comparison of absolute results from these studies and our study are less meaningful, mainly because different vehicle sizes were used in these studies. However, comparison of the relative change results among these studies should improve our understanding of the range of energy and emission benefits associated with advanced vehicle technologies and new transportation fuels, although such comparisons are beyond the scope of this study.

The fuel consumption improvements of HEVs directly affect their WTW energy and emission benefits. The extent of HEV fuel consumption improvements depends largely on the degree of hybridization and on designed tradeoffs between fuel consumption and vehicle performance. The HEV design simulated in this study was intended to fully meet the performance goals of the conventional Silverado truck. Furthermore, engine downsizing was not assumed here for the best-estimate HEV design. This design decision resulted in smaller fuel consumption reductions by HEVs in this study than could be achieved with downsized engines. Downsized engines were considered in the best-case HEV scenario.

Although we included many hydrogen production pathways in this study, we have certainly not covered every potential hydrogen production pathway. For instance, we included neither hydrogen production via gasification from coal and cellulosic biomass nor hydrogen production via high-temperature, gas-cooled nuclear reactors. R&D efforts are currently in progress for these hydrogen production pathways. For some of the hydrogen production pathways considered in this study (such as hydrogen from NG in central plants), we did not assume carbon capture and storage. If we had done so, those pathways might have been shown to result in huge GHG emission reductions.

Although we addressed uncertainties in our study with Monte Carlo simulations, the results of our simulations depend heavily on probability functions that we established for key WTW input parameters. Data limitations reduced the reliability of the distribution functions we built for some of the key input parameters, such as criteria pollutant emissions of key WTT and TTW stages. Nonetheless, systematic simulations of uncertainties in WTW studies could become the norm for future WTW studies.

## 7. ACKNOWLEDGMENTS

We appreciate the substantial contributions to this study by the individuals listed below. Without their efforts, this study would not have been possible.

	Name	Affiliation
WTT	Clint Burklin	Eastern Research Group, Morrisville, NC
	Amy Alexander	Eastern Research Group, Morrisville, NC
	Dennis Kahlbaum	University of Michigan
	Harry Sigworth	ChevronTexaco, Richmond, CA
	Steve Welstand	ChevronTexaco, San Ramon, CA
	Michael Milliet	ChevronTexaco, Houston, TX
	Lyman Young	ChevronTexaco, Richmond, CA
	Jean Cadu	Shell, London
	Chuck Lieder	Shell Global Solutions, Houston, TX
TTW	Moshe Miller	Advanced Development Corporation, Israel
	Rodney Rask	GM Research and Development Center, Warren, MI
	Tony Zarger	GM Fiat-GM Powertrain, Pontiac, MI
	David Masten	GM Fuel Cell Activity, Honeoye Falls, NY
	Volker Formanski	GM Fuel Cell Activity, Mainz-Kastel, Germany
WTW	Danilo Santini	Argonne National Laboratory, Argonne, IL
	Ye Wu	Argonne National Laboratory, Argonne, IL
	Greg Ruselowski	General Motors Fuel Cell Activity, Warren, MI

## 8. REFERENCES

- American Methanol Institute, 2003, *World Methanol Plants (through December 2001)*, website of American Methanol Institute ([www.methanol.org](http://www.methanol.org)), accessed on May 20.
- Burklin, C., and A. Alexander, 2002, *Technical Documentation for the Emission Factors and Trends Developed for the Transportation Fuels Industries*, July 24.
- California Air Resources Board, 1999, LEV II and CAP 2000 Amendments, Final Regulation Order, Oct. 28.
- California Air Resources Board, 2004, EMFAC2002 Emission Inventories Modeling Software and Documents, accessed from [http://www.arb.ca.gov/msei/on-road/latest\\_version.htm](http://www.arb.ca.gov/msei/on-road/latest_version.htm).
- CARB: See California Air Resources Board.
- Eichlseder, H., et al., 2003, *The Potential of Hydrogen Internal Combustion Engines in a Future Mobility Scenario*, SAE 2003-01-2267, June.
- Energy Information Administration, 2003, *Uranium Industry Annual 2002*, DOE/EIA-0478(2002), Washington, D.C., May.
- EPA: See U.S. Environmental Protection Agency.
- Fellini R., P. Papalambros, and T. Weber, 2000, *Application of Product Platform Design Process to Automotive Powertrains*, Proceedings of the 8th AIAA / NASA / USAF / ISSMO Symposium on Multidisciplinary Analysis and Optimization, Paper No. AIAA-2000-4849.
- Fellini, R., 1998, *Derivative Free and Global Search Optimization Algorithms in an Object-Oriented Design Framework*, Master of Science Thesis, Department of Mechanical Engineering, University of Michigan, Ann Arbor, Mich.
- Fellini, R., et al., 1999, *Optimal Design of Automotive Hybrid Powertrain Systems*, Proceedings of the EcoDesign '99: 1st International Symposium on Environmentally Conscious Design and Inverse Manufacturing, Tokyo, Japan, Feb.
- General Motors Corporation, Argonne National Laboratory, BP, ExxonMobil, and Shell, 2001, *Well-to-Wheel Energy Use and Greenhouse Gas Emissions of Advanced Fuel/Vehicle Systems — North American Analysis*, Volumes 1–3, <http://www.transportation.anl.gov/ttrdc/publications/gapc.html>, June.
- Intergovernmental Panel on Climate Change, 2001, *Technical Summary of Working Group I Report*.
- IPCC: See Intergovernmental Panel on Climate Change.
- The Joint Research Centre of European Commission, Concawe, and the European Council for Automotive R&D, 2003, *Well-to-Wheels Analysis of Future Automotive Fuels and Powertrains in the European Context*, Brussels, Belgium, Dec.

L-B-Systemtechnik GmbH, General Motors Corporation, BP, ExxonMobil, Shell, and TotalFinaElf, 2002, *GM Well-to-Wheel Analysis of Energy Use and Greenhouse Gas Emissions of Advanced Fuel/Vehicle Systems — A European Study*, <http://www.lbst.de/gm-wtw>, Ottobrunn, Germany, Sept. 27.

Lee H., M.Q. Wang, and J. Molburg, 2003, *Process Energy Allocation of Petroleum Refining Processes*, paper presented at the Spring Meeting of the American Institute of Chemical Engineers, New Orleans, La., March 31.

Michaels, H., 1998, *Emissions of Nitrous Oxide from Highway Mobile Sources*, EPA420-R-98-009, Aug.

Natkin, R., et al., 2002, *Ford Hydrogen Internal Combustion Engine Design and Vehicle Development Program*, Global Powertrain Conference.

Natkin, R., et al., 2003, *Hydrogen IC Engine Boosting Performance and NO<sub>x</sub> Study*, SAE 2003-01-0631.

Sasena, M., 1998, *Optimization of Computer Simulations via Smoothing Splines and Kriging Metamodels*, Master of Science Thesis, Department of Mechanical Engineering, University of Michigan, Ann Arbor, Mich.

Schwieger, R., et al., 2002, "First Annual Top Plants Survey," *The Power Magazine*, Aug.

U.S. Environmental Protection Agency, 1995, *Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, AP-42 Fifth Edition*, Research Triangle Park, N.C., Jan. (with updated sections from <http://www.epa.gov/ttn/chief/ap42/>).

U.S. Environmental Protection Agency, 1999, *Draft 1999 National Emissions Inventory Database*, <http://www.epa.gov/ttn/chief/net/index.html>.

U.S. Environmental Protection Agency, 2000, *Control of Air Pollution from New Motor Vehicles: Tier 2 Motor Vehicle Emissions Standards and Gasoline Sulfur Control Requirements; Final Rule*, 40 CFR Parts 80, 85, and 86, Feb. 10.

U.S. Environmental Protection Agency, 2003, MOBILE6.2 Emission Factor Modeling Software and Documents, Office of Transportation and Air Quality, accessed from <http://www.epa.gov/otaq/m6.htm>.

U.S. Environmental Protection Agency, 2004a, Rule to Reduce Interstate Transport of Fine Particulate Matter and Ozone (Interstate Air Quality Rule); Proposed Rule, *Federal Register*, Vol. 69, No. 20, pp. 4566-4650, Jan. 30.

U.S. Environmental Protection Agency, 2004b, EGRID – Emissions and Generation Resource Integrated Database, accessed from <http://www.epa.gov/cleanenergy/egrid/index.htm>, last updated by EPA on March 25.

Wang, M.Q., 1996, *Development and Use of the GREET Model to Estimate Fuel-Cycle Energy Use and Emissions of Various Transportation Technologies and Fuels*, ANL/ESD-31, Center for Transportation Research, Argonne National Laboratory, June.

Wang, M.Q., 1999, *GREET 1.5 — Transportation Fuel-Cycle Model, Volume 1: Methodology, Development, Use, and Results, Volume 1*, ANL/ESD-39, Center for Transportation Research, Argonne National Laboratory, Aug.

Wang, M.Q., 1999, *GREET 1.5 — Transportation Fuel-Cycle Model, Volume 2: Appendices of Data and Results, Volume 2*, ANL/ESD-39, Center for Transportation Research, Argonne National Laboratory, Aug.

Wang, M.Q., 2001, *Development and Use of GREET 1.6 Fuel-Cycle Model for Transportation Fuels and Vehicle Technologies*, ANL/ESD/TM-163, Center for Transportation Research, Argonne National Laboratory, June.

Wang, M.Q., and H.S. Huang, 1999, *A Full Fuel-Cycle Analysis of Energy and Emissions Impacts of Transportation Fuels Produced from Natural Gas*, ANL/ESD-40, Center for Transportation Research, Argonne National Laboratory, Dec.

Weber, T., 2003, *Vehicle System Modeling in the Automotive Industry*, University of Wisconsin, ARO/ERC Engine Modeling Symposium, Madison, Wis., June.

Weiss, M.A., et al., 2000, *On the Road in 2020 — A Life Cycle Analysis of New Automobile Technologies*, Energy Laboratory, Massachusetts Institute of Technology, Oct.

Weiss, M.A., et al., 2003, *Comparative Assessment of Fuel Cell Cars*, Energy Laboratory, Massachusetts Institute of Technology, Feb.

Wurster, R., et al., 2004, *Well-to-Wheel Analysis of Energy Use and Greenhouse Gas Emissions of Advanced Fuel/Vehicle Systems — Results from the European Study*, The 15th World Hydrogen Energy Conference, Yokohama, Japan, June.

**APPENDIX A**  
**ANALYSIS OF THE NATIONAL EMISSION INVENTORY DATABASE**

**TABLE A-1 Activity Data Sources Used for Process Emission Factor Calculations**

Process	Activity Data Source
Bituminous coal and lignite surface mining and processing	NEI
Bituminous coal underground mining and processing	NEI
Nitrogen fertilizer production	NEI
Crude petroleum pipelines	NEI
Refined petroleum product pipelines	NEI
Petroleum bulk terminals	NEI
Gasoline and diesel service stations	NEI
Natural gas liquids production	<i>Oil and Gas Journal</i> , Vol. 97, Issue 24, June 14, 1999
Ethanol Production	BBI, International for 2001
Methanol production from natural gas	ChemExpo's Chemical Profile of Methanol for 2000
Phosphate fertilizer production	ChemExpo's Chemical Profile of Ammonium Phosphates for 1999. Applied capacity utilization factor of 78% to all facility capacities. Utilization factor from Federal Reserve Statistical Release for Industrial Production and Capacity Utilization
Petroleum Refineries	<i>Oil and Gas Journal</i> , Vol. 97, Issue 51, Dec. 20, 1999; applied utilization factor of 93%. Utilization factor from Federal Reserve Statistical Release (same as above)

TABLE A-2 Summary of Combustion Emission Factors (g/mmBtu of fuel burned)

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90
VOC	Coal industrial boilers	6	0.809	0.203	0.682	1.220	0.686	0.739	1.173
	Coke industrial boilers	1	0.476		0.476	0.476	0.476	0.476	0.476
	Diesel industrial boilers	6	1.205	0.667	0.632	2.293	0.636	0.940	2.238
	Diesel reciprocating engines	13	157.576	156.391	18.038	649.351	40.713	156.235	264.550
	Gasoline reciprocating engines	1	1528.270		1528.270	1528.270	1528.270	1528.270	1528.270
	ICE fugitive emissions	1	989.487		989.487	989.487	989.487	989.487	989.487
	LPG industrial boilers	1	1.679		1.679	1.679	1.679	1.679	1.679
	LPG reciprocating engines	1	3.346		3.346	3.346	3.346	3.346	3.346
	NG industrial boilers	297	1.595	1.942	0.006	21.619	0.588	1.154	2.542
	NG large gas turbines	23	3.439	5.521	0.011	21.008	0.052	1.019	11.757
	NG reciprocating engines	186	55.101	61.110	0.014	435.931	3.778	37.681	138.528
	NG small industrial boilers	138	3.434	13.696	0.217	158.730	0.801	2.217	2.495
	Residual oil industrial boilers	23	2.023	2.596	0.268	12.121	0.705	0.940	5.254
	Solid waste industrial boilers	3	0.096	0.029	0.064	0.119	0.064	0.106	0.119
Waste oil industrial boilers	3	2.508	0.068	2.458	2.586	2.458	2.479	2.586	
CO	Coal industrial boilers	6	276.250	117.753	35.889	324.351	64.728	324.325	324.349
	Coke industrial boilers	1	25.463		25.463	25.463	25.463	25.463	25.463
	Diesel industrial boilers	21	16.686	3.123	12.987	24.438	12.987	16.051	21.254
	Diesel reciprocating engines	18	346.043	191.964	54.113	649.351	84.416	324.675	649.351
	Gasoline reciprocating engines	1	31167.500		31167.500	31167.500	31167.500	31167.500	31167.500
	ICE fugitive emissions	1	1772.830		1772.830	1772.830	1772.830	1772.830	1772.830
	LPG industrial boilers	2	17.227	2.992	15.111	19.342	15.111	17.227	19.342
	LPG reciprocating engines	3	1275.160	939.978	198.778	1934.240	198.778	1692.460	1934.240
	NG industrial boilers	346	16.459	11.572	0.092	57.720	7.141	14.868	36.298

TABLE A-2 Cont.

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90	
CO (Cont.)	NG large gas turbines	26	47.899	51.254	0.295	194.933	3.027	31.191	121.595	
	NG reciprocating engines	211	386.314	385.661	2.562	2687.970	67.473	259.740	894.799	
	NG small industrial boilers	149	23.731	16.453	0.038	129.890	8.636	17.316	36.396	
	Residual oil industrial boilers	24	16.064	4.087	12.121	30.166	13.978	14.711	22.988	
	Solid waste industrial boilers	3	1.787	0.018	1.772	1.808	1.772	1.783	1.808	
	Waste oil industrial boilers	3	15.202	0.032	15.165	15.222	15.165	15.218	15.222	
	NO <sub>x</sub>	Coal industrial boilers	6	246.110	68.047	107.209	273.896	123.877	273.889	273.896
		Coke industrial boilers	2	125.602	154.660	16.241	234.962	16.241	125.602	234.962
		Diesel industrial boilers	24	109.898	51.279	46.165	225.986	64.935	87.663	177.082
		Diesel reciprocating engines	18	1438.630	548.278	129.870	2164.500	459.957	1525.050	1952.930
Gasoline reciprocating engines		1	782.661		782.661	782.661	782.661	782.661	782.661	
ICE fugitive emissions		1	1443.000		1443.000	1443.000	1443.000	1443.000	1443.000	
LPG commercial boiler		3	50.953	11.143	38.685	60.445	38.685	53.729	60.445	
LPG industrial boilers		4	104.286	38.364	77.369	161.186	77.369	89.294	161.186	
LPG reciprocating engines		3	1769.680	526.713	1174.600	2176.020	1174.600	1958.410	2176.020	
NG industrial boilers		356	60.546	39.870	0.110	407.648	23.092	60.529	86.580	
SO <sub>2</sub>	NG large gas turbines	26	138.627	154.770	1.879	707.410	15.105	87.310	325.113	
	NG reciprocating engines	212	1060.090	868.388	6.040	3636.360	57.102	1036.680	2237.720	
	NG small industrial boilers	153	41.820	18.378	1.723	173.160	16.589	43.290	60.606	
	Residual oil industrial boilers	27	187.221	66.525	89.776	372.960	110.312	166.667	297.861	
	Solid waste industrial boilers	3	7.079	0.057	7.018	7.130	7.018	7.088	7.130	
	Waste oil industrial boilers	3	19.756	0.053	19.697	19.798	19.697	19.773	19.798	
	Coal industrial boilers	6	194.677	18.539	187.086	232.520	187.087	187.112	227.981	
	Coke industrial boilers	2	571.001	582.047	159.431	982.570	159.431	571.001	982.570	
	Diesel industrial boilers	28	330.953	379.131	17.418	980.392	27.206	103.896	940.384	
	Diesel reciprocating engines	10	140.000	73.798	18.038	259.740	49.603	146.104	250.120	



TABLE A-2 Cont.

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90	
SO <sub>2</sub> (Cont.)	LPG reciprocating engines	1	1.673		1.673	1.673	1.673	1.673	1.673	
	NG industrial boilers	287	6.108	17.387	0.212	270.134	0.713	1.480	16.971	
	NG large gas turbines	16	3.535	6.583	0.248	16.832	0.251	0.315	16.818	
	NG reciprocating engines	64	0.930	2.459	0.201	15.256	0.241	0.322	1.263	
	NG small industrial boilers	78	6.829	27.602	0.049	219.104	0.140	0.504	14.028	
	Residual oil industrial boilers	27	790.373	637.972	6.985	3214.270	225.729	775.758	1211.920	
	Coke industrial boilers	2	4.333	5.955	0.123	8.544	0.123	4.333	8.544	
PM <sub>10</sub> filterables only	Diesel industrial boilers	6	3.026	0.689	2.239	3.820	2.241	3.117	3.798	
	Diesel reciprocating engines	8	115.721	60.988	12.987	168.350	23.006	146.104	166.546	
	LPG reciprocating engines	1	3.346		3.346	3.346	3.346	3.346	3.346	
	NG industrial boilers	154	3.452	1.369	0.026	6.993	1.265	4.097	4.381	
	NG large gas turbines	11	2.107	2.264	0.089	5.962	0.090	1.015	5.954	
	NG reciprocating engines	78	6.652	5.814	0.201	19.166	0.813	4.334	18.670	
	NG small industrial boilers	57	12.386	35.127	0.433	154.113	0.826	3.171	6.237	
	Residual oil industrial boilers	6	55.130	47.312	1.347	140.654	3.743	52.107	132.515	
	Solid waste industrial boilers	3	0.144	0.043	0.096	0.178	0.096	0.159	0.178	
	PM <sub>10</sub> filterables + condensable	Coal industrial boilers	1	2.472		2.472	2.472	2.472	2.472	2.472
		Diesel industrial boilers	12	70.200	54.230	4.697	200.535	19.949	51.041	153.060
		Diesel reciprocating engines	3	112.782	41.437	64.835	136.705	64.935	136.705	136.705
		Gasoline reciprocating engines	1	46.311		46.311	46.311	46.311	46.311	46.311
LPG industrial boilers		1	1.679		1.679	1.679	1.679	1.679	1.679	
NG industrial boilers		129	3.206	3.264	0.008	35.212	1.320	2.609	5.010	
NG large gas turbines		1	2.903		2.903	2.903	2.903	2.903	2.903	
NG reciprocating engines		6	5.514	1.725	3.275	8.492	3.444	5.127	8.252	
NG small industrial boilers		51	2.801	1.206	0.352	5.772	0.616	3.200	3.566	
Residual oil industrial boilers		6	44.396	17.701	24.383	66.745	24.589	46.248	65.701	

**TABLE A-3 Summary of Process Emission Factors (g/mmBtu of fuel throughput for all groups except fertilizers, which are in tons/1,000 tons throughput )**

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90	
VOC	Crude petroleum pipelines	1	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	
	Diesel service stations	6	0.0011	0.0025	0.0000	0.0062	0.0000	0.0001	0.0056	
	Ethanol production	6	3.5104	1.5269	1.9667	5.9684	1.9959	3.1822	5.8219	
	Gasoline service stations	22	0.0050	0.0024	0.0010	0.0065	0.0010	0.0064	0.0065	
	Methanol production (from natural gas)	1	0.3719		0.3719	0.3719	0.3719	0.3719	0.3719	
	Natural gas liquids production	10	0.0051	0.0049	0.0002	0.0132	0.0004	0.0026	0.0121	
	Petroleum bulk terminals - crude	1	0.0002		0.0002	0.0002	0.0002	0.0002	0.0002	
	Petroleum bulk terminals - diesel	6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
	Petroleum bulk terminals - gasoline	23	0.0009	0.0013	0.0000	0.0040	0.0000	0.0003	0.0032	
	Petroleum refineries	25	0.0334	0.0324	0.0039	0.1430	0.0062	0.0291	0.0718	
	Phosphate fertilizer production	6	0.0273	0.0271	0.0013	0.0707	0.0016	0.0215	0.0681	
	Refined petroleum pipelines	1	0.0850		0.0850	0.0850	0.0850	0.0850	0.0850	
	CO	Methanol production (from natural gas)	1	0.2264		0.2264	0.2264	0.2264	0.2264	0.2264
		Natural gas liquids production	8	0.0007	0.0012	0.0000	0.0036	0.0000	0.0002	0.0028
Petroleum refineries		22	0.0082	0.0151	0.0000	0.0682	0.0002	0.0027	0.0189	
Phosphate fertilizer production		4	0.0342	0.0361	0.0023	0.0724	0.0023	0.0310	0.0724	
NO <sub>x</sub>	Ethanol production	1	0.5560		0.5560	0.5560	0.5560	0.5560	0.5560	
	Methanol production (from natural gas)	1	0.0101		0.0101	0.0101	0.0101	0.0101	0.0101	
	Natural gas liquids production	8	0.0012	0.0028	0.0000	0.0081	0.0000	0.0001	0.0060	
	Nitrogen fertilizer production	1	0.0200		0.0200	0.0200	0.0200	0.0200	0.0200	
	Petroleum refineries	23	0.0096	0.0108	0.0000	0.0439	0.0000	0.0070	0.0225	
	Phosphate fertilizer production	6	0.3484	0.2972	0.0350	0.7549	0.0371	0.3184	0.7401	

TABLE A-3 Cont.

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90
SO <sub>2</sub>	Ethanol production	1	0.3985		0.3985	0.3985	0.3985	0.3985	0.3985
	Natural gas liquids production	6	0.0685	0.0798	0.0004	0.2046	0.0004	0.0427	0.1961
	Nitrogen fertilizer production	1	0.4987		0.4987	0.4987	0.4987	0.4987	0.4987
	Petroleum refineries	20	0.0542	0.0649	0.0000	0.2025	0.0014	0.0184	0.1582
	Phosphate fertilizer production	7	7.0935	4.1986	2.1853	13.9789	2.3881	5.8044	13.2213
PM <sub>10</sub> filterables only	Bituminous coal and lignite surface mining and processing	7	0.0363	0.0416	0.0044	0.1027	0.0053	0.0144	0.1001
	Bituminous coal underground mining and processing	1	0.0279		0.0279	0.0279	0.0279	0.0279	0.0279
	Methanol production (from natural gas)	1	0.1607		0.1607	0.1607	0.1607	0.1607	0.1607
	Nitrogen fertilizer production	1	0.3319		0.3319	0.3319	0.3319	0.3319	0.3319
	Petroleum refineries	14	0.0071	0.0132	0.0000	0.0501	0.0000	0.0019	0.0180
	Phosphate fertilizer production	7	0.8913	1.2155	0.0007	3.0611	0.0084	0.2254	2.8777
	Bituminous coal and lignite surface mining and processing	2	0.0136	0.0016	0.0125	0.0147	0.0125	0.0136	0.0147
PM <sub>10</sub> filterables + condensable	Bituminous coal underground mining and processing	7	0.0058	0.0045	0.0016	0.0135	0.0016	0.0044	0.0128
	Ethanol production	6	3.2478	1.0183	1.3554	4.2906	1.5354	3.4441	4.2412
	Nitrogen fertilizer production	1	0.2539		0.2539	0.2539	0.2539	0.2539	0.2539
	Petroleum refineries	6	0.0054	0.0070	0.0005	0.0193	0.0006	0.0025	0.0179

TABLE A-4 Summary of Electric Utility Emission Factors (g/kWh)

Pollutant	Group	Count	Mean	StdDev	Min	Max	P10	Median	P90
VOC	Coal+lignite	27	0.026423	0.038794	0.000126	0.176366	0.007468	0.012626	0.034197
	NG boilers	8	0.026784	0.014759	0.003807	0.045803	0.004550	0.031647	0.043446
	NG turbines	9	0.085191	0.128825	0.001641	0.367043	0.001696	0.013462	0.307075
	Oil	5	0.045430	0.015872	0.027278	0.062083	0.027278	0.042000	0.062083
CO	Coal+lignite	26	0.216240	0.446099	0.054603	2.356890	0.068703	0.097910	0.291540
	NG boilers	8	0.296644	0.167050	0.095308	0.537488	0.101764	0.287508	0.518864
	NG turbines	7	0.254231	0.360279	0.004361	1.003970	0.005347	0.103787	0.887622
	Oil	5	0.908033	1.434480	0.158361	3.467710	0.158361	0.270440	3.467710
NO <sub>x</sub>	Coal+lignite	26	2.420490	1.314110	0.992241	6.674410	1.250440	2.007560	4.511170
	NG boilers	9	1.031530	0.800781	0.033605	2.204390	0.102272	1.019400	2.162880
	NG turbines	8	1.441160	1.768880	0.007422	4.566450	0.008809	0.849782	4.267760
	Oil	4	1.434610	0.498601	0.982138	2.012720	0.982138	1.371800	2.012720
SO <sub>2</sub>	Coal+lignite	25	6.715010	4.371770	0.753194	18.301600	1.465620	5.715080	11.222100
	NG boilers	9	0.131082	0.346467	0.001384	1.052710	0.001895	0.006188	0.662398
	NG turbines	5	0.013368	0.022736	0.001957	0.053977	0.001957	0.003253	0.053977
	Oil	5	5.272380	4.261130	0.019976	11.812700	0.019976	5.284780	11.812700
PM <sub>10</sub> filterables only	Coal+lignite	21	0.041149	0.092955	0.000054	0.428803	0.000257	0.008670	0.081956
	NG boilers	8	0.014019	0.021522	0.000593	0.059444	0.000594	0.002507	0.051728
	NG turbines	4	0.029159	0.021542	0.002432	0.053850	0.002432	0.030178	0.053850
	Oil	3	0.250416	0.373602	0.029141	0.681765	0.029141	0.040340	0.681765
PM <sub>10</sub> filterables + condensable	Coal+lignite	12	0.245485	0.542284	0.001797	1.940030	0.006615	0.067251	0.768614
	Oil	2	0.015297	0.016563	0.003585	0.027009	0.003585	0.015297	0.027009

**APPENDIX B**  
**GENERATION OF EMISSION FACTOR DISTRIBUTIONS**

**TABLE B-1 Fuel Combustion Sources (units are g/mmBtu of fuel input)**

Item	Description
NG-fired utility/industrial boilers	
VOC	Distribution fit to NEI data
CO	Distribution fit to NEI data
NO <sub>x</sub>	Minimum changed to match that of <i>Power Magazine</i> (Schwieger et al. 2002) and the maximum matches the 98th percentile of NEI data
PM <sub>10</sub>	Distribution fit to NEI data
NG-fired small industrial boilers	
VOC	Distribution fit to NEI data
CO	Minimum changed to 5. Mean is 20% reduction from AP-42.
NO <sub>x</sub>	Minimum set to match large boiler. Distribution adjusted to make mean below average AP-42 factors.
PM <sub>10</sub>	Distribution fit to NEI data
NG-fired large gas turbines, combined-cycle gas turbines, and small gas turbines	
VOC	Assumed future controls on high emitters, so maximum set to the second highest NEI data point.
CO	Assumed future controls on high emitters, so maximum set to equal AP-42 controlled. Mean close to AP-42 average.
NO <sub>x</sub>	Assumed future controls on high emitters, so maximum set to match 2nd highest point
PM <sub>10</sub>	Distribution fit to NEI data
NG-fired reciprocating engines	
VOC	Distribution fit to NEI data
CO	Minimum changed to 5
NO <sub>x</sub>	Distribution set to match diesel engine distribution
PM <sub>10</sub>	Distribution fit to NEI data
Oil-fired utility boilers, industrial boilers, and commercial boilers	
VOC	Distribution fit to NEI data
CO	Distribution fit to NEI data
NO <sub>x</sub>	Distribution fit to NEI data
PM <sub>10</sub>	Distribution fit to NEI data
SO <sub>x</sub>	NEI data would have given emission factors higher than coal fired, so we lowered the minimum to about half that of coal (to match relative sulfur content). Distribution adjusted to make mean double the coal mean because few SO <sub>x</sub> controls than with coal.
Diesel-fired industrial boilers and commercial boilers	
VOC	Distribution fit to NEI data
CO	Distribution fit to NEI data
NO <sub>x</sub>	Assumed future controls on high emitters, so maximum of the distribution was set to match the maximum factor for AP-42
PM <sub>10</sub>	Maximum and minimum match NEI data, but exponential function used to keep mean below the mean for residual oil

TABLE B-1 (Cont.)

Item	Description
Diesel-fired reciprocating engines	
VOC	Maximum set to 250, corresponding to the maximum in the uncontrolled heavy-duty off-road engines
CO	Maximum set to 250 and minimum set to 20. Beta distribution was adjusted to make the mean equal to 100, which corresponds to value in the heavy-duty off-road engines.
NO <sub>x</sub>	Minimum set to match 2010 heavy-duty engine standard. Maximum set to the maximum uncontrolled AP-42 factor. Resulting distribution has a mean of about half of that for NEI data.
PM <sub>10</sub>	Little data in NEI, so distribution set equivalent to controlled value for 2010 heavy-duty engine standards (0.01 g/bhph), a median consistent with 0.3 g/bhph, and a maximum near the maximum of the NEI data
Gasoline-fired reciprocating engines	
VOC	No data from NEI. Distribution function for diesel-fired reciprocating engines was adjusted with the difference of gasoline farming tractors and diesel farming tractors.
CO	No data from NEI. Distribution function for diesel-fired reciprocating engines was adjusted with the difference of gasoline farming tractors and diesel farming tractors.
NO <sub>x</sub>	No data from NEI. Distribution function for diesel-fired reciprocating engines was adjusted with the difference of gasoline farming tractors and diesel farming tractors.
PM <sub>10</sub>	No data from NEI. Distribution function for diesel-fired reciprocating engines was adjusted with the difference of gasoline farming tractors and diesel farming tractors.
LPG-fired industrial boilers <sup>a</sup>	
NO <sub>x</sub>	Distribution adjusted to make mean about a 40% reduction from NEI data
LPG-fired commercial boilers <sup>a</sup>	
NO <sub>x</sub>	Not enough NEI data to establish a distribution. Distribution was based on LPG industrial boilers, but mean was increased.
Coal-fired industrial boilers	
VOC	Minimum and maximum set to match AP-42 range
CO	Minimum set to match AP-42 minimum and maximum set to match AP-42 maximum
NO <sub>x</sub>	Minimum and maximum were set to match <i>Power Magazine</i> (Schwieger et al. 2002) values. The resulting mean is 40% below NEI data.
PM <sub>10</sub>	No data from NEI
SO <sub>x</sub>	Adjusted distribution to 50% of NEI data to reflect expected controls by 2016

<sup>a</sup> Distribution functions were established only for NO<sub>x</sub> emissions of LPG-fired industrial and commercial boilers. Emissions for other pollutants were point estimates.

**TABLE B-2 Non-Combustion Sources (units are grams/million Btu of fuel throughput)**

Item	Description
<b>Petroleum-refinery process emissions for gasoline production<sup>a</sup></b>	
VOC	Assumed future controls on high emitters, so maximum set to match 4th highest point
CO	Assumed future controls on high emitters, so maximum set to match 2nd highest point. Skewed distribution to left to represent future controls.
NO <sub>x</sub>	Assumed future controls on high emitters, so maximum set to match 3rd highest point
PM <sub>10</sub>	Assumed future controls on high emitters, so maximum changed to the second highest NEI point. Mean consistent with mode.
SO <sub>x</sub>	Assumed future controls on high emitters, so maximum reduced to 25. Based on future controls, distribution was skewed to the left to make a mean at 50% of the NEI data.
VOC from gasoline bulk terminals	Assumed future controls on high emitters, so maximum reduced to match 3rd highest NEI data point
VOC from gasoline refueling stations	Maximum of distribution matches current NEI data. Minimum set to match well-controlled value. Distribution based on assumption that more than half of stations will have controls by 2016.
VOC from LPG refueling stations	No data from NEI. Assumed to be 10% of gasoline station VOC evaporative emissions.
VOC from diesel bulk terminals	Distribution fit to NEI data
VOC from diesel refueling stations	Distribution fit to NEI data
VOC from naphtha bulk terminals	No data from NEI. Assumed to be the same as the gasoline bulk terminal evaporative emissions.
VOC from naphtha refueling stations	No data from NEI. Assumed to be the same as the gasoline station evaporative emissions.
<b>Process-related emissions of NG processing plants</b>	
VOC	NEI emission data for natural gas liquids plants were allocated to NG and LPG (85% and 15%, respectively). Set the maximum value to ERG maximum value of 11. This gives a mean value similar to independently obtained data.
CO	NEI emission data for natural gas liquids plants were allocated to NG and LPG (85% and 15%, respectively). Set the maximum value to 3, the minimum value to 0, and the mean value to 1.1, which were similar to independently obtained data.
NO <sub>x</sub>	NEI emission data for natural gas liquids plants were allocated to NG and LPG (85% and 15%, respectively). Set the maximum value to 6.7 (which was the highest in NEI data), the minimum value to 0, and the mean value similar to independently obtained data.
PM <sub>10</sub>	NEI emission data for natural gas liquids plants were allocated to NG and LPG (85% and 15%, respectively). Set the maximum value to 0.07 (which was from independently obtained data) and the minimum value to 0 (which was from the NEI data).
SO <sub>x</sub>	NEI emission data for natural gas liquids plants were allocated to NG and LPG (85% and 15%, respectively). Set the maximum value to 50 and shifted the distribution function for the mean value to be 10 to be close to independently obtained values.
<b>Hydrogen plant process emissions<sup>b</sup></b>	
VOC	A distribution was created with maximum, minimum, and mode consistent with non-methane VOC data received from current hydrogen manufacturers
CO	A distribution was created with maximum, minimum, and mode consistent with data received from current hydrogen manufacturers
NO <sub>x</sub>	See text
PM <sub>10</sub>	A distribution was created with maximum, minimum, and mode consistent with data received from current hydrogen manufacturers

TABLE B-2 (Cont.)

Item	Description
MeOH plant process emissions <sup>b</sup>	
VOC, CO, NO <sub>x</sub> , and PM <sub>10</sub>	No data were available, so distributions were based on distributions for hydrogen reforming with adjustments for relative efficiency of hydrogen and methanol production
VOC from MeOH refueling stations	
FT diesel plant process emissions <sup>b</sup>	
VOC, CO, NO <sub>x</sub> , and PM <sub>10</sub>	No data were available, so distributions were based on distributions for hydrogen reforming with adjustments for relative efficiency of hydrogen and Fisher Tropsch diesel production
Corn ethanol plant process emissions	
VOC	See text
PM <sub>10</sub>	Assumed future controls on high emitters, so maximum set to 2nd highest NEI data point
Cellulosic ethanol process emissions	
VOC	No data from NEI. Assumed to be 50% of corn ethanol plant VOC emissions per gallon.
PM <sub>10</sub>	No data from NEI. Assumed to be the same as corn ethanol plant PM <sub>10</sub> emissions per gallon.
VOC from EtOH bulk terminals	No data from NEI. Assumed to be the same as gasoline bulk terminal VOC emissions.
VOC from EtOH refueling stations	No data from NEI. Assumed to be the same as gasoline station VOC emissions.
PM <sub>10</sub> emissions of coal mining	
Underground mining	Future controls assumed on high emitters, so maximum set to 2nd highest NEI data point
Surface mining	Future controls assumed on high emitters, so maximum set to 2nd highest NEI data point. The high values in the distribution are likely to represent coarse particulates.

<sup>a</sup> Distribution functions of criteria pollutant emissions were established for gasoline production in refineries. Distribution functions for residual oil, LPG, diesel, and crude naphtha are derived from those for gasoline with adjustment of relative refining energy efficiency between gasoline and each of the other fuels.

<sup>b</sup> Distribution functions of criteria pollutant emissions were established for hydrogen production in SMR plants. Distribution functions for methanol and FT diesel plants are derived from those for hydrogen plants, with adjustment of relative energy efficiency between that of hydrogen and those of methanol and FT diesel.



**APPENDIX C**  
**WELL-TO-TANK ENERGY AND EMISSIONS RESULTS**

**TABLE C-1 Well-to-Tank Energy and Emissions Results (Btu or Grams for Each Million Btu of Fuel Available in Vehicle Tanks)**

	Total Energy	WTT Efficiency (%)	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
<b>30 ppm S RFG without oxygenate for DOD SI engine</b>																		
10%	215,938	77.4	212,300	101,440	16,821	105.4	0.266	19,347	13.84	9.13	37.23	5.12	19.68	7.03	2.28	8.64	0.67	6.33
50%	253,017	79.8	248,596	118,430	19,558	108.3	0.330	22,140	23.54	11.72	44.06	9.34	26.96	13.48	3.32	11.87	0.88	8.78
90%	292,024	82.2	286,977	136,527	22,357	111.3	0.376	25,027	46.02	15.90	51.91	14.69	38.18	28.71	4.72	15.81	1.16	12.56
<b>10 ppm S RFG without oxygenate for DI SI engine</b>																		
10%	224,340	76.1	220,599	105,790	17,461	106.2	0.296	19,989	14.04	9.12	37.57	5.07	20.00	7.15	2.31	8.83	0.68	6.41
50%	252,344	79.9	247,927	118,238	19,525	108.2	0.329	22,113	23.71	11.72	44.02	9.60	26.81	13.64	3.35	11.98	0.89	8.77
90%	280,895	81.7	275,944	130,598	21,616	110.4	0.363	24,249	46.53	15.91	51.78	14.91	37.64	28.93	4.71	15.80	1.15	12.48
<b>5 ppm S gasoline for gasoline-powered FP FCV</b>																		
10%	216,887	77.4	213,284	101,469	16,881	105.4	0.288	19,395	13.84	9.11	37.58	5.02	19.84	7.00	2.24	8.71	0.67	6.32
50%	252,094	79.9	247,703	118,233	19,514	108.2	0.329	22,097	23.42	11.65	44.12	9.47	26.74	13.38	3.33	11.93	0.88	8.89
90%	292,438	82.2	287,321	136,808	22,409	111.3	0.376	25,096	45.96	15.80	52.34	15.08	37.94	28.52	4.75	15.94	1.17	12.56
<b>10 ppm low-sulfur diesel</b>																		
10%	169,848	79.2	166,535	77,983	13,456	101.6	0.234	15,875	5.92	8.37	34.40	4.35	17.73	1.86	1.91	7.35	0.55	5.33
50%	213,987	82.4	210,090	98,930	16,658	105.1	0.268	19,157	7.59	10.87	40.75	8.07	24.40	2.88	2.82	10.12	0.76	7.80
90%	263,375	85.5	258,679	122,332	20,142	109.1	0.343	22,743	10.22	14.97	48.63	13.07	34.86	4.57	4.25	13.93	1.04	11.54
<b>Crude naphtha</b>																		
10%	117,081	83.3	114,704	52,468	9,607	97.4	0.171	11,893	13.14	7.52	30.35	3.33	15.12	6.77	0.48	1.90	0.05	0.82
50%	157,279	86.4	154,116	71,579	12,530	100.5	0.219	14,909	22.75	9.70	35.87	6.05	20.81	13.15	0.52	2.07	0.06	0.95
90%	201,146	89.5	197,465	92,593	15,777	104.0	0.270	18,257	45.41	13.56	43.09	9.93	29.85	28.30	0.61	2.31	0.07	1.64
<b>NA NG to compressed NG</b>																		
10%	115,966	83.9	106,299	2,909	9,111	236.2	0.149	14,808	3.22	4.72	16.55	4.32	13.55	0.13	0.43	1.59	0.05	1.05
50%	151,575	86.8	140,657	5,849	11,438	247.5	0.197	17,188	6.26	7.20	24.80	9.40	30.09	0.17	0.56	2.36	0.09	3.13
90%	191,971	89.6	180,428	9,519	14,106	258.7	0.251	19,985	9.76	13.71	36.35	16.03	56.73	0.21	0.73	3.24	0.14	7.28

TABLE C-1 (Cont.)

	Total Energy	WTT Efficiency (%)	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
NNA NG to compressed NG via liquefied NG (LNG)																			
10%	241,709	74.8	231,093	8,991	16,756	310.2	0.335	24,219	4.85	10.45	52.69	5.13	23.25	0.14	0.54	2.84	0.07	1.46	3.67
50%	286,667	77.7	274,926	12,467	19,690	324.3	0.398	27,286	8.34	14.23	67.35	10.57	41.65	0.16	0.68	3.68	0.11	8.12	8.12
90%	338,884	80.5	324,591	16,821	22,999	338.1	0.466	30,689	12.35	21.81	85.12	17.61	68.76	0.19	0.84	4.65	0.17	8.12	8.12
NNA NG to methanol																			
10%	543,710	59.9	543,022	32,442	19,983	160.6	0.392	23,863	12.67	20.87	75.68	11.71	24.40	1.65	0.94	4.49	0.12	1.43	1.43
50%	602,797	62.4	601,746	37,148	25,947	169.0	0.454	29,979	21.62	28.79	91.84	15.87	34.55	6.36	1.01	4.73	0.13	1.70	1.70
90%	689,101	64.8	667,900	42,683	31,977	177.4	0.530	36,155	44.30	39.48	112.65	19.22	51.67	21.51	1.13	5.03	0.14	2.13	2.13
NNA NG to FT diesel																			
10%	612,279	55.4	611,826	16,325	24,471	168.2	0.088	28,507	7.71	15.24	48.66	10.89	19.39	0.58	0.52	2.33	0.06	0.99	0.99
50%	705,181	58.6	704,368	21,167	27,908	179.5	0.154	32,125	12.45	23.07	61.51	15.27	30.38	0.95	0.58	2.55	0.07	1.22	1.22
90%	808,649	62.0	805,448	27,083	32,101	191.8	0.233	36,416	18.24	33.79	80.46	18.93	48.63	1.39	0.70	2.84	0.08	1.58	1.58
NNA NG to FT naphtha																			
10%	614,159	55.4	613,770	17,251	24,366	168.4	0.087	28,419	17.60	15.10	47.45	10.73	18.70	4.99	0.55	2.40	0.06	1.03	1.03
50%	703,106	58.7	702,306	21,830	27,707	179.6	0.151	31,868	28.54	23.02	60.05	15.18	28.59	11.27	0.59	2.53	0.07	1.19	1.19
90%	804,290	62.0	803,477	27,917	32,055	192.0	0.232	36,357	50.89	33.50	79.28	18.87	47.94	26.55	0.68	2.72	0.08	1.46	1.46
NA NG to GH <sub>2</sub> in central plants																			
10%	604,230	53.5	575,603	13,076	98,638	169.3	0.610	102,748	4.89	16.54	68.89	23.62	21.86	0.50	2.91	11.24	2.44	3.06	3.06
50%	724,223	58.0	694,017	17,231	107,552	183.3	0.697	111,981	6.72	24.74	90.13	36.94	60.04	0.78	4.52	14.75	3.42	9.14	9.14
90%	867,963	62.3	833,714	22,818	117,422	199.3	0.794	122,120	9.19	35.37	115.83	57.80	135.15	1.01	6.05	18.92	4.15	21.19	21.19
NNA NG to GH <sub>2</sub> in central plants via LNG																			
10%	782,568	48.1	752,905	21,744	111,168	324.2	0.881	118,954	9.53	27.48	126.21	24.99	43.96	0.63	3.28	13.58	2.49	3.77	3.77
50%	925,083	51.9	893,205	26,830	120,989	351.1	0.987	129,345	14.40	36.47	153.94	40.32	86.56	0.90	4.89	17.22	3.45	10.10	10.10
90%	1,077,818	56.1	1,043,775	33,225	131,592	380.0	1.110	140,527	20.36	48.42	186.92	60.08	164.58	1.13	6.41	21.46	4.22	22.57	22.57

**TABLE C-1 (Cont.)**

	Total Energy	WTT Efficiency (%)	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
<b>NA NG to GH<sub>2</sub> in refueling stations</b>																			
10%	611,393	49.3	584,951	6,373	99,870	336.1	0.604	107,816	7.91	18.73	54.16	24.20	27.94	1.26	6.49	16.18	6.60	2.67	
50%	801,443	55.5	770,201	10,819	112,650	376.2	0.712	121,499	12.47	28.43	75.96	38.86	89.14	2.08	11.69	23.32	9.51	8.70	
90%	1,028,722	62.1	995,044	16,894	127,445	424.5	0.837	137,419	18.12	43.18	102.39	57.41	144.29	2.95	18.73	32.97	12.32	20.84	
<b>NNA NG to GH<sub>2</sub> in refueling stations via LNG</b>																			
10%	800,275	44.2	771,892	15,575	111,383	493.3	0.882	123,097	10.64	28.72	111.00	25.45	42.81	1.27	6.60	17.78	6.57	3.42	
50%	1,004,730	49.9	974,433	20,977	124,914	551.0	1.015	137,856	15.86	39.68	140.00	40.83	86.48	2.10	11.70	24.81	9.52	9.65	
90%	1,262,081	55.5	1,226,008	28,138	141,879	622.7	1.183	156,376	22.30	56.16	177.45	59.83	165.77	2.95	18.92	34.71	12.32	22.23	
<b>NA NG to LH<sub>2</sub> in central plants</b>																			
10%	1,169,772	38.6	1,168,861	10,139	131,450	204.0	1.413	136,592	7.61	16.82	85.00	11.78	9.22	0.50	1.30	7.34	1.09	0.68	
50%	1,366,428	42.3	1,364,957	16,647	144,798	221.4	1.641	150,370	14.41	25.93	147.09	16.09	24.99	0.79	2.03	13.10	1.50	1.42	
90%	1,590,068	46.1	1,588,399	24,841	160,106	241.9	1.909	166,194	22.42	40.90	229.57	19.51	50.90	1.14	2.85	21.12	1.82	2.56	
<b>NNA NG to LH<sub>2</sub> in central plants</b>																			
10%	1,249,477	37.3	1,248,295	17,522	138,098	213.3	1.492	143,446	8.69	20.64	139.14	12.68	20.16	0.17	0.46	5.33	0.07	1.37	
50%	1,451,060	40.8	1,450,010	24,556	152,222	232.7	1.729	158,042	15.69	30.19	203.16	17.24	36.43	0.22	0.53	5.82	0.08	1.63	
90%	1,680,645	44.5	1,679,094	33,322	167,768	253.1	2.010	174,094	24.23	46.05	290.57	21.27	63.13	0.29	0.65	6.37	0.09	2.06	
<b>NA NG to LH<sub>2</sub> in refueling stations</b>																			
10%	1,448,828	27.6	1,318,791	25,983	162,718	433.3	1.618	173,314	14.37	34.99	132.78	73.96	102.48	1.65	10.48	31.62	7.64	14.86	
50%	1,978,881	33.6	1,792,112	39,489	203,360	504.0	2.273	215,662	20.69	52.14	220.20	161.34	311.28	2.52	16.50	47.99	10.75	48.81	
90%	2,625,644	40.8	2,359,753	54,200	251,564	584.9	3.115	266,030	28.17	75.81	348.56	296.22	789.48	3.42	24.79	70.60	13.71	125.90	
<b>NNA NG to LH<sub>2</sub> in refueling stations via LNG</b>																			
10%	1,696,182	25.3	1,566,510	36,268	174,717	598.6	1.918	189,406	17.32	45.21	192.50	74.02	116.24	1.63	10.57	32.88	7.66	15.53	
50%	2,249,451	30.8	2,054,256	49,648	215,155	682.0	2.575	231,564	23.98	63.24	283.08	162.14	330.16	2.53	16.73	49.70	10.81	49.99	
90%	2,946,637	37.1	2,678,620	66,031	267,120	781.7	3.458	286,077	32.46	88.18	415.90	309.16	814.72	3.46	24.42	72.81	13.74	128.56	

TABLE C-1 (Cont.)

	Total Energy	WTT Efficiency (%)	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
Corn to ethanol																			
10%	692,783	55.3	678,691	73,694	-23,578	102.9	37,677	-7,573	28.67	42.42	117.51	38.58	48.28	4.80	0.22	2.08	0.06	1.42	
50%	748,694	57.2	732,839	81,469	-19,397	111.6	55,312	-221	40.92	52.90	135.57	58.22	76.60	10.97	0.41	3.18	0.12	4.34	
90%	807,904	59.1	790,231	99,970	-14,981	121.2	75,933	7,679	64.20	67.15	156.78	82.80	118.48	26.19	0.63	4.47	0.20	10.23	
Cellulosic biomass to ethanol																			
10%	1,090,660	35.8	33,454	72,596	-89,076	2.2	22,287	-80,559	34.34	80.94	130.62	7.70	-32.32	5.12	0.38	0.91	-0.01	-5.96	
50%	1,390,238	41.8	60,561	84,793	-83,190	5.1	30,903	-73,864	44.21	92.78	150.29	16.84	-7.73	11.26	0.56	1.88	0.04	-2.02	
90%	1,790,295	47.8	91,655	99,724	-77,779	8.4	41,669	-67,239	67.01	108.27	174.95	25.58	3.97	26.34	0.72	2.68	0.09	-0.13	
U.S. average electricity to GH <sub>2</sub> in refueling stations																			
10%	2,256,709	25.2	1,944,546	53,256	259,773	359.9	4,570	269,390	22.06	44.25	260.29	177.92	246.33	0.93	9.38	45.38	1.64	41.72	
50%	2,585,834	27.9	2,234,268	60,808	287,982	396.5	5,038	298,546	25.36	73.50	471.36	409.98	860.16	1.35	14.68	79.57	3.46	139.19	
90%	2,966,213	30.7	2,571,193	69,651	321,115	439.8	5,574	332,849	29.19	103.76	693.65	689.22	2,050	1.86	20.54	115.18	5.63	331.31	
U.S. average electricity to LH <sub>2</sub> in refueling stations																			
10%	3,152,411	18.2	2,716,193	74,409	332,253	459.2	5,820	344,601	28.55	58.80	351.41	236.10	332.23	1.21	12.36	61.00	2.12	56.42	
50%	3,765,527	21.0	3,256,416	88,698	382,727	526.7	6,683	396,787	33.76	97.28	628.03	542.28	1,102	1.78	19.52	106.12	4.63	180.40	
90%	4,483,130	24.1	3,861,597	105,521	442,871	607.6	7,720	458,972	39.95	140.87	942.33	930.18	2,616	2.45	27.76	156.66	7.58	424.71	
CA average electricity to GH <sub>2</sub> in refueling stations																			
10%	1,818,967	29.3	1,382,296	9,841	164,891	315.4	3,266	173,171	13.81	40.50	149.05	73.55	99.53	0.96	10.32	30.87	1.40	13.02	
50%	2,092,202	32.3	1,595,492	12,934	182,134	347.6	3,589	191,186	18.44	56.75	237.71	166.16	338.92	1.67	15.82	48.74	2.20	51.49	
90%	2,409,212	35.5	1,843,703	16,986	202,489	385.7	3,961	212,425	23.67	83.57	335.02	278.20	823.24	2.64	24.80	68.95	3.10	129.36	
CA average electricity to LH <sub>2</sub> in refueling stations																			
10%	2,601,979	21.2	1,979,881	14,639	211,062	404.0	4,171	221,648	18.15	53.83	200.92	97.31	135.29	1.25	13.62	40.63	1.84	17.54	
50%	3,108,612	24.3	2,376,100	19,380	242,649	462.2	4,773	254,705	24.41	79.04	316.87	220.26	443.72	2.18	21.16	62.05	2.92	67.22	
90%	3,712,411	27.8	2,846,676	25,764	279,025	530.7	5,495	282,800	31.91	114.41	457.40	375.74	1,049	3.42	34.08	93.87	4.17	164.44	

TABLE C-1 (Cont.)

	Total Energy	WTT Efficiency (%)	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
NGCC electricity to GH <sub>2</sub> in refueling stations																			
10%	1,796,970	27.5	1,796,106	3,356	167,398	467.7	4.143	179,976	16.26	54.21	53.11	7.44	11.61	2.04	16.48	13.14	2.50	0.70	0.70
50%	2,182,025	31.4	2,180,806	12,294	191,441	534.7	4.714	205,251	27.86	105.51	78.04	9.32	32.28	5.12	37.28	16.50	3.07	1.12	1.12
90%	2,633,822	35.8	2,631,497	23,442	219,989	612.3	5.379	235,272	41.75	197.81	123.01	12.20	68.23	9.24	76.70	29.76	4.06	1.85	1.85
NGCC electricity to LH <sub>2</sub> in refueling stations																			
10%	2,604,835	20.1	2,603,641	4,595	215,560	604.6	5.345	231,318	20.48	69.50	67.35	9.57	14.93	2.49	21.81	16.91	3.27	0.90	0.90
50%	3,226,203	23.7	3,224,036	15,776	253,664	708.9	6.272	271,791	36.78	138.26	100.77	12.34	42.07	6.67	49.60	21.58	4.09	1.45	1.45
90%	3,973,823	27.7	3,972,334	30,959	299,591	837.1	7.331	320,971	55.09	272.21	160.92	16.28	89.54	12.25	106.30	38.41	5.45	2.37	2.37
Renewable electricity to GH <sub>2</sub> in refueling stations																			
10%	458,965	57.0	0	0	0	0.0	0.000	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50%	592,616	62.8	0	0	0	0.0	0.000	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90%	755,041	68.5	0	0	0	0.0	0.000	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
U.S. average electricity to GH <sub>2</sub> in refueling stations with proposed IAQR																			
10%											90.31		132.84			17.29		23.73	
50%											225.56		504.68			40.18		64.39	
90%											577.61		1,325			96.96		214.24	
U.S. average electricity to LH <sub>2</sub> in refueling stations with proposed IAQR																			
10%											118.98		173.83			22.70		31.35	
50%											303.40		673.02			53.93		112.40	
90%											772.12		1,752			130.00		285.38	

**APPENDIX D**  
**WELL-TO-WHEELS RESULTS**

**TABLE D-1 Well-to-Wheels Results (Btu or Grams per Mile Driven)**

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
<b>RFG DOD SI CD</b>																	
10%	6,489	6,469	5,831	507	0.627	0.030	531	0.223	1,314	0.301	0.056	0.115	0.131	0.785	0.104	0.019	0.039
50%	6,823	6,800	6,092	528	0.654	0.030	552	0.330	4,001	0.389	0.082	0.165	0.199	2,466	0.162	0.023	0.053
90%	7,170	7,145	6,361	549	0.684	0.030	573	0.495	9,049	0.586	0.115	0.216	0.306	5,606	0.278	0.032	0.074
<b>RFG DI SI CD</b>																	
10%	5,733	5,713	5,142	449	0.562	0.029	471	0.212	1,315	0.275	0.053	0.098	0.125	0.799	0.099	0.018	0.032
50%	6,005	5,984	5,365	465	0.584	0.030	487	0.316	3,974	0.367	0.077	0.131	0.192	2,453	0.153	0.022	0.044
90%	6,292	6,269	5,594	482	0.608	0.030	504	0.474	9,139	0.568	0.105	0.194	0.293	5,667	0.279	0.032	0.061
<b>NA NG CNG DOD SI CD</b>																	
10%	6,071	6,016	16	365	1.615	0.015	407	0.067	1,350	0.197	0.053	0.077	0.022	0.816	0.055	0.014	0.007
50%	6,409	6,348	32	392	1.701	0.015	436	0.131	4,073	0.303	0.083	0.168	0.059	2,506	0.111	0.019	0.018
90%	6,759	6,693	53	421	1.785	0.015	466	0.259	9,233	0.500	0.121	0.318	0.139	5,712	0.231	0.028	0.041
<b>NNA NG CNG DOD SI CD</b>																	
10%	6,770	6,709	50	407	2.019	0.016	459	0.078	1,384	0.413	0.058	0.131	0.022	0.816	0.062	0.015	0.009
50%	7,154	7,089	69	438	2.127	0.016	492	0.142	4,116	0.542	0.090	0.232	0.059	2,509	0.118	0.019	0.021
90%	7,574	7,506	94	471	2.236	0.017	527	0.271	9,269	0.747	0.130	0.391	0.139	5,711	0.238	0.028	0.046
<b>Com EBS DOD SI CD</b>																	
10%	8,399	4,418	1,801	337	0.658	0.179	416	0.286	1,546	0.645	0.192	0.230	0.122	0.819	0.071	0.016	0.018
50%	8,835	4,734	1,932	359	0.702	0.251	451	0.398	4,120	0.774	0.280	0.349	0.189	2,422	0.127	0.020	0.032
90%	9,262	5,051	2,067	382	0.747	0.334	486	0.568	9,479	0.989	0.386	0.529	0.296	5,762	0.249	0.029	0.059
<b>Cellulosic EBS DOD SI CD</b>																	
10%	10,150	1,849	1,807	78	0.256	0.118	127	0.306	1,713	0.703	0.078	-0.077	0.123	0.822	0.068	0.015	-0.008
50%	11,411	2,023	1,936	102	0.272	0.153	154	0.410	4,278	0.837	0.113	0.010	0.190	2,424	0.120	0.019	0.007
90%	13,062	2,211	2,068	124	0.290	0.197	181	0.579	9,650	1.053	0.147	0.051	0.296	5,771	0.244	0.029	0.015

TABLE D-1 (Cont.)

	Total Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
NA NG Central GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	7,194	7,062	59	443	0.767	0.031	470	0.040	0.628	0.434	0.137	0.099	0.010	0.332	0.108	0.028	0.014
50%	7,815	7,675	78	488	0.838	0.031	516	0.082	2,429	0.563	0.208	0.272	0.035	1,459	0.166	0.034	0.041
90%	8,533	8,382	103	536	0.918	0.032	566	0.171	6,116	0.799	0.296	0.614	0.089	3,757	0.289	0.043	0.097
NA NG Central GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.401					0.086			
50%									0.539					0.137			
90%									0.744					0.256			
NNA NG Central GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	8,011	7,872	98	498	1.461	0.032	541	0.071	0.697	0.701	0.144	0.199	0.010	0.351	0.119	0.028	0.017
50%	8,733	8,583	121	548	1.597	0.032	595	0.121	2,402	0.874	0.213	0.394	0.036	1,409	0.175	0.034	0.046
90%	9,538	9,381	151	602	1.747	0.033	652	0.210	6,095	1.103	0.305	0.744	0.091	3,715	0.296	0.043	0.102
NNA NG Central GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.663					0.097			
50%									0.828					0.147			
90%									1.061					0.267			
NA NG Station GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	7,259	7,135	29	451	1.520	0.031	495	0.063	0.672	0.370	0.140	0.126	0.016	0.387	0.141	0.048	0.012
50%	8,170	8,027	49	510	1.711	0.031	558	0.112	2,369	0.517	0.207	0.313	0.042	1,440	0.208	0.062	0.039
90%	9,271	9,109	76	583	1.945	0.032	637	0.201	6,048	0.730	0.294	0.652	0.097	3,734	0.333	0.078	0.093
NA NG Station GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.334					0.117			
50%									0.470					0.181			
90%									0.686					0.300			

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
NNA NG Station GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	8,106	7,978	70	502	2,231	0.032	563	0.076	0.710	0.631	0.145	0.195	0.016	0.387	0.148	0.048	0.015
50%	9,083	8,944	95	567	2,502	0.033	634	0.128	2,414	0.814	0.217	0.393	0.042	1,441	0.216	0.062	0.044
90%	10,299	10,136	129	647	2,845	0.033	723	0.217	6,108	1,051	0.305	0.750	0.097	3,736	0.340	0.078	0.101
NNA NG Station GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.587					0.124		
50%										0.771					0.188		
90%										1,009					0.310		
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	14,656	12,632	345	1,168	1,625	0.049	1,219	0.124	0.876	1,356	0.833	1.102	0.013	0.401	0.302	0.025	0.189
50%	16,242	14,027	383	1,304	1,801	0.051	1,361	0.168	2,571	2,330	1,892	3,854	0.038	1,458	0.472	0.035	0.632
90%	18,116	15,697	426	1,465	2,014	0.053	1,527	0.256	6,269	3,308	3,155	9,299	0.093	3,753	0.662	0.047	1,506
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%										1,308					0.274		
50%										2,254					0.444		
90%										3,322					0.649		
Electrolysis CA Electricity GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	12,851	9,629	68	741	1,422	0.043	787	0.090	0.808	0.838	0.362	0.450	0.014	0.409	0.221	0.023	0.059
50%	14,020	10,695	87	826	1,584	0.044	876	0.138	2,500	1,269	0.786	1,544	0.040	1,465	0.321	0.029	0.234
90%	15,577	11,921	111	923	1,767	0.046	977	0.227	6,202	1,723	1,292	3,735	0.094	3,760	0.473	0.038	0.564
Electrolysis CA Electricity GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.800					0.194		
50%										1,228					0.299		
90%										1,705					0.453		



**TABLE D-1 (Cont.)**

	Total Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
Electrolysis NGCC Electricity GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	12,574	12,567	15	754	2,111	0.047	820	0.112	1,078	0.366	0.061	0.053	0.026	0.540	0.116	0.027	0.003
50%	14,379	14,373	56	867	2,429	0.049	938	0.186	2,915	0.539	0.073	0.146	0.057	1,664	0.185	0.033	0.005
90%	16,574	16,563	106	1,002	2,807	0.053	1,080	0.287	6,634	0.802	0.091	0.309	0.114	3,981	0.318	0.042	0.008
Electrolysis NGCC Electricity GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.327					0.094			
50%									0.484					0.155			
90%									0.749					0.286			
NA NG Central LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	9,748	9,743	46	592	0.922	0.034	624	0.064	0.644	0.538	0.082	0.042	0.010	0.336	0.095	0.020	0.003
50%	10,712	10,706	75	657	1.012	0.035	690	0.119	2,387	0.852	0.103	0.113	0.034	1,412	0.161	0.025	0.006
90%	11,839	11,832	113	731	1.113	0.037	767	0.211	6,152	1,266	0.124	0.230	0.089	3,762	0.263	0.034	0.012
NA NG Central LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.502					0.074			
50%									0.811					0.134			
90%									1.207					0.249			
NNA NG Central LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	10,089	10,084	79	620	0.965	0.035	653	0.070	0.669	0.772	0.086	0.091	0.007	0.327	0.069	0.014	0.006
50%	11,113	11,106	111	689	1.061	0.036	724	0.126	2,402	1,114	0.109	0.165	0.031	1,405	0.123	0.018	0.007
90%	12,259	12,252	152	767	1.165	0.037	805	0.218	6,169	1,533	0.131	0.286	0.086	3,752	0.246	0.027	0.009
NNA NG Central LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.735					0.047			
50%									1.065					0.095			
90%									1.469					0.210			

**TABLE D-1 (Cont.)**

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
NA NG Station LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																		
10%	11,045	10,466	118	736	1,956	0.035	793	0.095	0.755	0.752	0.364	0.466	0.018	0.399	0.222	0.053	0.067	
50%	13,488	12,638	175	921	2,293	0.038	985	0.148	2,508	1.173	0.765	1.410	0.042	1,484	0.327	0.068	0.221	
90%	16,435	15,245	246	1,146	2,664	0.042	1,218	0.239	6,276	1,796	1,381	3,604	0.097	3,833	0.482	0.083	0.574	
NA NG Station LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																		
10%										0.725					0.203			
50%										1.131					0.301			
90%										1.733					0.446			
NNA NG Station LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																		
10%	12,167	11,562	164	789	2,703	0.037	862	0.107	0.803	1.031	0.368	0.526	0.018	0.401	0.229	0.053	0.071	
50%	14,700	13,849	225	975	3,096	0.040	1,058	0.164	2,555	1,475	0.767	1,496	0.042	1,478	0.335	0.068	0.226	
90%	17,941	16,748	302	1,217	3,564	0.044	1,311	0.258	6,321	2,111	1,425	3,701	0.098	3,838	0.493	0.084	0.582	
NNA NG Station LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																		
10%										1.004					0.210			
50%										1.424					0.308			
90%										2.030					0.451			
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																		
10%	18,744	16,174	442	1,495	2,076	0.054	1,560	0.156	0.969	1.786	1.105	1.517	0.014	0.412	0.371	0.027	0.256	
50%	21,635	18,870	508	1,737	2,396	0.058	1,809	0.206	2,712	3.032	2,490	5.004	0.039	1,492	0.592	0.040	0.814	
90%	24,982	21,850	589	2,019	2,773	0.063	2,101	0.296	6,496	4,455	4,248	11,847	0.094	3,840	0.853	0.055	1.933	
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																		
10%										1.752					0.356			
50%										2.956					0.563			
90%										4.348					0.817			

**TABLE D-1 (Cont.)**

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis CA Electricity LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	16,231	12,349	90	951	1,824	0.047	1,007	0.112	0.883	1.069	0.473	0.613	0.016	0.426	0.269	0.025	0.079
50%	18,645	14,249	116	1,099	2,104	0.050	1,162	0.164	2.634	1.627	1.029	2.010	0.041	1.505	0.395	0.032	0.305
90%	21,509	16,471	151	1,273	2,425	0.053	1,345	0.257	6.389	2.290	1.733	4.743	0.096	3.854	0.585	0.042	0.746
Electrolysis CA Electricity LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%										1.038					0.249		
50%										1.571					0.365		
90%										2.225					0.558		
Electrolysis NGCC Electricity LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard)																	
10%	16,237	16,233	21	974	2,737	0.052	1,053	0.135	1.179	0.437	0.071	0.068	0.030	0.576	0.137	0.031	0.004
50%	19,114	19,109	72	1,150	3,224	0.056	1,240	0.227	2.969	0.644	0.087	0.191	0.066	1.675	0.211	0.037	0.007
90%	22,625	22,616	141	1,366	3,816	0.061	1,472	0.341	6.735	0.958	0.109	0.405	0.121	4.011	0.354	0.048	0.011
Electrolysis NGCC Electricity LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.412					0.117		
50%										0.603					0.182		
90%										0.926					0.325		
LS Diesel DI CI CD																	
10%	5,174	5,159	4,726	398	0,460	0,017	414	0,069	1,321	0,247	0,048	0,082	0,035	0,804	0,087	0,017	0,025
50%	5,454	5,437	4,939	426	0,483	0,017	442	0,132	3,937	0,339	0,068	0,112	0,074	2,431	0,142	0,022	0,037
90%	5,768	5,748	5,158	458	0,509	0,018	474	0,262	9,177	0,531	0,094	0,160	0,155	5,691	0,261	0,031	0,053
NNA NG FT Diesel DI CI CD																	
10%	7,150	7,148	73	445	0,758	0,016	468	0,087	1,391	0,325	0,077	0,087	0,025	0,797	0,052	0,014	0,004
50%	7,662	7,658	95	472	0,816	0,017	496	0,153	3,974	0,444	0,089	0,136	0,063	2,409	0,107	0,018	0,005
90%	8,206	8,203	122	501	0,881	0,017	526	0,280	9,239	0,648	0,121	0,218	0,142	5,695	0,227	0,027	0,007

32  
33

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
RFG DOD SI HEV																	
10%	5,042	5,025	4,519	392	0.501	0.029	412	0.202	1,338	0.256	0.050	0.092	0.119	0.816	0.093	0.018	0.031
50%	5,529	5,510	4,935	428	0.542	0.029	449	0.302	3,975	0.350	0.072	0.123	0.183	2,456	0.149	0.022	0.043
90%	5,911	5,890	5,246	453	0.575	0.030	475	0.451	9,116	0.542	0.099	0.175	0.278	5,655	0.268	0.031	0.059
RFG DI SI HEV																	
10%	4,679	4,663	4,192	366	0.470	0.029	385	0.198	1,365	0.238	0.049	0.081	0.118	0.834	0.087	0.017	0.026
50%	4,992	4,974	4,458	386	0.496	0.029	406	0.291	3,998	0.334	0.069	0.109	0.177	2,465	0.146	0.022	0.036
90%	5,276	5,255	4,688	405	0.520	0.029	425	0.442	9,056	0.531	0.094	0.153	0.273	5,818	0.269	0.031	0.051
NA NG CNG DOD SI HEV																	
10%	4,841	4,797	13	293	1.360	0.015	329	0.060	1,332	0.174	0.049	0.062	0.022	0.805	0.053	0.014	0.006
50%	5,303	5,252	27	324	1,462	0.015	362	0.123	3,931	0.275	0.074	0.139	0.059	2,422	0.106	0.018	0.015
90%	5,680	5,624	44	353	1,552	0.015	392	0.255	8,924	0.475	0.107	0.259	0.139	5,533	0.230	0.028	0.034
NNA NG CNG DOD SI HEV																	
10%	5,399	5,351	40	327	1,681	0.016	370	0.069	1,365	0.351	0.053	0.107	0.022	0.805	0.059	0.014	0.007
50%	5,928	5,873	57	362	1,815	0.016	408	0.133	3,976	0.474	0.079	0.192	0.059	2,426	0.112	0.019	0.018
90%	6,360	6,302	78	394	1,928	0.016	443	0.264	8,957	0.683	0.114	0.323	0.139	5,537	0.236	0.028	0.038
Com E85 DOD SI HEV																	
10%	6,534	3,455	1,413	263	0.536	0.149	328	0.252	1,433	0.531	0.161	0.184	0.111	0.778	0.066	0.015	0.015
50%	7,148	3,824	1,558	290	0.586	0.208	365	0.361	4,152	0.653	0.230	0.281	0.177	2,466	0.118	0.020	0.026
90%	7,611	4,140	1,691	313	0.630	0.275	400	0.515	9,372	0.858	0.317	0.424	0.275	5,729	0.240	0.028	0.047
Cellulosic E85 DOD SI HEV																	
10%	8,019	1,458	1,415	62	0.222	0.100	102	0.267	1,551	0.574	0.068	-0.061	0.112	0.778	0.061	0.015	-0.006
50%	9,193	1,629	1,562	81	0.238	0.128	125	0.371	4,282	0.704	0.096	0.008	0.178	2,467	0.113	0.019	0.005
90%	10,641	1,804	1,697	100	0.255	0.165	149	0.526	9,495	0.914	0.126	0.041	0.276	5,727	0.237	0.028	0.012

**TABLE D-1 (Cont.)**

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
<b>NA NG Central GH<sub>2</sub> DOD SI HEV (Bin 5 NO<sub>x</sub> Standard)</b>																	
10%	5,714	5,610	48	352	0.610	0.030	375	0.036	0.634	0.369	0.117	0.081	0.009	0.353	0.096	0.025	0.011
50%	6,376	6,259	63	397	0.683	0.031	422	0.078	2.447	0.502	0.175	0.220	0.035	1.478	0.153	0.031	0.034
90%	7,063	6,942	85	443	0.761	0.031	470	0.170	6.110	0.715	0.246	0.497	0.092	3.755	0.273	0.040	0.078
<b>NA NG Central GH<sub>2</sub> DOD SI HEV (Bin 2 NO<sub>x</sub> Standard)</b>																	
10%										0.337					0.075		
50%										0.457					0.124		
90%										0.658					0.235		
<b>NNA NG Central GH<sub>2</sub> DOD SI HEV (Bin 5 NO<sub>x</sub> Standard)</b>																	
10%	6,351	6,246	79	395	1.161	0.031	431	0.060	0.681	0.587	0.122	0.160	0.009	0.361	0.105	0.025	0.014
50%	7,102	6,983	99	446	1.301	0.032	486	0.107	2.473	0.738	0.180	0.319	0.035	1.472	0.162	0.031	0.037
90%	7,863	7,731	123	496	1.444	0.032	538	0.200	6.157	0.984	0.254	0.602	0.092	3.768	0.281	0.040	0.083
<b>NNA NG Central GH<sub>2</sub> DOD SI HEV (Bin 2 NO<sub>x</sub> Standard)</b>																	
10%										0.549					0.084		
50%										0.695					0.133		
90%										0.912					0.244		
<b>NA NG Station GH<sub>2</sub> DOD SI HEV (Bin 5 NO<sub>x</sub> Standard)</b>																	
10%	5,783	5,685	23	360	1.211	0.030	397	0.053	0.648	0.320	0.118	0.102	0.014	0.363	0.124	0.042	0.010
50%	6,643	6,531	40	415	1.394	0.031	456	0.100	2.452	0.446	0.174	0.253	0.040	1.499	0.187	0.054	0.032
90%	7,603	7,472	63	479	1.600	0.031	525	0.192	6.134	0.660	0.246	0.528	0.097	3.789	0.312	0.067	0.076
<b>NA NG Station GH<sub>2</sub> DOD SI HEV (Bin 2 NO<sub>x</sub> Standard)</b>																	
10%										0.279					0.099		
50%										0.403					0.159		
90%										0.606					0.274		

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
NNA NG Station GH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	6,463	6,356	56	400	1,778	0.031	450	0.064	0.688	0.531	0.124	0.157	0.014	0.384	0.129	0.042	0.013
50%	7,390	7,274	77	461	2,042	0.032	517	0.113	2,498	0.690	0.182	0.320	0.040	1,489	0.194	0.054	0.035
90%	8,453	8,317	105	529	2,327	0.032	592	0.206	6,168	0.920	0.255	0.605	0.097	3,791	0.316	0.067	0.081
NNA NG Station GH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%									0.490						0.106		
50%									0.644						0.166		
90%									0.872						0.279		
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	11,826	10,016	274	930	1,293	0.044	972	0.101	0.824	1,116	0.686	0.901	0.011	0.397	0.258	0.023	0.151
50%	13,227	11,424	312	1,060	1,471	0.047	1,107	0.147	2,622	1,916	1,538	3,098	0.037	1,509	0.404	0.032	0.509
90%	14,919	12,920	351	1,203	1,659	0.049	1,255	0.238	6,327	2,736	2,583	7,525	0.094	3,812	0.578	0.043	1,216
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%															0.231		
50%										1.084					0.373		
90%										1.839					0.551		
Electrolysis CA Electricity GH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	10,063	7,644	54	590	1,136	0.040	628	0.074	0.773	0.700	0.302	0.368	0.012	0.405	0.190	0.021	0.048
50%	11,416	8,708	70	673	1,291	0.041	714	0.122	2,573	1,063	0.642	1,243	0.039	1,519	0.279	0.027	0.189
90%	12,824	9,812	91	760	1,454	0.043	805	0.213	6,258	1,464	1,060	3,018	0.096	3,820	0.422	0.036	0.473
Electrolysis CA Electricity GH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%															0.165		
50%										0.656					0.251		
90%										1.010					0.397		

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis NGCC Electricity GH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	10,019	10,015	12	604	1,688	0.043	657	0.095	0.973	0.307	0.054	0.043	0.023	0.505	0.104	0.025	0.003
50%	11,704	11,700	45	704	1,974	0.045	764	0.161	2.770	0.468	0.065	0.119	0.053	1.608	0.166	0.030	0.004
90%	13,650	13,641	86	823	2,299	0.048	888	0.259	6.490	0.707	0.082	0.251	0.110	3.913	0.292	0.040	0.007
Electrolysis NGCC Electricity GH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.278					0.081		
50%										0.419					0.140		
90%										0.655					0.264		
NA NG Central LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	7,748	7,745	37	472	0.735	0.033	498	0.056	0.634	0.488	0.071	0.034	0.009	0.336	0.088	0.019	0.002
50%	8,713	8,709	61	534	0.825	0.034	563	0.107	2.397	0.729	0.089	0.092	0.034	1.440	0.149	0.023	0.005
90%	9,771	9,764	92	604	0.919	0.035	635	0.205	6.279	1.083	0.109	0.187	0.095	3.851	0.270	0.033	0.009
NA NG Central LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.419					0.066		
50%										0.681					0.120		
90%										1.025					0.236		
NNA NG Central LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	8,017	8,013	64	492	0.767	0.033	520	0.060	0.648	0.656	0.075	0.074	0.007	0.332	0.064	0.014	0.005
50%	9,059	9,055	90	561	0.865	0.034	591	0.113	2.416	0.937	0.094	0.134	0.032	1.435	0.118	0.018	0.006
90%	10,123	10,117	123	633	0.963	0.036	665	0.210	6.291	1.305	0.115	0.234	0.093	3.845	0.239	0.028	0.008
NNA NG Central LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.615					0.043		
50%										0.889					0.091		
90%										1.233					0.202		

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
NA NG Station LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	8,889	8,414	95	592	1,576	0.034	639	0.080	0.722	0.638	0.302	0.376	0.015	0.388	0.193	0.046	0.055
50%	10,965	10,293	141	747	1,865	0.036	800	0.131	2.503	0.984	0.625	1.150	0.041	1.492	0.284	0.058	0.178
90%	13,524	12,525	202	944	2,191	0.040	1,005	0.226	6.363	1.506	1.127	2.954	0.101	3.901	0.430	0.073	0.470
NA NG Station LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.605					0.168		
50%										0.948					0.258		
90%										1.447					0.397		
NNA NG Station LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	9,831	9,322	132	636	2,157	0.035	699	0.091	0.762	0.861	0.300	0.428	0.015	0.389	0.198	0.046	0.057
50%	11,965	11,262	182	793	2,520	0.037	862	0.144	2.531	1.234	0.628	1.213	0.041	1.492	0.293	0.058	0.184
90%	14,723	13,707	246	997	2,932	0.041	1,075	0.243	6.411	1.769	1.161	3.014	0.101	3.908	0.433	0.073	0.471
NNA NG Station LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										0.828					0.176		
50%										1.192					0.265		
90%										1.699					0.400		
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																	
10%	15,018	12,933	354	1,203	1,664	0.049	1,257	0.130	0.877	1.461	0.899	1.229	0.013	0.400	0.320	0.025	0.209
50%	17,568	15,167	413	1,410	1,945	0.053	1,471	0.178	2.651	2.488	2.028	4.048	0.038	1.503	0.504	0.036	0.663
90%	20,547	17,768	483	1,658	2,280	0.057	1,727	0.274	6.533	3.676	3.477	9.695	0.098	3.911	0.727	0.049	1.581
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																	
10%										1.435					0.299		
50%										2.447					0.475		
90%										3.553					0.689		



TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>	
Electrolysis CA Electricity LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																		
10%	13,024	9,895	73	764	1,462	0.043	810	0.093	0.831	0.902	0.390	0.492	0.014	0.414	0.228	0.023	0.064	
50%	15,153	11,556	94	892	1,707	0.046	945	0.145	2,598	1,350	0.840	1.625	0.040	1.515	0.340	0.029	0.247	
90%	17,717	13,543	124	1,046	1,996	0.049	1,105	0.241	6,459	1,924	1,422	3,894	0.100	3,915	0.509	0.039	0.609	
Electrolysis CA Electricity LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																		
10%									0.861						0.209			
50%									1,310						0.312			
90%									1,845						0.477			
Electrolysis NGCC Electricity LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard)																		
10%	13,054	13,048	17	782	2,198	0.047	846	0.114	1,096	0.377	0.062	0.055	0.027	0.546	0.122	0.028	0.003	
50%	15,558	15,552	58	933	2,616	0.051	1,009	0.196	2,885	0.555	0.076	0.156	0.059	1,645	0.190	0.034	0.005	
90%	18,573	18,566	115	1,126	3,144	0.056	1,214	0.305	6,716	0.840	0.096	0.328	0.119	4,031	0.326	0.044	0.009	
Electrolysis NGCC Electricity LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard)																		
10%									0.346						0.101			
50%									0.518						0.162			
90%									0.802						0.285			
LS Diesel DI CI HEV																		
10%	4,197	4,184	3,816	324	0.375	0.017	338	0.063	1,331	0.219	0.044	0.069	0.032	0.810	0.081	0.017	0.021	
50%	4,602	4,587	4,172	359	0.410	0.017	373	0.124	3,905	0.309	0.062	0.093	0.070	2,413	0.135	0.021	0.031	
90%	4,958	4,940	4,451	392	0.439	0.017	407	0.253	9,101	0.504	0.084	0.134	0.151	5,645	0.255	0.030	0.045	
NNA NG FT Diesel DI CI HEV																		
10%	5,839	5,837	61	362	0.622	0.016	382	0.079	1,412	0.286	0.069	0.072	0.025	0.827	0.052	0.014	0.004	
50%	6,457	6,454	79	398	0.691	0.017	419	0.141	4,037	0.395	0.088	0.115	0.061	2,455	0.106	0.018	0.005	
90%	7,027	7,023	102	430	0.754	0.017	452	0.269	9,406	0.599	0.108	0.185	0.140	5,797	0.225	0.028	0.006	

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
5-ppm S Gasoline FP FCV																	
10%	4,057	4,043	3,631	314	0.363	0.015	328	0.160	0.567	0.191	0.047	0.071	0.094	0.337	0.065	0.017	0.023
50%	4,519	4,503	4,035	350	0.423	0.015	364	0.233	2,415	0.271	0.066	0.096	0.141	1,487	0.112	0.021	0.032
90%	5,067	5,050	4,515	390	0.470	0.015	405	0.350	6,068	0.447	0.069	0.139	0.216	3,762	0.219	0.030	0.046
Crude Naphtha FP FCV																	
10%	3,743	3,733	3,482	273	0.358	0.015	286	0.156	0.546	0.160	0.039	0.054	0.093	0.319	0.028	0.014	0.002
50%	4,174	4,162	3,861	307	0.395	0.015	320	0.233	2,333	0.243	0.053	0.075	0.142	1,428	0.074	0.018	0.003
90%	4,702	4,687	4,333	347	0.440	0.015	362	0.345	6,213	0.419	0.072	0.110	0.213	3,842	0.185	0.027	0.006
NNA NG FT Naphtha FP FCV																	
10%	5,464	5,462	61	327	0.606	0.014	346	0.176	0.591	0.236	0.067	0.067	0.087	0.318	0.030	0.014	0.004
50%	6,169	6,166	79	366	0.681	0.015	386	0.252	2,334	0.343	0.085	0.107	0.135	1,395	0.078	0.018	0.004
90%	6,965	6,961	103	410	0.769	0.015	432	0.369	6,208	0.525	0.105	0.175	0.208	3,803	0.189	0.027	0.005
NNA NG MeOH FP FCV																	
10%	4,751	4,749	104	285	0.529	0.015	302	0.149	0.640	0.317	0.066	0.080	0.070	0.340	0.036	0.014	0.005
50%	5,289	5,285	123	322	0.591	0.016	340	0.224	2,362	0.426	0.082	0.115	0.118	1,410	0.084	0.019	0.006
90%	5,942	5,938	146	364	0.660	0.016	384	0.340	6,061	0.614	0.102	0.172	0.189	3,713	0.195	0.028	0.007
Corn EtOH FP FCV																	
10%	5,658	2,325	255	174	0.366	0.150	236	0.219	0.706	0.489	0.168	0.175	0.087	0.319	0.034	0.015	0.006
50%	6,313	2,648	298	198	0.436	0.216	273	0.299	2,477	0.614	0.241	0.279	0.136	1,420	0.082	0.019	0.018
90%	7,079	3,017	369	227	0.495	0.296	315	0.421	6,262	0.808	0.335	0.435	0.209	3,757	0.194	0.028	0.042
Cellulosic EtOH FP FCV																	
10%	7,272	118	253	-54	0.040	0.092	-17	0.236	0.853	0.539	0.057	-0.120	0.088	0.320	0.029	0.014	-0.025
50%	8,661	219	307	-32	0.051	0.125	6	0.312	2,612	0.673	0.092	-0.030	0.137	1,420	0.076	0.018	-0.008
90%	10,501	337	372	-13	0.064	0.168	31	0.429	6,391	0.873	0.127	0.015	0.209	3,757	0.190	0.027	-0.001

**TABLE D-1 (Cont.)**

	Total Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
<b>5-ppm S Gasoline FP FC HEV</b>																
10%	3,416	3,403	3,057	0.328	0.015	277	0.151	0.570	0.170	0.044	0.060	0.089	0.344	0.059	0.017	0.019
50%	3,896	3,883	3,479	0.369	0.015	315	0.221	2.442	0.249	0.061	0.083	0.134	1.504	0.106	0.021	0.027
90%	4,439	4,424	3,958	0.417	0.015	356	0.333	6.079	0.425	0.082	0.121	0.206	3.770	0.213	0.030	0.040
<b>Crude Naphtha FP FC HEV</b>																
10%	3,158	3,151	2,934	0.307	0.015	242	0.147	0.547	0.142	0.037	0.046	0.088	0.322	0.028	0.014	0.002
50%	3,599	3,588	3,336	0.345	0.015	277	0.220	2.337	0.224	0.050	0.065	0.134	1.437	0.074	0.018	0.003
90%	4,126	4,115	3,800	0.390	0.015	317	0.327	6.075	0.404	0.068	0.096	0.203	3.759	0.185	0.027	0.005
<b>NNA NG FT Naphtha FP FC HEV</b>																
10%	4,619	4,618	52	0.517	0.014	292	0.162	0.585	0.208	0.061	0.058	0.082	0.322	0.028	0.014	0.003
50%	5,320	5,318	68	0.591	0.014	334	0.236	2.383	0.310	0.078	0.092	0.128	1.437	0.075	0.018	0.004
90%	6,128	6,125	90	0.676	0.015	381	0.344	6.115	0.495	0.097	0.150	0.196	3.759	0.187	0.027	0.005
<b>NNA NG MeOH FP FC HEV</b>																
10%	4,085	4,083	89	0.460	0.015	261	0.142	0.631	0.279	0.050	0.068	0.070	0.345	0.034	0.014	0.004
50%	4,555	4,551	105	0.513	0.015	294	0.213	2.411	0.381	0.075	0.099	0.113	1.449	0.081	0.018	0.005
90%	5,119	5,115	126	0.575	0.016	332	0.321	6.220	0.563	0.093	0.149	0.181	3.820	0.190	0.027	0.006
<b>Cellulosic EtOH FP FC HEV</b>																
10%	6,159	101	215	0.039	0.081	-14	0.216	0.807	0.468	0.053	-0.104	0.084	0.320	0.029	0.014	-0.025
50%	7,450	189	263	0.049	0.110	6	0.289	2.566	0.596	0.083	-0.026	0.130	1.420	0.076	0.018	-0.008
90%	9,134	292	325	0.059	0.147	27	0.400	6.348	0.791	0.115	0.013	0.199	3.757	0.190	0.027	-0.001
<b>NA NG Central GH<sub>2</sub> FCV</b>																
10%	3,574	3,511	30	0.378	0.001	230	0.011	0.038	0.156	0.073	0.050	0.001	0.007	0.025	0.017	0.007
50%	3,950	3,880	39	0.420	0.002	256	0.015	0.057	0.206	0.107	0.137	0.002	0.010	0.034	0.019	0.021
90%	4,343	4,270	52	0.463	0.002	284	0.021	0.081	0.266	0.151	0.308	0.002	0.014	0.044	0.021	0.048

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
NNA NG Central GH <sub>2</sub> FCV																	
10%	3,996	3,929	49	249	0.727	0.002	267	0.022	0.063	0.286	0.076	0.100	0.001	0.007	0.031	0.017	0.009
50%	4,407	4,333	61	277	0.803	0.002	296	0.033	0.083	0.352	0.111	0.199	0.002	0.011	0.039	0.020	0.023
90%	4,845	4,768	77	306	0.886	0.003	328	0.047	0.112	0.430	0.156	0.377	0.003	0.015	0.049	0.021	0.051
NA NG Station GH <sub>2</sub> FCV																	
10%	3,634	3,572	14	226	0.758	0.001	244	0.018	0.042	0.123	0.074	0.064	0.003	0.015	0.037	0.027	0.006
50%	4,121	4,052	25	258	0.862	0.002	278	0.028	0.065	0.174	0.108	0.157	0.005	0.027	0.053	0.033	0.020
90%	4,690	4,613	39	295	0.982	0.002	318	0.041	0.100	0.235	0.150	0.330	0.007	0.043	0.076	0.040	0.047
NNA NG Station GH <sub>2</sub> FCV																	
10%	4,054	3,992	35	251	1.109	0.002	277	0.024	0.065	0.252	0.077	0.098	0.003	0.015	0.040	0.027	0.008
50%	4,587	4,515	48	286	1.262	0.002	316	0.036	0.091	0.321	0.112	0.198	0.005	0.027	0.057	0.033	0.022
90%	5,231	5,145	65	328	1,439	0.003	361	0.051	0.129	0.406	0.156	0.379	0.007	0.044	0.080	0.040	0.050
Electrolysis U.S. Electricity GH <sub>2</sub> FCV																	
10%	7,341	6,324	173	586	0.810	0.010	608	0.050	0.101	0.589	0.424	0.563	0.002	0.021	0.103	0.015	0.095
50%	8,210	7,091	194	659	0.909	0.012	683	0.058	0.168	1.074	0.957	1.940	0.003	0.033	0.182	0.020	0.318
90%	9,192	7,955	216	743	1,020	0.013	770	0.067	0.238	1.581	1.591	4.661	0.004	0.047	0.266	0.025	0.753
Electrolysis CA Electricity GH <sub>2</sub> FCV																	
10%	6,337	4,820	34	371	0.709	0.007	390	0.031	0.092	0.340	0.186	0.227	0.002	0.023	0.070	0.015	0.030
50%	7,094	5,407	44	418	0.797	0.008	438	0.042	0.135	0.545	0.399	0.778	0.004	0.036	0.107	0.017	0.118
90%	7,896	6,039	56	469	0.894	0.009	492	0.054	0.192	0.769	0.652	1.869	0.006	0.057	0.158	0.019	0.293
Electrolysis NGCC Electricity GH <sub>2</sub> FCV																	
10%	6,305	6,300	8	378	1.055	0.009	406	0.037	0.123	0.121	0.035	0.027	0.005	0.038	0.030	0.017	0.002
50%	7,269	7,266	28	437	1.223	0.011	489	0.064	0.241	0.178	0.040	0.074	0.012	0.085	0.038	0.019	0.003
90%	8,413	8,411	54	509	1,416	0.012	544	0.096	0.455	0.281	0.047	0.156	0.021	0.176	0.068	0.021	0.004

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis Renewable Electricity GH <sub>2</sub> FCV																	
10%	3,266	0	0	0	0.000	0.000	0	0.000	0.000	0.000	0.019	0.000	0.000	0.000	0.000	0.012	0.000
50%	3,642	0	0	0	0.000	0.000	0	0.000	0.000	0.000	0.019	0.000	0.000	0.000	0.000	0.012	0.000
90%	4,072	0	0	0	0.000	0.000	0	0.000	0.000	0.000	0.019	0.000	0.000	0.000	0.000	0.012	0.000
NA NG Central LH <sub>2</sub> FCV																	
10%	4,863	4,860	23	296	0.457	0.003	308	0.017	0.038	0.193	0.046	0.021	0.001	0.003	0.017	0.014	0.002
50%	5,406	5,403	38	331	0.507	0.004	344	0.033	0.059	0.333	0.055	0.057	0.002	0.005	0.030	0.015	0.003
90%	6,020	6,017	57	372	0.561	0.004	386	0.051	0.093	0.527	0.064	0.116	0.003	0.007	0.048	0.016	0.006
NNA NG Central LH <sub>2</sub> FCV																	
10%	5,041	5,038	40	310	0.479	0.003	322	0.020	0.047	0.315	0.048	0.046	0.000	0.001	0.012	0.012	0.003
50%	5,609	5,607	56	348	0.532	0.004	361	0.036	0.069	0.465	0.058	0.083	0.001	0.001	0.013	0.012	0.004
90%	6,233	6,229	76	390	0.589	0.005	404	0.055	0.106	0.665	0.068	0.144	0.001	0.001	0.015	0.012	0.005
NNA NG Station LH <sub>2</sub> FCV																	
10%	5,537	5,255	59	371	0.982	0.004	395	0.033	0.079	0.301	0.186	0.236	0.004	0.024	0.072	0.029	0.034
50%	6,811	6,393	88	464	1.150	0.005	492	0.047	0.119	0.503	0.388	0.713	0.006	0.038	0.110	0.036	0.112
90%	8,308	7,716	124	579	1.344	0.007	612	0.064	0.174	0.798	0.698	1.826	0.008	0.057	0.162	0.043	0.290
NNA NG Station LH <sub>2</sub> FCV																	
10%	6,097	5,793	82	396	1.348	0.004	428	0.039	0.102	0.436	0.187	0.264	0.004	0.024	0.074	0.029	0.035
50%	7,414	6,985	113	492	1.561	0.006	529	0.055	0.145	0.647	0.389	0.748	0.006	0.038	0.113	0.036	0.114
90%	9,088	8,471	152	615	1.800	0.008	657	0.075	0.202	0.964	0.723	1.863	0.008	0.056	0.167	0.043	0.293
Electrolysis U.S. Electricity LH <sub>2</sub> FCV																	
10%	9,387	8,098	221	750	1.037	0.013	778	0.064	0.134	0.803	0.559	0.750	0.003	0.028	0.139	0.017	0.128
50%	10,921	9,438	256	878	1.206	0.015	910	0.077	0.224	1.433	1.255	2.509	0.004	0.045	0.242	0.022	0.412
90%	12,664	10,963	298	1,024	1.400	0.018	1,061	0.092	0.323	2.146	2.150	6.016	0.006	0.064	0.360	0.029	0.977

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis CA Electricity LH <sub>2</sub> FCV																	
10%	8,128	6,188	45	477	0.908	0.009	500	0.041	0.122	0.458	0.241	0.308	0.003	0.031	0.093	0.016	0.040
50%	9,409	7,179	58	555	1.057	0.011	582	0.056	0.180	0.724	0.521	1.008	0.005	0.048	0.142	0.018	0.153
90%	10,911	8,343	77	645	1.227	0.013	677	0.073	0.261	1.050	0.878	2.401	0.008	0.077	0.215	0.021	0.377
Electrolysis NGCC Electricity LH <sub>2</sub> FCV																	
10%	8,153	8,150	10	488	1.368	0.012	524	0.046	0.158	0.153	0.040	0.035	0.006	0.050	0.038	0.019	0.002
50%	9,646	9,643	36	580	1.621	0.014	621	0.084	0.317	0.230	0.047	0.097	0.015	0.113	0.049	0.021	0.003
90%	11,441	11,436	71	692	1.928	0.017	741	0.127	0.624	0.366	0.056	0.205	0.028	0.243	0.088	0.024	0.005
NA NG Central GH <sub>2</sub> FC HEV																	
10%	3,251	3,194	27	201	0.344	0.001	209	0.010	0.035	0.145	0.068	0.046	0.001	0.006	0.023	0.017	0.006
50%	3,574	3,510	36	223	0.380	0.001	232	0.014	0.051	0.188	0.099	0.122	0.002	0.009	0.031	0.019	0.018
90%	3,923	3,853	47	246	0.418	0.002	256	0.019	0.073	0.242	0.139	0.277	0.002	0.012	0.040	0.020	0.044
NINA NG Central GH <sub>2</sub> FC HEV																	
10%	3,621	3,558	45	225	0.656	0.002	240	0.019	0.057	0.259	0.070	0.092	0.001	0.007	0.028	0.017	0.008
50%	3,978	3,912	55	250	0.724	0.002	287	0.030	0.075	0.317	0.102	0.178	0.002	0.010	0.035	0.019	0.020
90%	4,385	4,311	69	277	0.801	0.002	296	0.042	0.100	0.392	0.144	0.339	0.002	0.013	0.044	0.020	0.046
NA NG Station GH <sub>2</sub> FC HEV																	
10%	3,281	3,228	14	203	0.683	0.001	219	0.016	0.039	0.113	0.068	0.060	0.003	0.013	0.033	0.025	0.006
50%	3,722	3,658	23	232	0.774	0.001	250	0.026	0.059	0.158	0.100	0.140	0.004	0.024	0.048	0.031	0.018
90%	4,251	4,178	35	267	0.887	0.002	288	0.038	0.091	0.213	0.140	0.296	0.006	0.039	0.068	0.037	0.043
NINA NG Station GH <sub>2</sub> FC HEV																	
10%	3,667	3,609	32	227	1.006	0.002	251	0.022	0.059	0.227	0.071	0.089	0.003	0.014	0.036	0.025	0.007
50%	4,153	4,088	43	258	1.140	0.002	285	0.033	0.082	0.291	0.103	0.175	0.004	0.024	0.051	0.031	0.020
90%	4,749	4,673	58	298	1.307	0.002	328	0.047	0.116	0.372	0.146	0.338	0.006	0.039	0.073	0.037	0.045

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis U.S. Electricity GH <sub>2</sub> FC HEV																	
10%	6,808	5,694	165	527	0.730	0.009	547	0.045	0.091	0.533	0.389	0.509	0.002	0.019	0.094	0.015	0.087
50%	7,411	6,401	175	594	0.819	0.010	616	0.052	0.151	0.974	0.865	1.738	0.003	0.030	0.164	0.019	0.285
90%	8,365	7,242	197	676	0.927	0.012	701	0.061	0.215	1.432	1.465	4.218	0.004	0.043	0.240	0.023	0.683
Electrolysis CA Electricity GH <sub>2</sub> FC HEV																	
10%	5,736	4,361	31	335	0.641	0.007	352	0.028	0.064	0.305	0.175	0.207	0.002	0.021	0.062	0.015	0.029
50%	6,397	4,883	39	377	0.720	0.007	396	0.038	0.123	0.494	0.357	0.710	0.003	0.033	0.097	0.016	0.108
90%	7,190	5,501	51	426	0.813	0.008	447	0.049	0.174	0.703	0.597	1.713	0.005	0.051	0.146	0.018	0.269
Electrolysis NGCC Electricity GH <sub>2</sub> FC HEV																	
10%	5,707	5,704	7	342	0.958	0.008	367	0.033	0.111	0.108	0.034	0.025	0.004	0.035	0.027	0.017	0.001
50%	6,571	6,568	25	398	1.106	0.010	424	0.058	0.216	0.162	0.038	0.065	0.011	0.077	0.034	0.018	0.002
90%	7,602	7,599	49	461	1.278	0.011	494	0.087	0.421	0.251	0.044	0.137	0.019	0.165	0.060	0.020	0.004
NA NG Central LH <sub>2</sub> FC HEV																	
10%	4,403	4,401	21	267	0.414	0.003	277	0.016	0.034	0.177	0.043	0.020	0.001	0.003	0.015	0.014	0.001
50%	4,881	4,878	34	299	0.458	0.003	311	0.030	0.054	0.304	0.052	0.050	0.002	0.004	0.027	0.015	0.003
90%	5,441	5,438	52	335	0.507	0.004	348	0.046	0.084	0.476	0.059	0.104	0.002	0.008	0.044	0.015	0.005
NNA NG Central LH <sub>2</sub> FC HEV																	
10%	4,578	4,576	36	281	0.435	0.003	292	0.018	0.043	0.287	0.045	0.043	0.000	0.001	0.011	0.012	0.003
50%	5,068	5,065	51	314	0.481	0.004	326	0.033	0.062	0.422	0.054	0.074	0.000	0.001	0.012	0.012	0.003
90%	5,633	5,629	69	352	0.532	0.004	366	0.050	0.095	0.601	0.063	0.130	0.001	0.001	0.013	0.012	0.004
NA NG Station LH <sub>2</sub> FC HEV																	
10%	4,994	4,739	54	334	0.887	0.003	356	0.030	0.072	0.267	0.169	0.216	0.003	0.021	0.065	0.027	0.031
50%	6,155	5,774	80	419	1.039	0.005	444	0.043	0.108	0.450	0.353	0.657	0.005	0.034	0.099	0.034	0.103
90%	7,526	6,978	112	524	1.219	0.006	553	0.059	0.157	0.717	0.637	1.646	0.007	0.051	0.146	0.040	0.261

TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
NNA NG Station LH <sub>2</sub> FC HEV																	
10%	5,512	5,237	74	357	1,218	0.004	387	0.035	0.092	0.394	0.170	0.238	0.003	0.022	0.067	0.027	0.032
50%	6,703	6,308	102	445	1,408	0.005	479	0.050	0.131	0.582	0.352	0.690	0.005	0.034	0.102	0.034	0.105
90%	8,221	7,655	137	556	1,632	0.007	595	0.068	0.183	0.860	0.651	1.728	0.007	0.051	0.150	0.040	0.272
Electrolysis U.S. Electricity LH <sub>2</sub> FC HEV																	
10%	8,497	7,327	200	678	0.937	0.012	704	0.058	0.121	0.709	0.494	0.663	0.003	0.025	0.122	0.016	0.116
50%	9,852	8,516	232	790	1.069	0.014	819	0.070	0.201	1.277	1.145	2.330	0.004	0.040	0.215	0.021	0.381
90%	11,405	9,888	270	923	1.263	0.016	957	0.083	0.289	1.932	1.945	5.536	0.005	0.057	0.323	0.027	0.895
Electrolysis CA Electricity LH <sub>2</sub> FC HEV																	
10%	7,357	5,591	41	431	0.822	0.009	452	0.038	0.111	0.416	0.216	0.268	0.003	0.028	0.085	0.016	0.035
50%	8,509	6,489	53	501	0.954	0.010	526	0.051	0.164	0.653	0.468	0.945	0.005	0.044	0.129	0.018	0.143
90%	9,904	7,577	70	586	1.119	0.012	615	0.066	0.235	0.946	0.788	2.325	0.007	0.069	0.196	0.020	0.366
Electrolysis NGCC Electricity LH <sub>2</sub> FC HEV																	
10%	7,374	7,372	9	442	1,234	0.011	474	0.043	0.145	0.142	0.039	0.032	0.005	0.046	0.035	0.018	0.002
50%	8,708	8,703	33	524	1,463	0.013	561	0.076	0.287	0.212	0.044	0.085	0.014	0.102	0.045	0.020	0.003
90%	10,339	10,334	65	625	1,741	0.015	669	0.116	0.566	0.336	0.053	0.184	0.026	0.221	0.081	0.023	0.005
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%	14,603	12,593	344	1,167	1,616	0.048	1,219	0.122	0.885	0.574	0.835	0.602	0.013	0.412	0.161	0.025	0.107
50%	16,258	14,047	382	1,305	1,802	0.051	1,361	0.168	2.656	1.212	1.914	2.302	0.037	1.508	0.301	0.035	0.380
90%	18,149	15,736	428	1,465	2,014	0.054	1,527	0.258	6.440	2.808	3.164	5.995	0.094	3.862	0.573	0.047	0.972
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%										0.545							0.141
50%										1.199							0.281
90%										2.832							0.555



TABLE D-1 (Cont.)

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI CD (Bin 5 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%	18,762	16,173	441	1,500	2,076	0.054	1,565	0.156	0.992	0.714	1.094	0.788	0.015	0.433	0.191	0.027	0.142
50%	21,575	18,632	508	1,726	2,386	0.058	1,799	0.207	2.770	1.547	2.525	3.028	0.039	1.528	0.365	0.040	0.507
90%	24,914	21,555	588	2,009	2,762	0.063	2,091	0.299	6.540	3.677	4.186	7.974	0.096	3.892	0.713	0.055	1.297
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI CD (Bin 2 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%										0.683					0.172		
50%										1.562					0.343		
90%										3.763					0.705		
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%	11,660	10,052	273	929	1,294	0.044	972	0.102	0.763	0.500	0.690	0.487	0.011	0.383	0.145	0.023	0.086
50%	13,217	11,419	311	1,060	1,468	0.047	1,107	0.147	2.557	1.023	1.563	1.851	0.038	1.470	0.272	0.032	0.307
90%	14,978	12,964	352	1,207	1,662	0.049	1,259	0.236	6.325	2.323	2.583	4.830	0.093	3.842	0.501	0.043	0.790
Electrolysis U.S. Electricity GH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%										0.464					0.122		
50%										1.015					0.247		
90%										2.351					0.474		
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI HEV (Bin 5 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%	15,007	12,942	352	1,197	1,662	0.049	1,251	0.130	0.869	0.614	0.898	0.639	0.013	0.400	0.168	0.025	0.114
50%	17,507	15,119	413	1,403	1,939	0.053	1,463	0.179	2.654	1.293	2.056	2.464	0.039	1.490	0.321	0.037	0.411
90%	20,504	17,711	484	1,651	2,271	0.057	1,721	0.268	6.426	3.029	3.425	6.419	0.095	3.859	0.607	0.050	1.049
Electrolysis U.S. Electricity LH <sub>2</sub> DOD SI HEV (Bin 2 NO <sub>x</sub> Standard, Proposed IAQR)																	
10%										0.580					0.146		
50%										1.291					0.298		
90%										3.066					0.598		

**TABLE D-1 (Cont.)**

	Total Energy	Fossil Energy	Petroleum	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	GHGs	TVOC	TCO	TNO <sub>x</sub>	TPM <sub>10</sub>	TSO <sub>x</sub>	UVOC	UCO	UNO <sub>x</sub>	UPM <sub>10</sub>	USO <sub>x</sub>
Electrolysis U.S. Electricity GH <sub>2</sub> FCV (Proposed IAQR)																	
10%	7,265	6,264	171	581	0.803	0.010	602	0.050	0.102	0.207	0.426	0.302	0.002	0.022	0.039	0.015	0.054
50%	8,197	7,080	193	658	0.907	0.012	682	0.058	0.167	0.517	0.968	1.159	0.003	0.033	0.092	0.020	0.191
90%	9,223	7,988	217	745	1.020	0.013	772	0.068	0.238	1.315	1.597	3.006	0.004	0.047	0.221	0.024	0.486
Electrolysis U.S. Electricity LH <sub>2</sub> FCV (Proposed IAQR)																	
10%	9,399	8,094	220	750	1.036	0.013	778	0.064	0.134	0.271	0.554	0.396	0.003	0.028	0.052	0.017	0.072
50%	10,879	9,391	256	872	1.201	0.015	904	0.077	0.221	0.692	1.276	1.531	0.004	0.044	0.123	0.022	0.254
90%	12,635	10,932	298	1,017	1.394	0.018	1,054	0.093	0.321	1.766	2.120	3.999	0.006	0.064	0.297	0.029	0.652
Electrolysis U.S. Electricity GH <sub>2</sub> FC HEV (Proposed IAQR)																	
10%	6,633	5,713	156	530	0.733	0.009	549	0.045	0.091	0.193	0.385	0.280	0.002	0.019	0.037	0.015	0.050
50%	7,425	6,415	175	596	0.821	0.010	618	0.053	0.151	0.483	0.866	1.089	0.003	0.030	0.086	0.019	0.181
90%	8,342	7,217	196	672	0.923	0.012	697	0.061	0.214	1.245	1.437	2.697	0.004	0.043	0.208	0.023	0.438
Electrolysis U.S. Electricity LH <sub>2</sub> FC HEV (Proposed IAQR)																	
10%	6,484	7,316	200	680	0.936	0.012	705	0.058	0.119	0.257	0.504	0.371	0.002	0.025	0.049	0.016	0.066
50%	9,635	8,495	231	788	1.087	0.014	817	0.069	0.200	0.637	1.138	1.451	0.004	0.040	0.113	0.021	0.242
90%	11,453	9,912	269	922	1.265	0.016	956	0.083	0.288	1.638	1.920	3.560	0.005	0.058	0.275	0.027	0.581

CC  
CC  
CC