

NBS 12 78-1350



**TECHNICAL ASSOCIATION OF THE
PULP AND PAPER INDUSTRY**

**COLLABORATIVE REFERENCE PROGRAM
FOR PAPER**

REPORT NO. 54G



**U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards**

NBS COLLABORATIVE REFERENCE PROGRAMS

TAPPI Paper and Board (6 times per year)

Bursting strength	Smoothness
Tearing strength	Surface pick strength
Tensile breaking strength	K & N ink absorption
Elongation to break	pH
Tensile energy absorption	Opacity
Folding endurance	Blue reflectance (brightness)
Stiffness	Specular gloss, 75°
Air resistance	Thickness
Grammage	Concora (flat crush)
	Ring crush

FKBG-API Containerboard (48 times per year)

Mullen burst of linerboard
Concora test of medium

MCCA Color and Appearance (4 times per year)

Gloss at 60°
Color and color difference
Retroreflectivity

Rubber (4 times per year)

Tensile strength, ultimate elongation and tensile stress
Hardness
Mooney viscosity
Vulcanization properties

ASTM Textiles (3 times per year)

Flammability (FF3-71 and FF5-74)

ASTM Cement (2 times per year)

Chemical (11 chemical components)
Physical (8 characteristics)

AASHTO Bituminous

Asphalt cement (2 times per year)
Cutbacks (once a year)



Collaborative Reference Programs
B360 Polymer Building
National Bureau of Standards
Washington, D.C. 20234

TECHNICAL ASSOCIATION OF THE
PULP AND PAPER INDUSTRY

COLLABORATIVE REFERENCE PROGRAM
FOR PAPER

Report No. 54G

R. G. Powell
TAPPI-NBS Research Associate
Collaborative Testing Services, Inc.

E. B. Randall, Jr., J. Horlick
Office of Testing Laboratory Evaluation Technology
Office of Engineering Standards
National Engineering Laboratory

NBSIR 78-1350

U. S. DEPARTMENT OF COMMERCE
National Bureau of Standards

INTRODUCTION

Reports 54S and 54G comprise the last set of reports for the 77-78 program year. Participants in tests which involve strength properties of paper will receive only the S report; those in tests which measure other properties will receive only the G report.

Please note that some changes have been made in the computer-generated plots. These changes should aid participants in familiarizing themselves with the International System of Units (SI) as it applies to TAPPI test methods. Wherever possible, Grand Means in SI units have been added at the top of the plots, and scales in SI units have been added to the axes allowing the reader to compare means and variability in common units and SI units for the same data. On all plots, sample codes and unit of test have been shifted to new positions.

Notes and comments for individual laboratories and "Best Values" applicable to a particular method are given following Table 1 for each method. See page 4 of this report for an explanation of "Best Values". Please do not confuse these best values with provisional values included with the samples to detect serious discrepancies at the time of test. NBS results, identified as L502 in the optical tests are included in some of the tables.

If there are any questions on the notes, the analyses, or the reports in general, contact Robert G. Powell, Jeffrey Horlick, or Edwin B. Randall, Jr. on 301/921-2946.



Jeffrey Horlick, Administrator
NBS-TAPPI Collaborative Reference Program
Office of Testing Laboratory Evaluation Technology

September 22, 1978

TAPPI-NBS COLLABORATIVE REFERENCE PROGRAM

BACKGROUND AND PURPOSE

In 1969, the National Bureau of Standards and the Technical Association of the Pulp and Paper Industry established a collaborative reference program to provide a participating laboratory with a means to check periodically the level and uniformity of its testing in comparison with that of other laboratories.

The interchange of paper and board products and of the raw materials for these products requires agreement among raw material suppliers, paper and board producers, converters, distributors, retailers, commercial testing laboratories, user organizations and the ultimate consumer as to the meaning of test results, an agreement that cannot be achieved without accurate and precise testing. This program is designed to help assure agreement.

HOW THE PROGRAM WORKS

Participants Select the Tests in which they wish to participate. This choice is made on joining the program, but additional tests may be added at any time. Also new participants may enter the program at any time.

Test Samples are Distributed Bimonthly; i.e. every 2 months.

Provisional Values are Provided with the Samples for one or both of the test levels, depending on method. The provisional values permit serious discrepancies to be detected without delay. (It is left to the discretion of the laboratory supervisor as to whether these values should be known to the operator.)

Each Participant Tests the Samples, following instructions provided for each test method. The full check on a single instrument should normally take no more than 30 minutes. The test results are then sent to NBS for analysis. The participant is also asked to report other information relevant to an accurate analysis, such as test conditions and the instruments used.

Industry Means, Best Values and Other Statistics are developed from the data by NBS. The best values are estimates based on a careful examination of all data, both current and past, with special attention to results obtained by the National Bureau of Standards and other recognized reference laboratories in this and other countries.

A Quick Report is Prepared for each participating laboratory reporting data on time. This report shows the industry mean values, and the deviations of the laboratory's results from these values for each test method.

A Longer Summary Report, Showing the Data from all Participants, is also prepared. In the summary report, of which this report is an example, each laboratory is identified by a code number so that the information is maintained on a confidential basis. However, instruments are identified by type so participants can compare their results with those obtained on similar instruments of different manufacture. This report includes test averages, best values and standard deviations for individual participants and for the group as a whole. A participant should be able to readily determine the level and variability of his results in comparison with those of the other laboratories.

Repeatability and Reproducibility Statements such as Contained in ASTM, TAPPI and ISO Standards are included at the end of the report. Participants can check their performance level against the precision statement given in the test method or specification.

TABLE OF CONTENTS

Analyses In This Report

PAGE

i	Introduction
ii	Description of Program
iv	Metric Conversion Table
i	Key to Tables and Graphs
5	40-1 Air Resistance, Gurley 011 type
8	40-2 Air Resistance, Sheffield type
ii	41-1 Air Resistance, Gurley Mercury type
13	44-1 Smoothness, Parker Printsurf
14	45-1 Smoothness, Sheffield type
19	45-2 Smoothness, Bekk type
20	47-1 Smoothness, Bendtsen type
21	56-1 K & N Ink Absorption
22	57-1 pH, Cold Extraction
23	57-2 pH, Hot Extraction
24	60-1 Opacity, White (89%) Backing
29	60-2 Opacity, Paper Backing, B & L type
30	60-3 Opacity, Paper Backing, Elrepho type
31	65-1 Blue Reflectance (Brightness), Directional
34	65-2 Blue Reflectance, Diffuse, Elrepho (Gloss Trap)
36	65-3 Blue Reflectance, Diffuse, Elrepho (No Gloss Trap)
38	75-1 Specular Gloss, 75 degree
41	90-1 Thickness (Caliper)
46	95-1 Grammage (Basis Weight)
49	Summary

Analyses In The S Report

10-1	Bursting Strength - Up to 45 psi
10-2	Bursting Strength - Up to 45 psi, Air Clamps
11-1	Bursting Strength - Up to 100 psi
15-1	Tearing Strength - Deep Cutout
17-1	Tearing Strength - No Cutout
19-1	Tensile Breaking Strength - Packaging Papers
20-1	Tensile Breaking Strength - Printing Papers, CRE
20-2	Tensile Breaking Strength - Printing Papers, Pendulum
25-1	Tensile Energy Absorption - Packaging Papers
26-1	Tensile Energy Absorption - Printing Papers
28-1	Elongation to Break - Packaging Papers
29-1	Elongation to Break - Printing Papers
30-1	Folding Endurance, MIT type
30-2	Folding Endurance, MIT type, log (base 10)
35-1	Stiffness, Gurley
36-1	Stiffness, Taber
49-1	Surface Pick Strength, IGT
50-1	Surface Pick Strength, Wax
91-1	Concora (Flat Crush)
96-1	Ring Crush

TABLE OF CONVERSION FACTORS TO METRIC (SI) UNITS

<u>Physical Quantity</u>	<u>To Convert From</u>	<u>To</u>	<u>Multiply by</u>
Bursting strength	psi	kPa	6.895
	kg/cm ²	kPa	98.07
	bar	kPa	100.00
Tearing strength	g	mN	9.807
Tensile strength	lb/in.	kN/m	.1751
	lb/0.5 in.	kN/m	.3502
	lb/15 mm	kN/m	.2965
	kg/15 mm	kN/m	.6538
	kg/25 mm	kN/m	.3923
	kg/mm	kN/m	9.807
Tensile energy absorption	ft-lb/ft ²	J/m ²	14.59
	in.-lb/in. ²	J/m ²	175.1
	kg-m/m ²	J/m ²	9.807
Bending stiffness	g·cm	μN·m	98.07
Flat-crush strength (Concora)	lb	N	4.448
Ring-crush (TAPPI)	lb	N	4.448
	(ISO) lb/6.00 in.	kN/m	0.0292
Thickness	mil	μm	25.40

KEY TO TABLES AND GRAPHS

- MEAN - The average of individual TEST DETERMINATIONS. The number of TEST DETERMINATIONS in the mean is given in the upper right corner of the first table (TEST D.) and again at the bottom of this table.
- GRAND MEAN - (GR. MEAN) The average of the individual laboratory MEANS, excluding laboratories flagged (see column F) with an X, #, or +. The GRAND MEAN is given in US customary units and, where applicable, in SI metric units.
- SD OF MEANS - (SD MEANS) The standard deviation of the laboratory MEANS about the GRAND MEAN; an index of the among-laboratory precision.
- DEV - The deviation or difference of the laboratory MEAN from the GRAND MEAN.
- N. DEV - The normal deviate or ratio of the DEV to the SD OF MEANS; an indication of the degree of divergence of the laboratory MEAN from the GRAND MEAN. A N. DEV of more than 2 or less than -2 may indicate that the participant is not following the procedure considered standard for this analysis.
- SDR - The standard deviation of repeated measurements; that is, of individual test determinations about their MEAN.
- AVERAGE SDR - The average of the individual laboratory SDR's; an index of the within-laboratory precision of repeated measurements.
- R. SDR - The relative standard deviation of repeated measurements; that is, the ratio of the SDR to the AVERAGE SDR; an indication of the ability of a participant to repeat his measurements relative to the average ability. The greater the number of TEST DETERMINATIONS the closer the R. SDR should be to unity. If R. SDR is outside the limits given below, the participant may not be following the procedure considered standard for this analysis:

<u>No. of test Determinations</u>	<u>Lower limit for R. SDR</u>	<u>Upper limit for R. SDR</u>
3	0.09	2.58
5	0.27	2.06
8	0.40	1.77
10	0.46	1.67
15	0.56	1.53
20	0.61	1.45
25	0.65	1.39

- VAR - Code for instrument type or variation in condition, see second table.
- F - Flag, with following meaning:
- + - Excluded from grand means because VAR non-standard for this analysis.
- # - Excluded because data were not understood or because of a non-coded variation reported by the laboratory. (See NOTES following Table 1 for each method).
- M - Excluded because data for one sample are missing.
- X - Excluded because plotted point would fall outside of the 99% error ellipse, (see below for explanation of Graph).
- * - Included in grand means but plotted point falls outside of the 95% error ellipse. The participants should take this as a warning to reexamine his testing procedure.
- S - Included in grand mean but only after omission of one or more 'wild' values; that is, test determinations more than 3 times AVERAGE SDR from the laboratory's MEAN. Not more than 20% of the test determination may be excluded in this manner without rejecting the laboratory.
- O - Included in grand mean and inside 95% error ellipse.
- COORDINATES - Distances along major and minor axes of error ellipse. If special additive or concurrent model of the measuring process applies to this method, the distance along the minor axis represents the random error within a laboratory while that along the major axis also includes a systematic laboratory component of error.

95% ELLIPSE -

Lengths of the major and minor axes of the ellipse and the angle that the major axis makes with the horizontal axis.

AVG R. SDR -

Average of the R. SDR for the two samples; an indication of the laboratory's precision of repeated measurements.

Graph -

For each laboratory the MEAN for the second sample is plotted against the MEAN for the first sample, with each point representing a laboratory. The horizontal and vertical lines are the GRAND MEANS. The dashed line is drawn at 45°. The solid sloping line, which may or may not lie close to the 45° line, is along the major axis of the error ellipse. The ellipse is drawn so that, on the average, it will include 95% of the points representing the laboratories.

Plotted symbols are as explained above (under F), except that an 'S' is plotted as an 'O'. A participant whose plotted point falls outside of the ellipse should carefully reexamine the testing procedure he is following.

The graph is plotted with an ellipse when there are 20 or more laboratories in the analysis. When there are 10 through 19 laboratories in the analysis the graph is plotted but the ellipse is omitted. When there are fewer than 10 laboratories retained in the analysis the graph is not plotted.

The International System of Units (SI) is used on the plots wherever possible to aid participants in familiarizing themselves with SI. Grand means in SI units are given at the top of the plot, and supplementary scales in SI units are drawn along the axes allowing the reader to compare means and variability in common units and SI units for the same data.

Summary - In addition to several quantities already defined
(At end of above, the summary shows the following values for
report) each test method:

REPL CRP - The number of replicate test determinations used
in this Collaborative Reference Program.

REPL TAPPI - The number of replicate test determinations in a
test result required by the applicable TAPPI
Standard or assumed here if there is no TAPPI
Standard. This quantity is needed in the compu-
tation of TAPPI repeatability and reproducibility
from the SD OF MEANS and the AVER SDR. See TAPPI
Standard T1206 for definitions and computations.

REPEAT - TAPPI repeatability, a measure of the within-
laboratory precision of a test result.

REPROD - TAPPI reproducibility, a measure of the between-
laboratory precision of a test result.

Best values - Given at the end of Table 1 for each method
for which sufficient information is available.
These best values are estimates based on a
careful examination of all data, both current
and past, with special attention to results
obtained by the National Bureau of Standards
and other recognized reference laboratories
in this and other countries. All participants
using equipment that is standard for the
analysis should be able to achieve results
within the plus-minus (+) limits, when these
are shown along with the best values.

ANALYSIS T40-1 TABLE 1
 AIR RESISTANCE, GURLEY UNITS (SECONDS/100 CC)
 TAPPI STANDARD T460 GS-75, AIR RESISTANCE OF PAPER

LAB CODE	SAMPLE J47 106 GRAMS PER SQUARE METER PRINTING					SAMPLE E73 76 GRAMS PER SQUARE METER HEAT SET OFFSET BOOK					TEST D. = 10		
	MEAN	DEV	N.DEV	SDR	R.SDR	MEAN	DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L107	29.5	-.5	-.47	1.3	.87	17.6	.1	.08	1.7	1.11	40D	Ø	L107
L121	29.7	-.3	-.32	1.4	.97	18.7	1.2	1.06	1.6	1.04	40D	Ø	L121
L122	30.3	.2	.23	1.5	1.06	17.6	.1	.12	1.0	.64	40D	Ø	L122
L123	29.6	-.4	-.42	1.3	.89	16.8	-.7	-.65	1.5	1.02	40D	Ø	L123
L124G	27.7	-2.3	-2.17	1.6	1.10	15.8	-1.7	-1.55	1.6	1.07	40D	Ø	L124G
L125	30.9	.8	.81	1.7	1.18	16.9	-.6	-.55	1.1	.75	40D	Ø	L125
L127	29.8	-.2	-.20	1.4	.64	17.3	-.2	-.21	1.1	.75	40D	Ø	L127
L128	30.8	.8	.73	1.5	1.01	19.5	2.0	1.78	1.1	.71	40D	Ø	L128
L141	30.7	.7	.64	1.5	1.02	17.9	.4	.32	1.8	1.21	40D	Ø	L141
L148	30.8	.8	.73	1.3	.88	18.7	1.1	1.03	1.7	1.13	40D	Ø	L148
L153	29.6	-.4	-.41	2.2	1.48	15.6	-1.9	-1.74	1.0	.68	40D	Ø	L153
L158	28.7	-1.3	-1.27	2.2	1.47	18.3	.8	.71	1.3	.83	40D	Ø	L158
L159	31.3	1.3	1.22	2.6	1.74	18.3	.7	.67	1.6	1.03	40D	Ø	L159
L163	30.7	.7	.63	1.2	.79	19.8	2.3	2.06	1.7	1.09	40D	Ø	L163
L166	31.5	1.5	1.41	1.8	1.25	16.4	-1.1	-1.02	1.9	1.25	40D	Ø	L166
L174	30.6	.6	.54	1.8	1.21	16.4	-1.1	-1.01	1.8	1.19	40D	Ø	L174
L176	34.4	4.4	4.15	1.3	.86	19.6	2.1	1.90	2.3	1.54	40D	#	L176
L182G	28.8	-1.2	-1.17	1.8	1.19	16.8	-.7	-.64	1.9	1.23	40D	Ø	L182G
L190C	30.8	.8	.73	1.5	1.06	18.9	1.3	1.21	2.2	1.43	40D	Ø	L190C
L190R	29.2	-.8	-.79	1.1	.77	17.3	-.2	-.15	1.7	1.10	40D	Ø	L190R
L223	31.8	1.8	1.73	1.2	.83	18.3	.8	.74	.9	.60	40D	Ø	L223
L224	29.0	-1.0	-.96	1.5	1.05	15.4	-2.1	-1.85	2.5	1.66	40D	Ø	L224
L230G	30.7	.7	.64	1.1	.72	17.3	-.2	-.19	1.3	.83	40D	Ø	L230G
L238A	30.5	.5	.45	2.0	1.37	17.4	-.1	-.10	.8	.53	40D	Ø	L238A
L241	27.6	-2.4	-2.31	1.4	.97	16.1	-1.4	-1.26	1.4	.96	40D	Ø	L241
L243G	28.8	-1.2	-1.17	1.1	.77	17.6	.1	.10	1.7	1.11	40D	Ø	L243G
L259	27.4	-2.7	-2.54	2.4	1.61	18.0	.5	.43	1.6	1.08	40D	*	L259
L261	29.7	-.3	-.31	1.8	1.20	17.0	-.5	-.43	1.0	.67	40D	Ø	L261
L262G	29.9	-.1	-.10	1.2	.80	18.0	.5	.46	.8	.54	40D	Ø	L262G
L265	29.8	-.3	-.26	1.3	.87	17.1	-.4	-.32	1.9	1.27	40D	Ø	L265
L278	30.9	.8	.81	1.1	.72	17.5	.0	.03	1.8	1.17	40D	Ø	L278
L285	31.4	1.3	1.27	1.0	.69	17.7	.2	.14	2.0	1.31	40D	Ø	L285
L301	29.1	-.9	-.90	2.3	1.54	17.3	-.2	-.16	1.6	1.08	40D	Ø	L301
L308	31.9	1.9	1.78	1.2	.82	18.2	.7	.64	1.4	.96	40D	Ø	L308
L312	29.7	-.3	-.32	2.0	1.37	17.1	-.4	-.37	1.2	.79	40D	Ø	L312
L321	30.6	.6	.54	2.7	1.82	15.2	-2.3	-2.07	2.1	1.42	40D	Ø	L321
L324	29.2	-.8	-.76	1.4	.95	17.9	.3	.31	1.4	.96	40D	Ø	L324
L326	30.8	.8	.73	.9	.63	18.5	1.0	.91	1.1	.72	40D	Ø	L326
L328	30.0	-.0	-.01	.8	.52	17.5	.0	.02	.6	.40	40D	Ø	L328
L341	31.4	1.3	1.28	1.2	.79	19.2	1.6	1.48	1.2	.78	40D	Ø	L341
L344	29.2	-.8	-.75	1.2	.79	17.5	-.0	-.01	1.9	1.24	40D	Ø	L344
L376	31.2	1.2	1.15	1.5	1.03	18.8	1.3	1.20	1.9	1.25	40D	Ø	L376
L380	30.0	-.0	-.03	.8	.56	19.6	2.1	1.87	.8	.55	40D	Ø	L380
L396M	29.1	-.9	-.84	1.5	1.02	15.1	-2.4	-2.16	1.5	1.00	40D	Ø	L396M
L561	29.1	-.9	-.89	1.4	.93	17.4	-.1	-.10	1.4	.95	40D	Ø	L561
L567	29.9	-.1	-.13	1.2	.82	17.2	-.3	-.28	1.4	.93	40D	Ø	L567
L576	29.5	-.5	-.47	1.0	.68	17.7	.2	.21	1.6	1.06	40D	Ø	L576
L599	30.0	.0	.01	1.4	.97	16.8	-.7	-.59	1.8	1.22	40D	Ø	L599
L604	29.8	-.2	-.18	1.8	1.20	15.7	-1.8	-1.60	1.7	1.15	40D	Ø	L604
L616	31.1	1.0	.98	.6	.41	17.9	.4	.34	2.4	1.61	40D	Ø	L616
L676	31.2	1.2	1.13	1.9	1.28	18.7	1.2	1.09	1.6	1.04	40D	Ø	L676

GR. MEAN = 30.0 GURLEY UNITS GRAND MEAN = 17.5 GURLEY UNITS TEST DETERMINATIONS = 10
 SD MEANS = 1.1 GURLEY UNITS SD OF MEANS = 1.1 GURLEY UNITS 50 LABS IN GRAND MEANS
 AVERAGE SDR = 1.5 GURLEY UNITS AVERAGE SDR = 1.5 GURLEY UNITS

L115	27.4	-2.6	-2.50	1.2	.80	15.6	-1.9	-1.71	1.5	1.00	40U	*	L115
L236	30.5	.5	.49	1.5	1.01	18.2	.7	.65	1.5	1.00	40E	*	L236
L291	30.2	.2	.16	1.5	1.06	19.1	1.6	1.42	2.1	1.41	40U	*	L291
L484	28.5	-1.6	-1.48	1.0	.65	16.7	-.8	-.75	1.1	.74	40H	*	L484

TOTAL NUMBER OF LABORATORIES REPORTING = 55

Best values: J47 29.5 ± 1.8 Gurley units
 E73 17.5 ± 1.9 Gurley units


The following laboratories were omitted from the grand means because of extreme test results: 176

ANALYSIS T40-1 TABLE 2
 AIR RESISTANCE, GURLEY UNITS (SECONDS/100 CC)
 TAPPI STANDARD T460 CS=75, AIR RESISTANCE OF PAPER

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY	TEST INSTRUMENT	CONDITIONS
		J47	E73	MAJOR	MINOR	R.SDR	VAR			
L259	*	27.4	18.0	-1.4	2.3	1.34	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L115	*	27.4	15.6	-3.2	.8	.90	40U	AIR RESISTANCE,	SHEPFIELD IN GURLEY UNITS	
L241	Ø	27.6	16.1	-2.7	.9	.97	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L124G	Ø	27.7	15.8	-2.8	.6	1.08	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L484	*	28.5	16.7	-1.6	.6	.70	40H	AIR RESISTANCE,	REGMED-TYPE GURLEY DENSOMETER	=OIL FLOTATION
L158	Ø	28.7	18.3	-.3	1.5	1.15	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L243G	Ø	28.8	17.6	-.7	1.0	.94	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L182G	Ø	28.8	16.8	-1.3	.5	1.21	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L224	Ø	29.0	15.4	-2.2	-.6	1.35	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L301	Ø	29.1	17.3	-.7	.6	1.31	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L561	Ø	29.1	17.4	-.7	.6	.94	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L396M	Ø	29.1	15.1	-2.4	-.9	1.01	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L190R	Ø	29.2	17.3	-.7	.5	.93	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L324	Ø	29.2	17.9	-.3	.8	.95	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L344	Ø	29.2	17.5	-.5	.6	1.01	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L576	Ø	29.5	17.7	-.1	.5	.87	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L107	Ø	29.5	17.6	-.3	.4	.99	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L123	Ø	29.6	16.8	-.8	-.1	.96	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L153	Ø	29.6	15.6	-1.8	-.9	1.08	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L121	Ø	29.7	18.7	.7	1.0	1.00	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L312	Ø	29.7	17.1	-.5	-.0	1.08	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L261	Ø	29.7	17.0	-.6	-.1	.94	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L265	Ø	29.8	17.1	-.5	-.0	1.07	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L127	Ø	29.8	17.3	-.3	.0	.85	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L604	Ø	29.8	15.7	-1.5	-1.0	1.17	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L567	Ø	29.9	17.2	-.3	-.1	.87	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L262G	Ø	29.9	18.0	.3	.4	.67	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L380	Ø	30.0	19.6	1.6	1.4	.56	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L328	Ø	30.0	17.5	.0	.0	.46	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L599	Ø	30.0	16.8	-.5	-.4	1.09	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L291	*	30.2	19.1	1.3	.9	1.23	40U	AIR RESISTANCE,	SHEPFIELD IN GURLEY UNITS	
L122	Ø	30.3	17.6	.3	-.1	.85	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L238A	Ø	30.5	17.4	.2	-.4	.95	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L236	*	30.5	18.2	.9	.1	1.00	40E	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION, 20C,65%RH
L174	Ø	30.6	16.4	-.5	-1.2	1.20	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L321	Ø	30.6	15.2	-1.4	-1.9	1.62	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L163	Ø	30.7	19.8	2.2	1.0	.94	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L230G	Ø	30.7	17.3	.3	-.6	.78	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L141	Ø	30.7	17.9	.7	-.3	1.11	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L148	Ø	30.8	18.7	1.4	.2	1.00	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L128	Ø	30.8	19.5	2.0	.7	.86	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L326	Ø	30.8	18.5	1.3	.1	.67	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L190C	Ø	30.8	18.9	1.5	.3	1.24	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L278	Ø	30.9	17.5	.6	-.6	.94	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L125	Ø	30.9	16.9	.1	-1.0	.97	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L616	Ø	31.1	17.9	1.0	-.5	1.01	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L676	Ø	31.2	18.7	1.7	-.1	1.16	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L376	Ø	31.2	18.8	1.8	-.0	1.14	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L159	Ø	31.3	18.3	1.4	-.5	1.39	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L285	Ø	31.4	17.7	1.0	-.9	1.00	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L341	Ø	31.4	19.2	2.1	.0	.79	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L166	Ø	31.5	16.4	.1	-1.9	1.25	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L223	Ø	31.8	18.3	1.8	-.8	.71	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L308	Ø	31.9	18.2	1.8	-1.0	.89	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
L176	#	34.4	19.6	4.5	-1.9	1.20	40D	AIR RESISTANCE,	GURLEY DENSOMETER	= OIL FLOTATION
GMEANS:		30.0	17.5			1.00				
		95% ELLIPSE:		3.3	2.1			WITH GAMMA = 49 DEGREES		

AIR RESISTANCE, GURLEY

SAMPLE J47 = 30.0 GURLEY UNITS SAMPLE E73 = 17.5 GURLEY UNITS

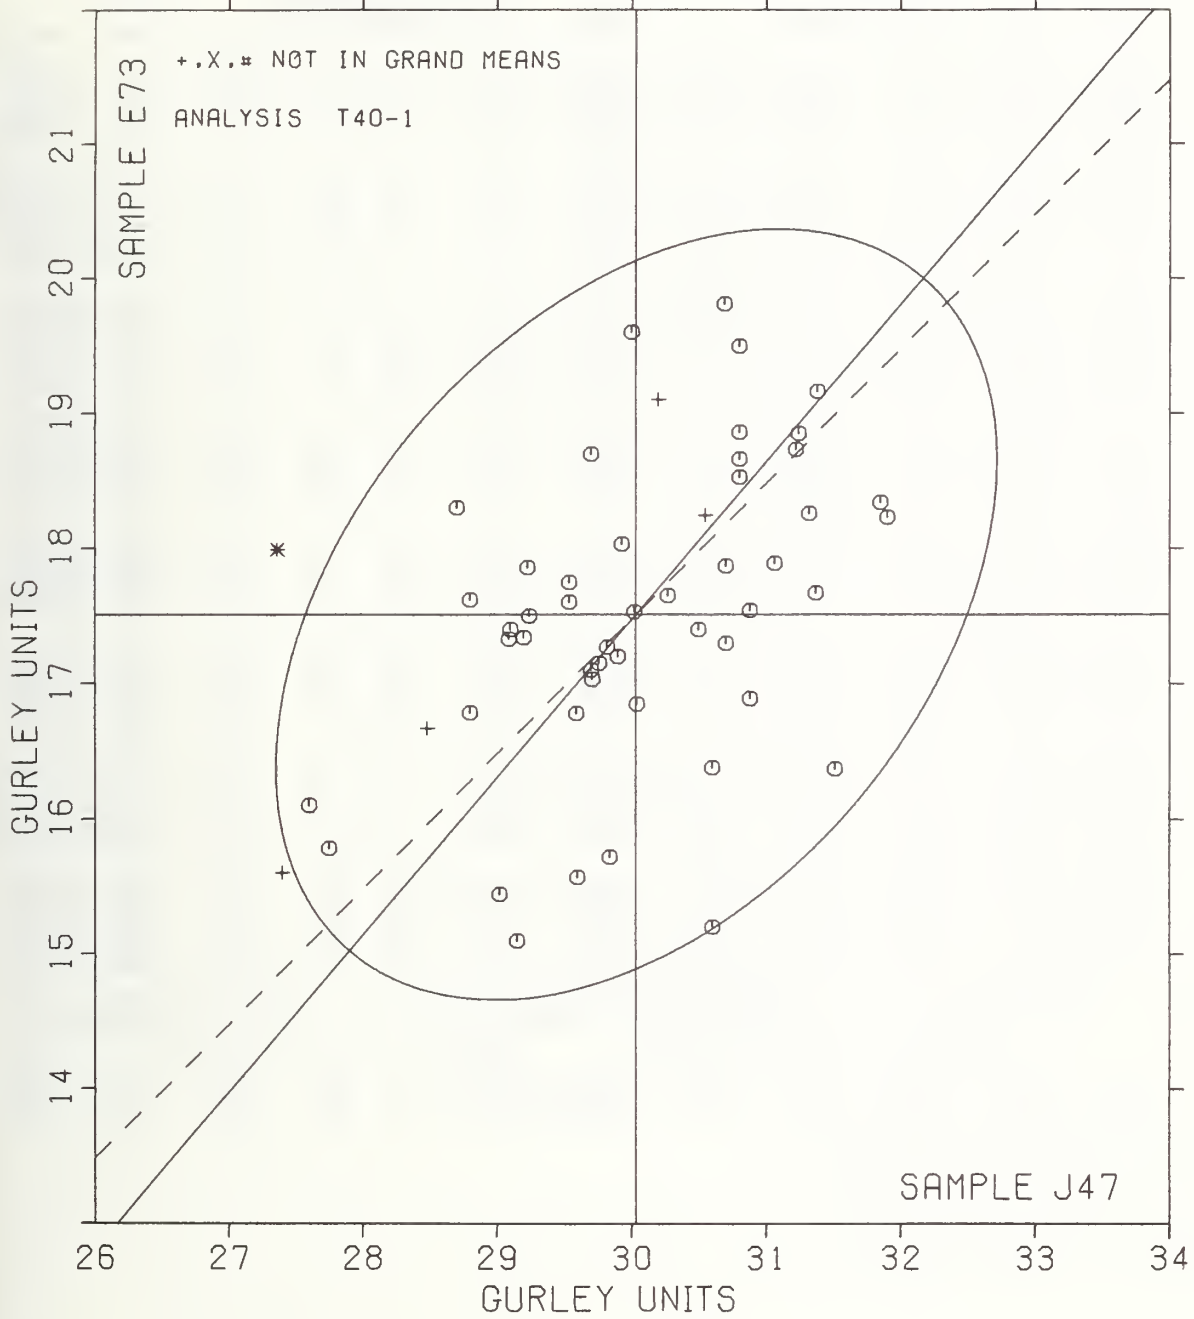

ANALYSIS T40-2 TABLE 1
 AIR RESISTANCE, SHEFFIELD UNITS (CC/MIN) FOR 0.442 SQ. IN (3/4 IN. DIA) ORIFICE
 SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

LAB CODE	SAMPLE J47 MEAN	PRINTING 106 GRAMS PER SQUARE METER				SAMPLE E73 MEAN	HEAT SET OFFSET BOOK 76 GRAMS PER SQUARE METER				TEST D. - 10		
		DEV	N. DEV	SDR	R. SDR		DEV	N. DEV	SDR	R. SDR	VAR	F	LAB
L114	110.5	4.2	.90	3.7	.92	166.8	8.9	1.25	15.2	1.38	40S	0	L114
L121	104.3	-2.0	-.43	4.1	1.04	160.8	2.9	.41	15.3	1.38	40S	0	L121
L122S	109.1	2.8	.60	5.6	1.43	156.2	-1.7	-.24	11.3	1.02	40S	0	L122S
L124S	103.1	-3.2	-.69	6.1	1.54	151.6	-6.3	-.89	14.3	1.29	40S	0	L124S
L127	108.5	2.2	.47	2.9	.74	152.2	-5.7	-.81	8.9	.80	40S	0	L127
L132	104.4	-1.9	-.41	3.8	.95	158.7	.8	.11	10.2	.92	40S	0	L132
L148	110.0	3.7	.79	3.5	.87	159.8	1.9	.26	13.9	1.25	40S	0	L148
L157	107.4	1.1	.23	2.8	.71	152.2	-5.7	-.81	12.1	1.09	40S	0	L157
L158	100.0	-6.3	-1.35	3.3	.84	151.0	-6.9	-.98	9.9	.90	40S	0	L158
L173B	104.0	-2.3	-.49	2.1	.53	158.0	.1	.01	11.4	1.02	40S	0	L173B
L190C	105.3	-1.0	-.22	4.1	1.02	156.0	-1.9	-.27	13.9	1.26	40S	0	L190C
L213	115.7	9.4	2.01	2.2	.55	165.8	7.9	1.11	7.8	.70	40S	0	L213
L223	99.6	-6.7	-1.43	3.7	.92	161.6	3.7	.52	17.6	1.59	40S	0	L223
L228	131.1	24.8	5.30	5.9	1.48	191.4	33.5	4.72	12.8	1.15	40S	#	L228
L230S	99.7	-6.6	-1.41	3.1	.78	147.2	-10.7	-1.51	14.7	1.33	40S	0	L230S
L233	105.6	.7	-.15	4.6	1.16	155.0	-2.9	-.41	9.3	.84	40S	0	L233
L241	115.0	8.7	1.86	4.7	1.19	164.0	6.1	.86	12.2	1.10	40S	0	L241
L249	99.6	-6.7	-1.43	3.4	.87	152.8	-5.1	-.72	16.4	1.48	40S	0	L249
L255	107.7	1.4	.30	3.9	1.00	161.9	4.0	.56	11.1	1.00	40S	0	L255
L257A	110.9	4.6	.98	3.5	.89	157.5	-4	-.06	9.7	.88	40S	0	L257A
L257B	108.2	1.9	.40	5.5	1.40	163.7	5.8	.81	9.8	.89	40S	0	L257B
L257C	110.9	4.6	.98	3.3	.84	159.3	1.4	.19	7.3	.66	40S	0	L257C
L260	109.1	2.8	.60	4.7	1.20	165.3	7.4	1.04	7.9	.72	40S	0	L260
L262S	101.5	-4.8	-1.03	3.6	.91	140.4	-17.5	-2.47	6.6	.60	40S	0	L262S
L288	113.8	7.5	1.60	6.4	1.61	169.4	11.5	1.62	10.2	.92	40S	0	L288
L301	114.1	7.8	1.67	7.0	1.77	172.1	14.2	2.00	11.5	1.04	40S	0	L301
L305	110.2	3.9	.83	3.5	.89	159.0	1.1	.15	5.2	.47	40S	0	L305
L312	101.4	-4.9	-1.05	2.4	.61	159.8	1.9	.26	6.4	.58	40S	0	L312
L318	101.8	-4.5	-.96	4.7	1.18	155.8	-2.1	-.30	11.1	1.00	40S	0	L318
L349	101.9	-4.4	-.94	3.9	.99	152.6	-5.3	-.75	9.2	.83	40S	0	L349
L352	104.7	-1.6	-.34	3.6	.90	151.5	-6.0	-.85	10.0	.90	40S	0	L352
L354	109.2	2.9	.62	4.2	1.07	151.6	-6.3	-.89	7.6	.68	40S	0	L354
L360	105.3	-1.0	-.22	2.5	.62	147.7	-10.2	-1.44	12.5	1.12	40S	0	L360
L370	102.7	-3.6	-.77	4.4	1.12	160.8	2.9	.41	8.6	.77	40S	0	L370
L390	101.3	-5.0	-1.07	5.3	1.35	152.9	-5.0	-.71	13.2	1.19	40S	0	L390
L562	293.0	186.7	39.90	17.7	4.46	338.0	180.1	25.39	29.7	2.68	40S	#	L562
L575	106.9	.6	.13	3.1	.78	169.4	11.5	1.62	15.4	1.39	40S	0	L575
L587	109.9	3.6	.77	4.6	1.15	164.3	6.4	.90	13.4	1.21	40S	0	L587
L597	108.0	1.7	.36	2.7	.68	167.5	9.6	1.35	13.6	1.22	40S	0	L597
L626	98.4	-7.9	-1.69	3.8	.97	148.6	-9.3	-1.31	6.6	.60	40S	0	L626

GR. MEAN = 106.3 SHEFF. UNITS GRAND MEAN = 157.9 SHEFF. UNITS TEST DETERMINATIONS = 10
 SD MEANS = 4.7 SHEFF. UNITS SD OF MEANS = 7.1 SHEFF. UNITS 38 LABS IN GRAND MEANS
 AVERAGE SDR = 4.0 SHEFF. UNITS AVERAGE SDR = 11.1 SHEFF. UNITS

L182B	413.5	307.2	65.65	19.0	4.80	727.5	569.6	80.29	41.6	3.75	40B	*	L182B
L243B	453.6	347.3	74.22	11.9	3.00	814.9	657.0	92.61	74.7	6.74	40B	*	L243B
L484	407.5	301.2	64.37	10.3	2.61	684.0	526.1	74.16	28.8	2.59	40B	*	L484

TOTAL NUMBER OF LABORATORIES REPORTING = 43

Best values: J47 107 ± 7 Sheffield units
 E73 157 ± 11 Sheffield units


The following laboratories were omitted from the grand means because of extreme test results:
 228, 562

AIR RESISTANCE, SHEFFIELD UNITS (CC/MIN) FOR 0.442 SQ. IN (3/4 IN. DIA) ORIFICE
SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

LAB CODE	P	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		J47	E73	MAJOR	MINOR	R.SDR	VAR	
L626	Ø	98.4	148.6	-11.9	2.6	.78	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L249	Ø	99.6	152.8	-7.7	3.5	1.18	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L223	Ø	99.6	161.6	.1	7.6	1.26	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L230S	Ø	99.7	147.2	-12.6	.8	1.05	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L158	Ø	100.0	151.0	-9.1	2.3	.87	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L390	Ø	101.3	152.9	-6.8	2.1	1.27	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L312	Ø	101.4	159.8	-6.6	5.2	.59	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L262S	Ø	101.5	140.4	-17.7	-4.0	.75	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L318	Ø	101.8	155.8	-4.0	3.0	1.09	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L349	Ø	101.9	152.6	-6.8	1.4	.91	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L370	Ø	102.7	160.8	.9	4.5	.95	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L124S	Ø	103.1	151.6	-7.1	-1.1	1.42	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L173B	Ø	104.0	158.0	-1.0	2.1	.78	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L121	Ø	104.3	160.8	1.6	3.1	1.21	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L132	Ø	104.4	158.7	-.2	2.0	.94	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L352	Ø	104.7	151.9	-6.1	-1.4	.90	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L190C	Ø	105.3	156.0	-2.2	-.0	1.14	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L360	Ø	105.3	147.7	-9.5	-3.9	.87	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L233	Ø	105.6	155.0	-2.9	-.7	1.00	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L575	Ø	106.9	169.4	10.4	4.8	1.09	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L157	Ø	107.4	152.2	-4.5	-3.6	.90	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L255	Ø	107.7	161.9	4.2	.6	1.00	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L597	Ø	108.0	167.5	9.3	3.0	.95	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L257B	Ø	108.2	163.7	6.0	1.0	1.14	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L127	Ø	108.5	152.2	-4.0	-4.6	.77	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L260	Ø	109.1	165.3	7.8	1.0	.96	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L122S	Ø	109.1	156.2	-.2	-3.3	1.22	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L354	Ø	109.2	151.6	-4.2	-5.5	.88	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L587	Ø	109.9	164.3	7.3	-.2	1.18	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L148	Ø	110.0	159.8	3.4	-2.4	1.06	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L305	Ø	110.2	159.0	2.8	-2.9	.68	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L114	Ø	110.5	166.8	9.8	.5	1.15	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L257C	Ø	110.9	159.3	3.4	-3.4	.75	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L257A	Ø	110.9	157.5	1.8	-4.3	.88	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L288	Ø	113.8	169.4	13.6	-1.2	1.26	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L301	Ø	114.1	172.1	16.2	-.2	1.40	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L241	Ø	115.0	164.0	9.4	-4.8	1.15	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L213	Ø	115.7	165.8	11.4	-4.6	.62	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L228	#	131.1	191.4	41.2	-6.2	1.32	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L562	#	293.0	338.0	246.5	-80.7	3.57	40S	AIR RESISTANCE, SHEFFIELD (3/4 INCH DIAMETER ORIFICE)
L484	*	407.5	684.0	605.9	-19.8	2.60	40B	AIR RESISTANCE, BENDTSEN, WG 150
L182B	*	413.5	727.5	647.1	-4.8	4.28	40B	AIR RESISTANCE, BENDTSEN, WG 150
L243B	*	453.6	814.9	743.1	.7	4.87	40B	AIR RESISTANCE, BENDTSEN, WG 150
GMEANS:		106.3	157.9			1.00		
		95% ELLIPSE:	20.3	8.5		WITH GAMMA = 62 DEGREES		

AIR RESISTANCE, SHEFFIELD

SAMPLE J47 = 106. SHEFF. UNITS SAMPLE E73 = 158. SHEFF. UNITS

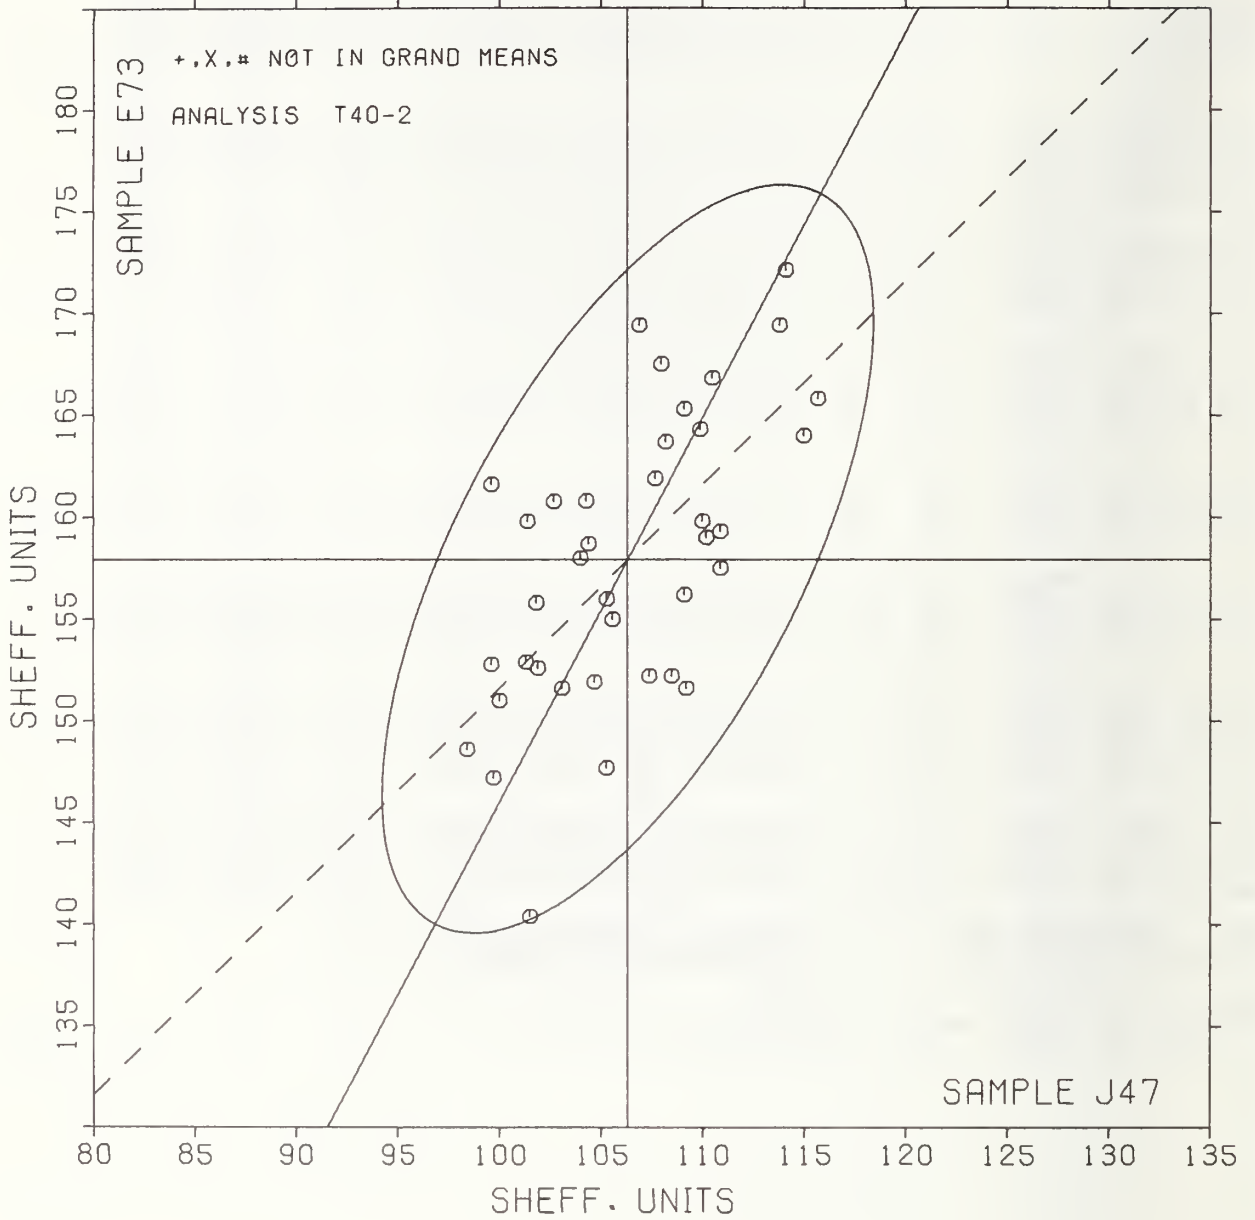

ANALYSIS T41-1 TABLE 1
AIR RESISTANCE, HIGH RANGE, GURLEY MERCURY FLOTATION
DIRECT READING, SEC/10 CC, MERCURY DENSITY

LAB CODE	SAMPLE E37 MEAN	BLEACHED BACKING			R.SDR	SAMPLE B73 MEAN	RELEASE BASE			R.SDR	TEST D. = 10		
		69 GRAMS PER SQUARE METER DEV	N.DEV	SQUARE METER SDR			116 GRAMS PER SQUARE METER DEV	N.DEV	SQUARE METER SDR		VAR	F	LAB
L122	813.	59.	1.51	87.	1.11	1200.	123.	.49	340.	.82	41G	Ø	L122
L128	712.	-43.	-1.11	54.	.68	934.	-144.	-.58	197.	.47	41G	Ø	L128
L166M	759.	4.	.11	69.	.88	1423.	345.	1.39	557.	1.34	41G	Ø	L166M
L195	676.	-79.	-2.03	119.	1.51	872.	-206.	-.83	418.	1.01	41G	Ø	L195
L224	779.	25.	.64	69.	.88	1429.	351.	1.42	791.	1.91	41G	Ø	L224
L230	746.	-8.	-.22	91.	1.16	1348.	271.	1.09	773.	1.86	41G	Ø	L230
L259	17997.	17242.	444.74	1591.	20.23	26442.	25364.	102.33	9479.	22.85	41G	#	L259
L358	778.	23.	.60	62.	.79	1120.	42.	.17	470.	1.13	41G	Ø	L358
L396T	723.	-31.	-.81	84.	1.07	700.	-378.	-1.52	105.	.25	41G	Ø	L396T
L557	762.	7.	.19	69.	.88	1119.	41.	.17	463.	1.12	41G	Ø	L557
L558	747.	-8.	-.20	95.	1.21	1248.	170.	.69	565.	1.36	41G	Ø	L558
L559	813.	58.	1.50	47.	.59	763.	-315.	-1.27	157.	.38	41G	Ø	L559
L561	731.	-24.	-.62	79.	1.00	1036.	-42.	-.17	352.	.85	41G	Ø	L561
L576	771.	17.	.43	98.	1.24	818.	-259.	-1.05	206.	.50	41G	Ø	L576

GR. MEAN = 755. SEC/10 CC GRAND MEAN = 1078. SEC/10 CC TEST DETERMINATIONS = 10
SD MEANS = 39. SEC/10 CC SD OF MEANS = 248. SEC/10 CC 13 LABS IN GRAND MEANS
AVERAGE SDR = 79. SEC/10 CC AVERAGE SDR = 415. SEC/10 CC
TOTAL NUMBER OF LABORATORIES REPORTING = 14

Best values: E37 760 ± 60 second per 10 c c,
B73 1100 ± 330 mercury density
(direct reading)

The values reported here are the time in seconds required for the displacement of 10 ml of air through an area of 1.0 in² of the specimen. The values are not converted to 100 ml of air nor to oil density.

Data from the following laboratories appear to be off by a multiplicative factor: 259

ANALYSIS T41-1 TABLE 2
AIR RESISTANCE, HIGH RANGE, GURLEY MERCURY FLOTATION
DIRECT READING, SEC/10 CC, MERCURY DENSITY


LAB CODE	F	MEANS		COORDINATES		AVG R.SDR	VAR	PROPERTY	TEST INSTRUMENT	CONDITIONS
		E37	B73	MAJOR	MINOR					
L195	Ø	676.	872.	-209.	71.	1.26	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L128	Ø	712.	934.	-145.	37.	.58	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L396T	Ø	723.	700.	-379.	17.	.66	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L561	Ø	731.	1036.	-43.	22.	.92	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L230	Ø	746.	1348.	270.	19.	1.51	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L558	Ø	747.	1248.	170.	14.	1.29	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L166M	Ø	759.	1423.	345.	9.	1.11	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L557	Ø	762.	1119.	42.	-6.	1.00	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L576	Ø	771.	818.	-259.	-27.	.87	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L358	Ø	778.	1120.	43.	-22.	.96	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L224	Ø	779.	1429.	352.	-11.	1.39	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L559	Ø	813.	763.	-313.	-70.	.49	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L122	Ø	813.	1200.	125.	-54.	.97	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	
L259	#	17997.	26442.	26007.	-16257.	21.54	41G	AIR RESISTANCE, HIGH RANGE,	GURLEY MERCURY FLOTATION	

GMEANS: 755. 1078. 1.00
95% ELLIPSE: 731. 111. WITH GAMMA = 87 DEGREES

AIR RESISTANCE, GURLEY HG FLOTATION

SAMPLE E37 = 755. SEC/10 CC

SAMPLE B73 = 1078. SEC/10 CC

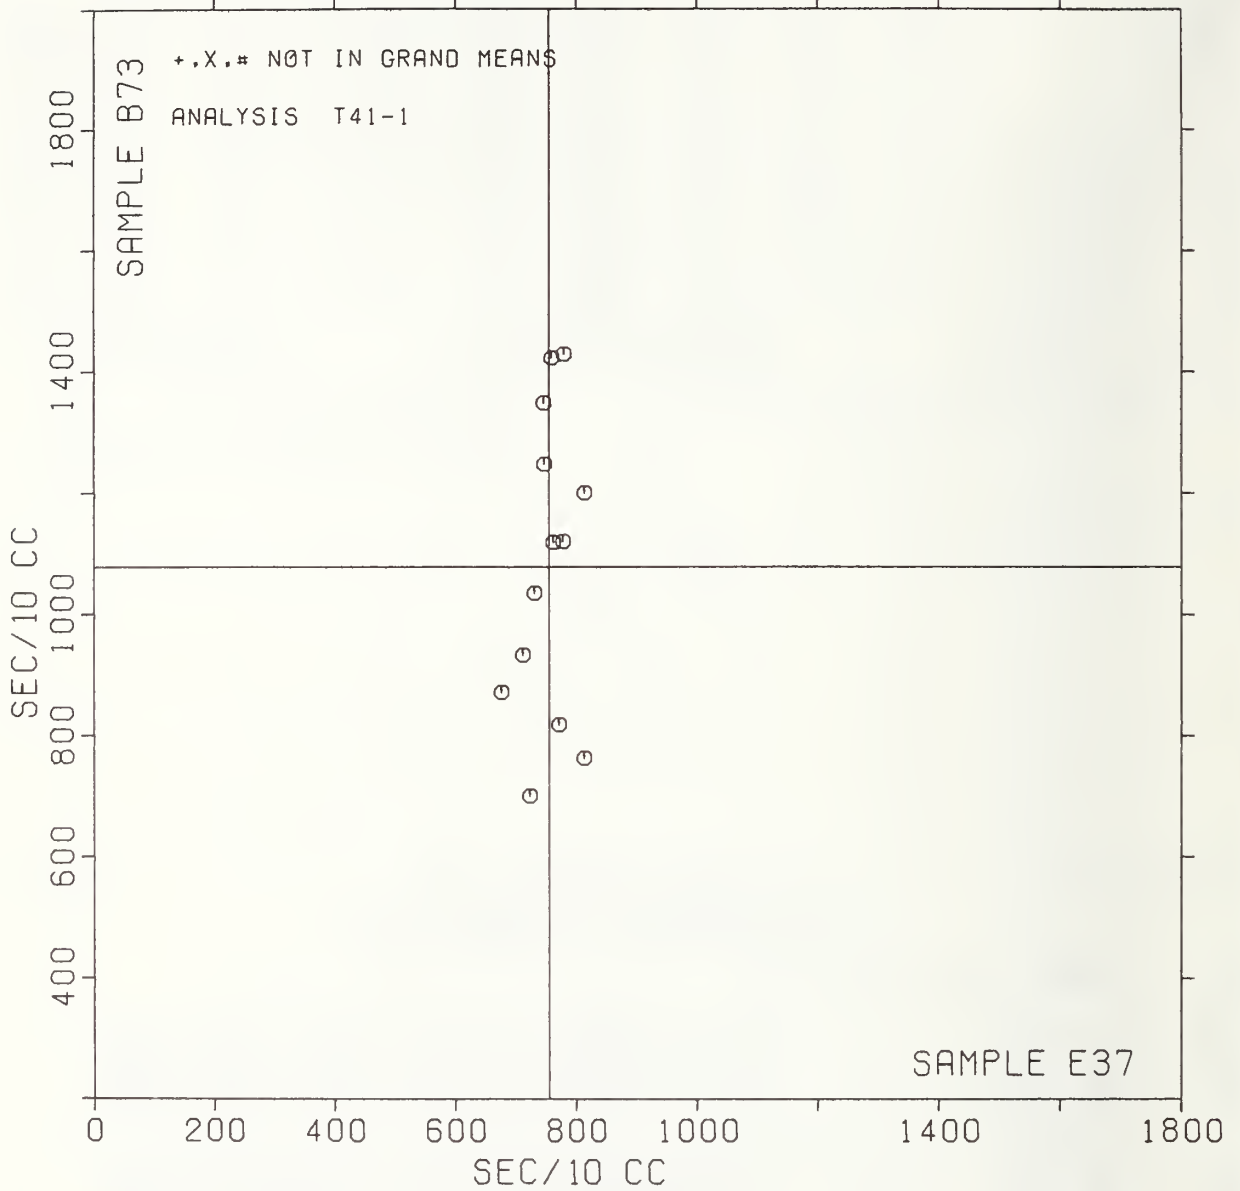

LAB CODE	SAMPLE H45 MEAN	PRINTING 84 GRAMS PER SQUARE METER				R.SDR	SAMPLE J12 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N.DEV	SDR	SDR			DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L122	6.80	.85	1.86	.12	1.12		5.54	.49	1.72	.23	1.01	44P	Ø	L122
L136	5.66	-.29	-.64	.07	.67		4.87	-.18	-.65	.16	.71	44P	Ø	L136
L182	6.12	.17	.38	.11	1.06		5.19	.14	.47	.28	1.20	44P	Ø	L182
L223	5.79	-.16	-.36	.08	.72		4.82	-.24	-.83	.23	1.00	44P	Ø	L223
L288	5.89	-.06	-.14	.14	1.31		5.12	.07	.23	.25	1.10	44P	Ø	L288
L317	6.06	.11	.23	.13	1.21		5.14	.09	.30	.24	1.05	44P	Ø	L317
L588	5.34	-.61	-1.34	.10	.92		4.70	-.35	-1.25	.21	.92	44P	Ø	L588
GR. MEAN = 5.95 MICRONS		GRAND MEAN = 5.05 MICRONS				TEST DETERMINATIONS = 10								
SD MEANS = .46 MICRONS		SD OF MEANS = .28 MICRONS				7 LABS IN GRAND MEANS								
		AVERAGE SDR = .10 MICRONS				AVERAGE SDR = .23 MICRONS								
TOTAL NUMBER OF LABORATORIES REPORTING = 7														

Best values: H45 5.9 microns
J12 5.1 microns

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		H45	J12	MAJOR	MINOR	R.SDR	VAR	
L588	Ø	5.34	4.70	-.71	.02	.92	44P	SMOOTHNESS, PARKER PRINTSURF
L136	Ø	5.66	4.87	-.35	-.00	.69	44P	SMOOTHNESS, PARKER PRINTSURF
L223	Ø	5.79	4.82	-.26	-.12	.86	44P	SMOOTHNESS, PARKER PRINTSURF
L288	Ø	5.89	5.12	-.02	.09	1.20	44P	SMOOTHNESS, PARKER PRINTSURF
L317	Ø	6.06	5.14	.14	.02	1.13	44P	SMOOTHNESS, PARKER PRINTSURF
L182	Ø	6.12	5.19	.22	.03	1.13	44P	SMOOTHNESS, PARKER PRINTSURF
L122	Ø	6.80	5.54	.98	-.03	1.07	44P	SMOOTHNESS, PARKER PRINTSURF
GMEANS:		5.95	5.05			1.00		
		95% ELLIPSE:		2.00	.23	WITH GAMMA = 31 DEGREES		

TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T45-1 TABLE 1
SMOOTHNESS, SHEFFIELD UNITS
SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

LAB CODE	SAMPLE H45 MEAN	PRINTING 84 GRAMS PER SQUARE METER				SAMPLE J12 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. = 15		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L107	275.3	12.4	1.27	13.7	1.51	159.3	16.4	2.46	12.4	1.11	45S	Ø	L107
L108	257.9	-5.0	-0.51	5.3	0.58	154.1	11.2	1.68	10.4	0.94	45S	Ø	L108
L114	270.7	7.8	0.79	9.0	1.00	143.0	0	0.01	14.3	1.29	45S	Ø	L114
L115	252.3	-10.6	-1.08	8.6	0.95	150.7	7.7	1.16	12.1	1.09	45S	Ø	L115
L121	262.0	-0.9	-0.09	11.6	1.28	142.5	-0.5	-0.08	16.9	1.52	45S	Ø	L121
L122	277.7	14.8	1.51	7.5	0.83	138.1	-4.9	-0.74	8.5	0.76	45S	Ø	L122
L123	256.7	-0.2	-0.64	9.2	1.02	138.3	-4.7	-0.71	14.5	1.30	45S	Ø	L123
L124	210.1	-52.8	-5.39	8.5	0.94	131.1	-11.8	-1.78	8.4	0.76	45S	#	L124
L125	263.3	0.4	0.04	17.3	1.91	139.0	-4.0	-0.60	11.1	0.99	45S	Ø	L125
L126	275.0	12.1	1.23	9.6	1.06	142.0	-1.0	-0.15	9.8	0.88	45S	Ø	L126
L128	268.0	5.1	0.52	8.6	0.95	145.3	2.4	0.36	8.3	0.75	45S	Ø	L128
L132	272.7	9.8	1.00	11.2	1.23	144.4	1.4	0.22	13.9	1.25	45S	Ø	L132
L139S	258.3	-4.6	-0.47	8.2	0.90	156.3	13.4	2.01	10.3	0.92	45S	Ø	L139S
L148	266.5	3.6	0.36	6.1	0.67	152.6	9.6	1.45	11.9	1.07	45S	Ø	L148
L152	253.1	-9.8	-1.00	7.0	0.77	148.0	5.0	0.76	11.0	0.99	45S	Ø	L152
L153	284.1	21.2	2.17	5.6	0.61	158.1	15.1	2.27	16.3	1.47	45S	*	L153
L157	272.6	9.7	0.99	13.6	1.51	144.0	1.0	0.16	6.8	0.61	45S	Ø	L157
L158	252.0	-10.9	-1.11	9.8	1.08	134.3	-8.6	-1.30	11.6	1.05	45S	Ø	L158
L159	266.9	4.0	0.40	9.0	0.99	146.1	3.1	0.47	12.5	1.13	45S	Ø	L159
L162	262.3	-0.6	-0.06	4.2	0.46	138.7	-4.3	-0.65	9.5	0.86	45S	Ø	L162
L166	247.9	-15.0	-1.53	6.8	0.75	136.7	-6.2	-0.94	12.5	1.12	45S	Ø	L166
L167	249.7	-13.2	-1.35	14.2	1.57	148.3	5.4	0.81	5.2	0.47	45S	Ø	L167
L173B	258.3	-4.6	-0.47	7.5	0.83	146.7	3.7	0.56	12.1	1.08	45S	Ø	L173B
L176S	267.3	4.4	0.44	7.1	0.79	142.9	-0.1	-0.02	13.3	1.20	45S	Ø	L176S
L190C	248.9	-14.0	-1.43	8.0	0.88	140.1	-2.9	-0.44	13.3	1.20	45S	Ø	L190C
L190R	246.2	-16.7	-1.70	6.6	0.73	134.2	-8.8	-1.32	10.5	0.94	45S	Ø	L190R
L195	246.7	-16.2	-1.65	7.1	0.78	139.7	-3.2	-0.49	15.3	1.37	45S	Ø	L195
L203	256.7	-6.2	-0.64	10.3	1.14	138.7	-4.2	-0.64	13.1	1.18	45S	Ø	L203
L211	249.0	-13.9	-1.42	18.0	1.99	143.2	0.2	0.04	11.4	1.02	45S	Ø	L211
L213	227.0	-35.9	-3.66	7.9	0.87	131.0	-12.0	-1.80	10.4	0.93	45S	X	L213
L223	258.8	-4.1	-0.42	9.3	1.03	134.6	-8.4	-1.26	9.2	0.83	45S	Ø	L223
L224	320.3	57.4	5.86	9.0	0.99	155.3	12.4	1.86	10.3	0.93	45S	#	L224
L228	280.7	17.8	1.82	9.0	1.00	151.5	8.5	1.28	8.9	0.80	45S	Ø	L228
L230S	265.7	2.8	0.28	9.6	1.06	145.1	2.2	0.33	13.4	1.21	45S	Ø	L230S
L231	271.7	8.8	0.90	12.0	1.32	153.5	10.6	1.59	10.3	0.93	45S	Ø	L231
L233	261.9	-1.0	-0.10	9.8	1.08	144.9	1.9	0.29	8.5	0.76	45S	Ø	L233
L241	331.7	68.8	7.02	7.5	0.88	165.0	22.0	3.31	9.1	0.82	45S	#	L241
L249	260.3	-2.6	-0.27	7.3	0.80	143.4	0.4	0.07	14.2	1.28	45S	Ø	L249
L254	265.9	3.0	0.31	8.1	0.90	150.2	7.2	1.09	12.2	1.10	45S	Ø	L254
L255	258.6	-4.3	-0.44	3.4	0.37	147.5	4.5	0.68	11.3	1.02	45S	Ø	L255
L257A	261.3	-1.6	-0.16	10.9	1.20	135.2	-7.8	-1.17	5.7	0.51	45S	Ø	L257A
L257B	268.9	6.0	0.61	12.6	1.39	142.5	-0.5	-0.08	11.1	1.00	45S	Ø	L257B
L257C	257.3	-5.6	-0.57	9.0	1.00	140.9	-2.1	-0.32	7.0	0.63	45S	Ø	L257C
L259	280.1	17.2	1.76	10.2	1.13	152.8	9.8	1.48	12.1	1.09	45S	Ø	L259
L260	256.8	-6.1	-0.62	7.5	0.83	145.3	2.4	0.36	11.9	1.07	45S	Ø	L260
L261	258.8	-4.1	-0.42	8.3	0.91	135.4	-7.6	-1.14	6.4	0.58	45S	Ø	L261
L262	261.1	-1.8	-0.19	6.2	0.68	138.8	-4.2	-0.63	6.1	0.55	45S	Ø	L262
L275	269.0	6.1	0.62	7.4	0.81	147.0	4.0	0.61	12.2	1.10	45S	Ø	L275
L278	265.3	2.4	0.25	9.2	1.02	151.1	8.1	1.22	6.9	0.62	45S	Ø	L278
L281	263.2	0.3	0.03	12.7	1.40	144.0	1.0	0.16	17.0	1.53	45S	Ø	L281
L285	263.3	0.4	0.04	13.2	1.46	135.3	-7.6	-1.15	16.2	1.46	45S	Ø	L285
L288	267.5	4.6	0.47	4.7	0.52	142.5	-0.5	-0.08	12.2	1.10	45S	Ø	L288
L290	239.0	-23.9	-2.44	10.0	1.11	132.7	-10.3	-1.55	9.2	0.83	45S	*	L290
L291S	272.5	9.6	0.98	6.5	0.72	148.5	5.5	0.83	12.1	1.09	45S	Ø	L291S
L297	260.3	-2.6	-0.26	6.1	0.68	147.7	4.7	0.71	12.4	1.11	45S	Ø	L297
L301	NO DATA REPORTED FOR SAMPLE H45					145.7	2.8	0.42	12.3	1.11	45S	M	L301
L305	262.7	-0.2	-0.02	9.6	1.06	136.3	-6.6	-1.00	8.1	0.73	45S	Ø	L305
L308	257.6	-5.3	-0.54	9.4	1.04	141.3	-1.6	-0.25	15.9	1.43	45S	Ø	L308
L312	274.7	11.8	1.20	6.4	0.71	142.7	-0.3	-0.05	14.1	1.27	45S	Ø	L312
L317	266.1	3.2	0.32	10.2	1.12	135.2	-7.8	-1.17	11.6	1.05	45S	Ø	L317
L318	263.7	0.8	0.08	10.7	1.18	137.3	-5.6	-0.85	14.6	1.32	45S	Ø	L318
L321	254.0	-8.9	-0.91	10.6	1.17	127.7	-15.3	-2.30	7.3	0.66	45S	Ø	L321
L323	275.7	12.8	1.30	9.8	1.08	139.7	-3.3	-0.50	11.4	1.03	45S	Ø	L323
L326	295.9	33.0	3.36	5.7	0.63	140.8	-2.2	-0.33	9.4	0.84	45S	X	L326
L328	269.0	6.1	0.62	9.1	1.01	144.3	1.4	0.21	12.0	1.08	45S	Ø	L328

ANALYSIS T45-1 TABLE 1
SMOOTHNESS, SHEFFIELD UNITS
SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

LAB CODE	SAMPLE H45 MBAN	PRINTING 84 GRAMS PER SQUARE METER				SAMPLE J12 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. 15		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L341	257.7	-5.2	-0.53	6.6	.72	138.1	-4.8	-0.73	11.3	1.02	45S	Ø	L341
L342	275.7	12.8	1.30	12.4	1.37	143.6	.6	.10	9.3	.84	45S	Ø	L342
L349	266.2	3.3	.34	11.1	1.22	135.7	-7.2	-1.09	11.3	1.01	45S	Ø	L349
L352	282.3	19.4	1.98	8.1	.89	150.5	7.5	1.13	14.9	1.34	45S	Ø	L352
L350	259.4	-3.5	-0.36	7.1	.78	136.1	-6.8	-1.03	7.2	.65	45S	Ø	L360
L366	260.9	-2.0	-0.21	10.1	1.12	144.1	1.2	.18	14.9	1.34	45S	Ø	L366
L370	250.3	-12.6	-1.29	6.9	.76	136.3	-6.7	-1.01	10.6	.95	45S	Ø	L370
L372	260.5	-2.4	-0.24	4.8	.53	156.3	13.4	2.01	8.3	.75	45S	Ø	L372
L376	253.3	-9.6	-0.98	10.6	1.17	148.0	5.0	.76	15.1	1.36	45S	Ø	L376
L380	260.0	-2.9	-0.30	4.2	.47	131.0	-12.0	-1.80	7.8	.71	45S	Ø	L380
L382	251.5	-11.4	-1.16	4.2	.46	136.1	-6.8	-1.03	10.6	.95	45S	Ø	L382
L390	254.3	-8.6	-0.88	9.4	1.04	134.2	-8.8	-1.32	11.4	1.03	45S	Ø	L390
L396M	266.3	3.4	.35	9.3	1.03	140.3	-2.6	-0.40	12.7	1.15	45S	Ø	L396M
L554	263.9	1.0	.10	9.6	1.06	144.1	1.2	.18	6.8	.62	45S	Ø	L554
L561	304.0	41.1	4.19	6.3	.70	150.0	7.0	1.06	6.5	.59	45S	#	L561
L575	280.2	17.3	1.76	10.7	1.18	141.7	-1.2	-0.19	10.6	.95	45S	Ø	L575
L587	258.3	-4.6	-0.47	11.4	1.26	142.0	-1.0	-0.15	8.6	.78	45S	Ø	L587
L597	288.1	25.2	2.57	4.2	.46	146.9	3.9	.59	9.7	.87	45S	#	L597
L607	249.3	-13.6	-1.38	8.0	.88	149.5	6.5	.98	7.3	.65	45S	Ø	L607
L626	258.7	-4.2	-0.43	10.8	1.20	136.7	-6.2	-0.94	9.5	.86	45S	Ø	L626

GR. MEAN = 262.9 SHEFF. UNITS GRAND MEAN = 143.0 SHEFF. UNITS TEST DETERMINATIONS = 15
SD MEANS = 9.8 SHEFF. UNITS SD OF MEANS = 6.7 SHEFF. UNITS 78 LABS IN GRAND MEANS
AVERAGE SDR = 9.1 SHEFF. UNITS AVERAGE SDR = 11.1 SHEFF. UNITS

L174 307.1 44.2 4.51 5.9 .65 231.1 88.1 13.24 7.8 .70 45R * L174
TOTAL NUMBER OF LABORATORIES REPORTING = 86

Best values: H45 265 ± 16 Sheffield units
J12 140 ± 11 Sheffield units

The following laboratories were omitted from the grand means because of extreme test results: 124, 224, 241, 561

TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T45-1 TABLE 2
SMOOTHNESS, SHEFFIELD UNITS
SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY	TEST INSTRUMENT	CONDITIONS
		H45	J12	MAJOR	MINOR	R.SDR	VAR			
L301	M		145.7			1.11	45S	SMOOTHNESS,	SHEFFIELD	
L124	#	210.1	131.1	-53.4	9.0	.85	45S	SMOOTHNESS,	SHEFFIELD	
L213	X	227.0	131.0	-37.8	2.5	.90	45S	SMOOTHNESS,	SHEFFIELD	
L290	*	239.0	132.7	-26.0	-4.5	.97	45S	SMOOTHNESS,	SHEFFIELD	
L190R	ø	246.2	134.2	-18.8	-1.8	.84	45S	SMOOTHNESS,	SHEFFIELD	
L195	ø	246.7	139.7	-16.2	3.1	1.08	45S	SMOOTHNESS,	SHEFFIELD	
L166	ø	247.9	136.7	-16.2	-4.1	.94	45S	SMOOTHNESS,	SHEFFIELD	
L190C	ø	248.9	140.1	-14.0	2.6	1.04	45S	SMOOTHNESS,	SHEFFIELD	
L211	ø	249.0	143.2	-12.8	5.5	1.51	45S	SMOOTHNESS,	SHEFFIELD	
L607	ø	249.3	149.5	-10.1	11.1	.77	45S	SMOOTHNESS,	SHEFFIELD	
L157	ø	249.7	148.3	-10.2	10.0	1.02	45S	SMOOTHNESS,	SHEFFIELD	
L370	ø	250.3	136.3	-14.2	-1.4	.86	45S	SMOOTHNESS,	SHEFFIELD	
L382	ø	251.5	136.1	-13.1	-2.0	.71	45S	SMOOTHNESS,	SHEFFIELD	
L158	ø	252.0	134.3	-13.4	-3.9	1.06	45S	SMOOTHNESS,	SHEFFIELD	
L115	ø	252.3	150.7	-6.9	11.1	1.02	45S	SMOOTHNESS,	SHEFFIELD	
L152	ø	253.1	148.0	-7.2	8.4	.88	45S	SMOOTHNESS,	SHEFFIELD	
L376	ø	253.3	148.0	-7.0	8.3	1.27	45S	SMOOTHNESS,	SHEFFIELD	
L321	ø	254.0	127.7	-14.0	-10.8	.91	45S	SMOOTHNESS,	SHEFFIELD	
L390	ø	254.3	134.2	-11.3	-4.8	1.03	45S	SMOOTHNESS,	SHEFFIELD	
L203	ø	256.7	138.7	-7.4	-1.6	1.16	45S	SMOOTHNESS,	SHEFFIELD	
L123	ø	256.7	138.3	-7.6	-2.0	1.16	45S	SMOOTHNESS,	SHEFFIELD	
L260	ø	256.8	145.3	-4.8	4.5	.95	45S	SMOOTHNESS,	SHEFFIELD	
L257C	ø	257.3	140.9	-6.0	.2	.81	45S	SMOOTHNESS,	SHEFFIELD	
L308	ø	257.6	141.3	-5.5	.5	1.23	45S	SMOOTHNESS,	SHEFFIELD	
L341	ø	257.7	138.1	-6.6	-2.5	.87	45S	SMOOTHNESS,	SHEFFIELD	
L108	ø	257.9	154.1	-4.4	12.2	.76	45S	SMOOTHNESS,	SHEFFIELD	
L587	ø	258.3	142.0	-4.6	.8	1.02	45S	SMOOTHNESS,	SHEFFIELD	
L135S	ø	258.3	156.3	.8	14.1	.91	45S	SMOOTHNESS,	SHEFFIELD	
L173B	ø	258.3	146.7	-2.8	5.2	.96	45S	SMOOTHNESS,	SHEFFIELD	
L255	ø	258.6	147.5	-2.3	5.8	.70	45S	SMOOTHNESS,	SHEFFIELD	
L626	ø	258.7	136.7	-6.3	-4.2	1.03	45S	SMOOTHNESS,	SHEFFIELD	
L223	ø	258.8	134.6	-7.0	-6.2	.93	45S	SMOOTHNESS,	SHEFFIELD	
L261	ø	258.8	135.4	-6.7	-5.5	.75	45S	SMOOTHNESS,	SHEFFIELD	
L360	ø	259.4	136.1	-5.8	-5.0	.72	45S	SMOOTHNESS,	SHEFFIELD	
L380	ø	260.0	131.0	-7.2	-10.0	.59	45S	SMOOTHNESS,	SHEFFIELD	
L249	ø	260.3	143.4	-2.3	1.4	1.04	45S	SMOOTHNESS,	SHEFFIELD	
L297	ø	260.3	147.7	-6.6	5.3	.89	45S	SMOOTHNESS,	SHEFFIELD	
L372	ø	260.5	156.3	2.9	13.3	.64	45S	SMOOTHNESS,	SHEFFIELD	
L366	ø	260.9	144.1	-1.4	1.9	1.23	45S	SMOOTHNESS,	SHEFFIELD	
L262	ø	261.1	138.8	-3.3	-3.2	.61	45S	SMOOTHNESS,	SHEFFIELD	
L257A	ø	261.3	135.2	-4.4	-6.6	.86	45S	SMOOTHNESS,	SHEFFIELD	
L233	ø	261.9	144.9	-2.2	2.1	.92	45S	SMOOTHNESS,	SHEFFIELD	
L121	ø	262.0	142.5	-1.0	-4.1	1.40	45S	SMOOTHNESS,	SHEFFIELD	
L162	ø	262.3	138.7	-2.2	-3.8	.66	45S	SMOOTHNESS,	SHEFFIELD	
L305	ø	262.7	136.3	-2.7	-6.1	.90	45S	SMOOTHNESS,	SHEFFIELD	
L281	ø	263.2	144.0	.7	.6	1.47	45S	SMOOTHNESS,	SHEFFIELD	
L125	ø	263.3	139.0	-1.1	-3.8	1.45	45S	SMOOTHNESS,	SHEFFIELD	
L285	ø	263.3	135.3	-2.5	-7.2	1.46	45S	SMOOTHNESS,	SHEFFIELD	
L318	ø	263.7	137.3	-1.4	-5.5	1.25	45S	SMOOTHNESS,	SHEFFIELD	
L554	ø	263.9	144.1	1.4	.7	.84	45S	SMOOTHNESS,	SHEFFIELD	
L278	ø	265.3	151.1	5.3	6.6	.82	45S	SMOOTHNESS,	SHEFFIELD	
L230S	ø	265.7	145.1	3.4	1.0	1.14	45S	SMOOTHNESS,	SHEFFIELD	
L254	ø	265.9	150.2	5.5	5.6	1.00	45S	SMOOTHNESS,	SHEFFIELD	
L317	ø	266.1	135.2	-4.0	-8.4	1.08	45S	SMOOTHNESS,	SHEFFIELD	
L349	ø	266.2	135.7	.3	-7.9	1.12	45S	SMOOTHNESS,	SHEFFIELD	
L396M	ø	266.3	140.3	2.2	-3.7	1.09	45S	SMOOTHNESS,	SHEFFIELD	
L148	ø	266.5	152.6	6.9	7.6	.87	45S	SMOOTHNESS,	SHEFFIELD	
L159	ø	266.9	146.1	4.8	1.4	1.06	45S	SMOOTHNESS,	SHEFFIELD	
L176S	ø	267.3	142.9	4.0	-1.7	.99	45S	SMOOTHNESS,	SHEFFIELD	
L288	ø	267.5	142.5	4.0	-2.2	.81	45S	SMOOTHNESS,	SHEFFIELD	
L128	ø	268.0	145.3	5.6	.3	.85	45S	SMOOTHNESS,	SHEFFIELD	
L257B	ø	268.9	142.5	5.4	-2.7	1.20	45S	SMOOTHNESS,	SHEFFIELD	
L275	ø	269.0	147.0	7.2	1.4	.96	45S	SMOOTHNESS,	SHEFFIELD	
L328	ø	269.0	144.3	6.2	-1.0	1.04	45S	SMOOTHNESS,	SHEFFIELD	
L114	ø	270.7	143.0	7.2	-2.9	1.14	45S	SMOOTHNESS,	SHEFFIELD	


TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T45-1 TABLE 2
SMOOTHNESS, SHEFFIELD UNITS
SHEFFIELD TESTER IS STANDARD FOR THIS ANALYSIS

JUNE 1978

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY	TEST INSTRUMENT	CONDITIONS
		R45	J12	MAJOR	MINOR	R.SDR	VAR			
L231	Ø	271.7	153.5	12.2	6.4	1.13	45S	SMOOTHNESS,	SHEFFIELD	
L291S	Ø	272.5	148.5	10.9	1.5	.90	45S	SMOOTHNESS,	SHEFFIELD	
L157	Ø	272.6	144.0	9.4	-2.7	1.06	45S	SMOOTHNESS,	SHEFFIELD	
L132	Ø	272.7	144.4	9.6	-2.4	1.24	45S	SMOOTHNESS,	SHEFFIELD	
L312	Ø	274.7	142.7	10.8	-4.7	.99	45S	SMOOTHNESS,	SHEFFIELD	
L126	Ø	275.0	142.0	10.8	-5.5	.97	45S	SMOOTHNESS,	SHEFFIELD	
L107	Ø	275.3	159.3	17.7	10.5	1.31	45S	SMOOTHNESS,	SHEFFIELD	
L342	Ø	275.7	143.6	12.1	-4.2	1.11	45S	SMOOTHNESS,	SHEFFIELD	
L323	Ø	275.7	139.7	10.6	-7.9	1.05	45S	SMOOTHNESS,	SHEFFIELD	
L122	Ø	277.7	138.1	11.8	-10.1	.80	45S	SMOOTHNESS,	SHEFFIELD	
L259	Ø	280.1	152.8	19.7	2.6	1.11	45S	SMOOTHNESS,	SHEFFIELD	
L575	Ø	280.2	141.7	15.5	-7.7	1.06	45S	SMOOTHNESS,	SHEFFIELD	
L228	Ø	280.7	151.5	19.7	1.1	.90	45S	SMOOTHNESS,	SHEFFIELD	
L352	Ø	282.3	150.5	20.8	-.4	1.12	45S	SMOOTHNESS,	SHEFFIELD	
L153	*	284.1	158.1	25.4	6.0	1.04	45S	SMOOTHNESS,	SHEFFIELD	
L597	*	288.1	146.9	24.8	-5.9	.67	45S	SMOOTHNESS,	SHEFFIELD	
L326	X	295.9	140.8	29.7	-14.5	.73	45S	SMOOTHNESS,	SHEFFIELD	
L561	#	304.0	150.0	40.7	-9.0	.64	45S	SMOOTHNESS,	SHEFFIELD	
L174	+	307.1	231.1	74.3	64.8	.67	45R	SMOOTHNESS,	SHEFFIELD,	NON-STANDARD INSTRUMENT
L224	#	320.3	155.3	57.8	-10.3	.96	45S	SMOOTHNESS,	SHEFFIELD	
L241	#	331.7	165.0	72.0	-5.6	.85	45S	SMOOTHNESS,	SHEFFIELD	
GMEANS:		262.9	143.0			1.00				
		95% ELLIPSE:		25.9	14.6			WITH GAMMA = 22 DEGREES		

SMOOTHNESS, SHEFFIELD

SAMPLE H45 = 263. SHEFF. UNITS SAMPLE J12 = 143. SHEFF. UNITS

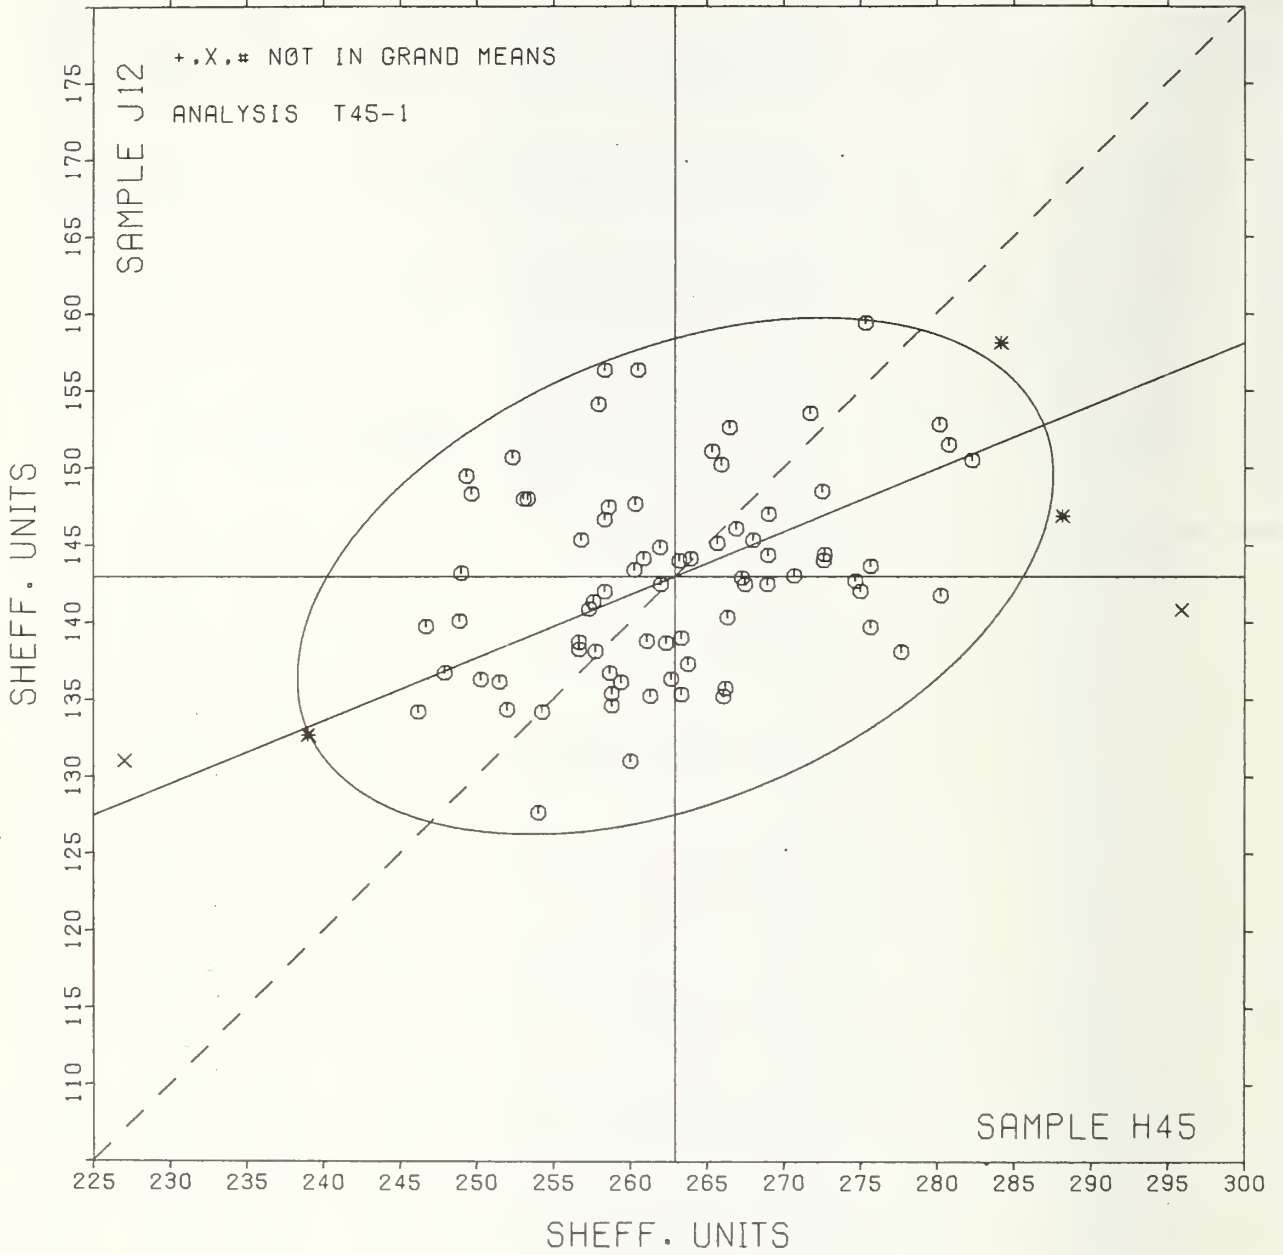

TAPPI SUGGESTED METHOD T479 SU-71, SMOOTHNESS OF PAPER (BEKK METHOD)

LAB CODE	SAMPLE H45 MEAN	PRINTING 84 GRAMS PER SQUARE METER				SAMPLE J12 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. = 15		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L139B	16.27	1.06	.84	.59	.74	32.53	-.24	-.11	4.27	.98	45K	Ø	L139B
L162	6.44	-8.76	-6.93	.47	.59	26.73	-6.04	-2.68	3.35	.77	45K	#	L162
L176	12.63	-2.58	-2.04	.48	.60	23.55	-9.22	-4.09	2.34	.54	45K	#	L176
L182K	13.25	-1.95	-1.54	.61	.76	29.69	-3.08	-1.37	3.56	.82	45K	Ø	L182K
L190C	15.43	.23	.18	.81	1.01	34.60	1.82	.81	5.36	1.23	45K	Ø	L190C
L230B	14.47	-.74	-.58	.92	1.14	35.47	2.69	1.19	3.81	.88	45K	Ø	L230B
L243K	14.96	-.24	-.19	.55	.69	31.67	-1.11	-.49	4.48	1.03	45K	Ø	L243K
L291K	17.17	1.97	1.56	1.31	1.63	34.87	2.09	.93	5.14	1.19	45K	Ø	L291K
L581	14.87	-.34	-.27	.83	1.04	30.60	-2.18	-.97	3.81	.88	45K	Ø	L581

GR. MEAN = 15.20 BEKK SECONDS GRAND MEAN = 32.78 BEKK SECONDS TEST DETERMINATIONS = 15
SD MEANS = 1.26 BEKK SECONDS SD OF MEANS = 2.25 BEKK SECONDS 7 LABS IN GRAND MEANS
AVERAGE SDR = .80 BEKK SECONDS AVERAGE SDR = 4.35 BEKK SECONDS

L182G	35.50	20.30	16.06	2.51	3.12	104.17	71.39	31.68	11.50	2.64	45H	*	L182G
L250M	16.57	1.37	1.08	.83	1.04	30.93	-1.84	-.82	2.58	.59	45L	*	L250M
L251	14.13	-1.07	-.85	.77	.95	26.97	-5.81	-2.58	2.83	.65	45L	*	L251
L388	40.67	25.46	20.15	4.89	6.08	202.94	170.16	75.52	26.14	6.01	45H	*	L388

TOTAL NUMBER OF LABORATORIES REPORTING = 13

Best values: H45 15 Bekk seconds
J12 31 Bekk seconds

The following laboratories were omitted from the grand means because of extreme test results: 176

Data from the following laboratories appear to be off by a multiplicative factor: 162

TAPPI SUGGESTED METHOD T479 SU-71, SMOOTHNESS OF PAPER (BEKK METHOD)

LAB CODE	P	MEANS		COORDINATES		AVG R.SDR	VAR	PROPERTY	TEST INSTRUMENT	CONDITIONS
		H45	J12	MAJOR	MINOR					
L162	#	6.44	26.73	-8.77	6.04	.68	45K	SMOOTHNESS,	BEKK	
L176	#	12.63	23.55	-9.53	-.88	.57	45K	SMOOTHNESS,	BEKK	
L182K	Ø	13.25	29.69	-3.57	-.72	.79	45K	SMOOTHNESS,	BEKK	
L251	*	14.13	26.97	-5.81	-1.07	.80	45L	SMOOTHNESS,	BEKK,	20 C, 65% RH
L230B	Ø	14.47	35.47	2.25	1.65	1.01	45K	SMOOTHNESS,	8EKK	
L581	Ø	14.87	30.60	-2.15	-.46	.96	45K	SMOOTHNESS,	BEKK	
L243K	Ø	14.96	31.67	-1.12	-.17	.86	45K	SMOOTHNESS,	BEKK	
L190C	Ø	15.43	34.60	1.79	.43	1.12	45K	SMOOTHNESS,	8EKK	
L139B	Ø	16.27	32.53	.15	-1.08	.86	45K	SMOOTHNESS,	8EKK	
L250M	*	16.57	30.93	-1.23	-1.94	.82	45L	SMOOTHNESS,	8EKK,	20 C, 65% RH
L291K	Ø	17.17	34.87	2.66	-1.10	1.41	45K	SMOOTHNESS,	BEKK	
L182G	*	35.50	104.17	73.94	6.46	2.88	45H	SMOOTHNESS,	GURLEY OIL FLOTATION	
L388	*	40.67	202.94	168.08	36.81	6.05	45H	SMOOTHNESS,	GURLEY OIL FLOTATION	

GMEANS: 15.20 32.78 1.00
95% ELLIPSE: 8.87 3.74 WITH GAMMA = 69 DEGREES

LAB CODE	SAMPLE H45 MEAN	PRINTING 84 GRAMS PER SQUARE METER				SAMPLE J12 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N. DEV	SDR	R. SDR		DEV	N. DEV	SDR	R. SDR	VAR	F	LAB
L176	458.	-2.	-.02	9.	.22	175.	-0.	-.02	9.	.39	47B	Ø	L176
L182B	577.	117.	.98	69.	1.66	189.	14.	.93	26.	1.08	47B	Ø	L182B
L236	449.	-11.	-.09	26.	.63	184.	9.	.59	23.	.95	47B	Ø	L236
L243B	464.	4.	.03	60.	1.45	166.	-9.	-.64	20.	.85	47B	Ø	L243B
L244	220.	-240.	-2.00	16.	.37	156.	-20.	-1.36	23.	.96	47B	Ø	L244
L248	417.	-43.	-.36	37.	.88	165.	-11.	-.75	24.	1.01	47B	Ø	L248
L280	621.	161.	1.34	83.	1.98	201.	25.	1.69	40.	1.67	47B	Ø	L280
L333	379.	-81.	-.67	38.	.91	162.	-14.	-.93	32.	1.35	47B	Ø	L333
L484	555.	95.	.79	37.	.88	183.	7.	.49	18.	.74	47B	Ø	L484

GR. MEAN = 460. ML/MIN
SD MEANS = 120. ML/MIN

GRAND MEAN = 176. ML/MIN
SD OF MEANS = 15. ML/MIN

TEST DETERMINATIONS = 10
9 LABS IN GRAND MEANS

AVERAGE SDR = 42. ML/MIN

AVERAGE SDR = 24. ML/MIN

TOTAL NUMBER OF LABORATORIES REPORTING = 9

Best values: H45 460 milliliter per minute
J12 175 milliliter per minute

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		H45	J12	MAJOR	MINOR	R.SDR	VAR	
L244	Ø	220.	156.	-241.	6.	.67	47B	SMOOTHNESS, BENDTSEN, WG 150
L333	Ø	379.	162.	-82.	-5.	1.13	47B	SMOOTHNESS, BENDTSEN, WG 150
L248	Ø	417.	165.	-44.	-6.	.95	47B	SMOOTHNESS, BENDTSEN, WG 150
L236	Ø	449.	184.	-10.	10.	.79	47B	SMOOTHNESS, BENDTSEN, WG 150
L176	Ø	458.	175.	-2.	-0.	.30	47B	SMOOTHNESS, BENDTSEN, WG 150
L243B	Ø	464.	166.	3.	-10.	1.15	47B	SMOOTHNESS, BENDTSEN, WG 150
L484	Ø	555.	183.	95.	-3.	.81	47B	SMOOTHNESS, BENDTSEN, WG 150
L182B	Ø	577.	189.	118.	1.	1.37	47B	SMOOTHNESS, BENDTSEN, WG 150
L280	Ø	621.	201.	163.	7.	1.82	47B	SMOOTHNESS, BENDTSEN, WG 150
GMEANS:		460.	176.			1.00		
		95% ELLIPSE:	397.	22.		WITH GAMMA = 6 DEGREES		

ANALYSIS T60-1 TABLE 1

OPACITY (89% REFLECTANCE BACKING) IN PERCENT

TAPPI STANDARD T425 6S=75, OPACITY OF PAPER (15 DEG./DIFFUSE, ILLUMINANT A) = B&L TYPE

LAB CODE	SAMPLE E40 MEAN	COATED DULL				SAMPLE J57 MEAN	PRINTING				TEST D. = 10		
		117 GRAMS PER SQUARE METER DEV	N.DEV	SDR	R.SDR		94 GRAMS PER SQUARE METER DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L105	96.48	.32	1.04	.14	.66	93.56	.82	1.51	.25	.69	60H	6	L105
L108	96.08	-.08	-.24	.06	.30	92.73	-.01	-.03	.19	.53	60B	6	L108
L115	96.07	-.09	-.28	.40	1.88	93.08	.34	.62	.39	1.04	60B	6	L115
L118	96.36	.20	.65	.13	.60	93.22	.48	.88	.25	.68	60B	6	L118
L121	95.93	-.23	-.72	.18	.87	92.45	-.29	-.54	.51	1.37	60B	6	L121
L122	92.31	-3.85	-12.31	.15	.72	86.31	-6.43	-11.92	.26	.71	60D	#	L122
L123	96.20	.04	.14	.16	.74	92.64	-.10	-.19	.34	.93	60W	6	L123
L124	55.62	-.54	-1.72	.47	2.21	92.12	-.62	-1.16	.36	.98	60B	6	L124
L125	96.13	-.03	-.08	.22	1.05	92.80	.06	.10	.32	.85	60H	6	L125
L131	95.89	-.27	-.85	.22	1.06	92.06	-.68	-1.27	.17	.46	60R	6	L131
L132	95.83	-.33	-1.04	.08	.39	92.60	-.14	-.27	.53	1.42	60B	6	L132
L136	95.91	-.25	-.79	.10	.47	92.41	-.33	-.62	.32	.88	60H	6	L136
L139	96.08	-.08	-.24	.16	.77	92.90	.16	.29	.38	1.03	60B	6	L139
L148H	96.29	.13	.43	.15	.72	92.32	-.42	-.79	.38	1.02	6GH	*	L148H
L152	96.34	.18	.59	.16	.78	93.06	.32	.58	.41	1.10	60B	6	L152
L153	56.45	.29	.94	.37	1.75	93.05	.31	.57	.44	1.18	60B	6	L153
L157	96.60	.44	1.42	.32	1.50	93.40	.66	1.21	.57	1.53	60B	6	L157
L158	96.49	.33	1.07	.16	.76	93.44	.70	1.29	.42	1.15	60D	6	L158
L159	96.34	.18	.59	.13	.60	92.76	.02	.03	.34	.91	60R	6	L159
L162	96.49	.33	1.07	.12	.57	93.30	.56	1.03	.47	1.27	60W	6	L162
L166	95.73	-.43	-1.36	.13	.59	92.11	-.63	-1.17	.44	1.18	60B	6	L166
L173A	56.47	.31	1.00	.12	.55	93.58	.84	1.55	.26	.70	60B	6	L173A
L182	55.85	-.31	-.98	.41	1.95	92.15	-.59	-1.10	.24	.65	60B	6	L182
L190C	96.29	.13	.43	.15	.72	93.05	.31	.57	.27	.73	60B	6	L190C
L190R	96.24	.08	.27	.14	.68	92.73	-.01	-.03	.21	.56	60B	6	L190R
L206	96.19	.03	.11	.12	.57	92.76	.02	.03	.23	.61	60B	6	L206
L210B	96.17	.01	.04	.08	.39	92.76	.02	.03	.31	.84	60B	6	L210B
L210D	96.20	.04	.14	.12	.55	92.72	-.02	-.04	.36	.99	60D	6	L210D
L211S	96.02	-.14	-.44	.23	1.09	92.94	.20	.36	.41	1.10	60R	6	L211S
L213	95.93	-.23	-.72	.09	.45	92.44	-.30	-.56	.39	1.05	60B	6	L213
L223B	96.52	.36	1.16	.11	.54	93.28	.54	.99	.31	.83	60B	6	L223B
L225	96.05	-.11	-.34	.33	1.57	92.44	-.30	-.56	.64	1.73	60B	6	L225
L228	96.07	-.09	-.28	.16	.74	92.69	-.05	-.10	.21	.56	60H	6	L228
L230	96.26	.10	.33	.13	.64	92.53	-.21	-.40	.43	1.16	60B	6	L230
L233B	95.50	-.66	-2.10	.71	3.35	92.20	-.54	-1.01	.71	1.93	60B	*	L233B
L236B	95.46	-.70	-2.23	.41	1.94	91.40	-1.34	-2.49	.00	.00	60B	6	L236B
L238A	95.50	-.66	-2.10	.09	.45	91.62	-1.12	-2.08	.35	.93	60R	6	L238A
L241	96.03	-.13	-.40	.22	1.02	93.00	.26	.47	.32	.86	60B	6	L241
L243	96.19	.03	.11	.15	.72	92.62	-.12	-.23	.42	1.15	60B	6	L243
L254	96.60	.44	1.42	.17	.80	93.62	.88	1.62	1.01	2.73	60H	6	L254
L255	95.99	-.17	-.53	.13	.61	92.92	.18	.33	.41	1.11	60B	6	L255
L259	96.22	.06	.20	.19	.91	93.12	.38	.70	.38	1.03	60B	6	L259
L261	96.70	.54	1.74	.42	2.00	93.17	.43	.79	.25	.67	60B	6	L261
L262	55.85	-.31	-.98	.23	1.08	91.98	-.76	-1.42	.15	.42	60B	6	L262
L275	96.04	-.12	-.37	.13	.64	92.23	-.51	-.95	.19	.53	60R	6	L275
L278	96.52	.36	1.16	.18	.83	93.38	.64	1.18	.28	.76	60B	6	L278
L281	96.32	.16	.52	.13	.62	93.06	.32	.58	.21	.57	60D	6	L281
L285B	95.86	-.30	-.95	.26	1.23	92.24	-.50	-.93	.44	1.20	60B	6	L285B
L285R	96.03	-.13	-.40	.20	.95	91.95	-.79	-1.47	.30	.81	60R	6	L285R
L288	96.09	-.07	-.21	.03	.15	92.76	.02	.03	.38	1.02	60D	6	L288
L301	95.95	-.21	-.66	.10	.46	92.21	-.53	-.99	.35	.95	60B	6	L301
L305	96.08	-.08	-.24	.14	.66	92.60	-.14	-.27	.16	.42	60R	6	L305
L308	96.33	.17	.56	.25	1.18	93.19	.45	.83	.38	1.01	60H	6	L308
L315	96.11	-.05	-.15	.14	.69	92.50	-.24	-.45	.27	.74	60D	6	L315
L317	96.24	.08	.27	.22	1.03	92.69	-.05	-.10	.73	1.96	60B	6	L317
L318	96.30	.14	.46	.26	1.22	93.15	.41	.75	.24	.65	60B	6	L318
L323	97.04	.88	2.82	.35	1.66	93.85	1.11	2.05	.58	1.56	60W	*	L323
L326	96.51	.35	1.13	.54	2.56	93.07	.33	.60	.58	1.58	60B	6	L326
L328	95.90	-.26	-.82	.32	1.50	92.40	-.34	-.64	.70	1.89	60B	6	L328
L333	96.65	.49	1.58	.78	3.71	93.70	.96	1.77	.95	2.56	60B	6	L333
L339	96.25	.09	.30	.35	1.67	93.10	.36	.66	.52	1.40	60B	6	L339
L341	95.72	-.44	-1.40	.22	1.04	91.74	-1.00	-1.86	.41	1.10	60R	6	L341
L349	96.43	.27	.88	.09	.45	93.24	.50	.92	.07	.19	60D	6	L349
L352	95.98	-.18	-.56	.09	.44	92.40	-.34	-.64	.27	.74	60R	6	L352
L354	95.90	-.26	-.82	.32	1.50	92.20	-.54	-1.01	.63	1.71	60B	6	L354

ANALYSIS T60-1 TABLE 1

OPACITY (89% REFLECTANCE BACKING) IN PERCENT

TAPPI STANDARD T425 OS=75, OPACITY OF PAPER (15 DEG./DIFFUSE, ILLUMINANT A) - B&L TYPE

LAB CODE	SAMPLE E40 MEAN	COATED DULL 117 GRAMS PER SQUARE METER				SAMPLE J57 MEAN	PRINTING 94 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L366	95.44	-.72	-2.29	.50	2.35	92.84	.10	.18	.45	1.22	60B	X	L366
L390	96.40	.24	.78	.52	2.45	93.30	.56	1.03	.48	1.31	60B	Ø	L390
L523	96.01	-.15	-.47	.07	.35	92.42	-.32	-.60	.27	.74	60R	Ø	L523
L543	95.81	-.35	-1.11	.12	.57	92.05	-.69	-1.29	.26	.71	60D	Ø	L543
L561	94.80	-1.36	-4.34	.42	2.00	92.20	-.54	-1.01	.42	1.14	60B	X	L561
L581	96.15	-.01	-.02	.14	.64	92.67	-.07	-.14	.33	.90	60B	Ø	L581
L587	96.36	.20	.65	.17	.81	93.04	.30	.55	.22	.60	60B	Ø	L587
L592	95.97	-.19	-.60	.13	.63	91.99	-.75	-1.40	.23	.62	60W	Ø	L592
L594	95.78	-.38	-1.20	.14	.66	92.66	-.08	-.16	.26	.71	60D	Ø	L594
L597	96.00	-.16	-.50	.47	2.23	92.30	-.44	-.82	.48	1.31	60B	Ø	L597
L599	96.20	.04	.14	.35	1.66	93.15	.41	.75	.63	1.69	60B	Ø	L599
L608	97.03	.87	2.80	.14	.67	94.10	1.36	2.51	.26	.71	60D	*	L608
GR. MEAN = 96.16 PERCENT		GRAND MEAN = 92.74 PERCENT				TEST DETERMINATIONS = 10							
SD MEANS = .31 PERCENT		SD OF MEANS = .54 PERCENT				74 LABS IN GRAND MEANS							
AVERAGE SDR = .21 PERCENT		AVERAGE SDR = .37 PERCENT											
L224	95.65	-.51	-1.62	.41	1.95	91.40	-1.34	-2.49	.32	.85	60P	*	L224
L236E	96.73	.57	1.84	.11	.50	93.33	.59	1.08	.21	.56	60E	*	L236E
L249	96.34	.18	.59	.07	.33	92.49	-.25	-.47	.35	.94	60P	*	L249
L256	96.24	.09	.28	.12	.55	92.01	-.74	-1.36	.27	.73	60N	*	L256
L260	96.50	.34	1.10	.41	1.93	92.60	-.14	-.27	.32	.85	60P	*	L260
L309	95.23	-.93	-2.96	.16	.74	91.57	-1.17	-2.17	.36	.97	60A	*	L309
L312	95.85	-.31	-.98	.24	1.14	91.85	-.89	-1.66	.24	.65	60P	*	L312
L314	96.53	.37	1.20	.13	.63	93.34	.60	1.10	.47	1.28	60T	*	L314
L380	96.00	-.16	-.50	.00	.00	92.00	-.74	-1.38	.00	.00	60P	*	L380
L388	95.60	-.56	-1.78	.32	1.50	91.45	-1.29	-2.40	.50	1.34	60P	*	L388
TOTAL NUMBER OF LABORATORIES REPORTING = 87													

Best values: E40 96.2 ± 0.5 percent
 J57 92.7 ± 0.9 percent

The following laboratories were omitted from the grand means because of extreme test results: 122

OPACITY (89% REFLECTANCE BACKING) IN PERCENT
TAPPI STANDARD T425 6S-75, OPACITY OF PAPER (15 DEG./DIFFUSE, ILLUMINANT A) - B&L TYPE

LAB CODE	F	MEANS		COORDINATES		AVG R. SDR VAR	PROPERTY---TEST INSTRUMENT---CONDITIONS
		E40	J57	MAJOR	MINOR		
L122	#	92.31	86.31	-7.49	.31	.72 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L561	X	94.80	92.20	-1.13	.93	1.57 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L309	*	95.23	91.57	-1.47	.25	.86 60A	OPACITY (WHITE BACKING), ZEISS HLREPHØ, FILTER 4,86% BACKING
L366	X	95.44	92.84	-.26	.68	1.79 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L236B	Ø	95.46	91.40	-1.51	-.03	.97 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L238A	Ø	95.50	91.62	-1.30	.04	.69 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L233B	*	95.50	92.20	-.79	.32	2.64 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L388	*	95.60	91.45	-1.40	-.13	1.42 60P	OPACITY (WHITE BACKING), PHOTØVOLT
L124	Ø	95.62	92.12	-.80	.17	1.59 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L224	*	95.65	91.40	-1.42	-.20	1.40 60P	OPACITY (WHITE BACKING), PHOTØVOLT
L341	Ø	95.72	91.74	-1.09	-.10	1.07 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L166	Ø	95.73	92.11	-.76	.07	.89 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L594	Ø	95.78	92.66	-.25	.29	.69 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L543	Ø	95.81	92.05	-.78	-.03	.64 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L132	Ø	95.83	92.60	-.28	.22	.91 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L312	*	95.85	91.85	-.93	-.16	.90 60P	OPACITY (WHITE BACKING), PHOTØVOLT
L252	Ø	95.85	91.98	-.82	-.10	.75 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L182	Ø	95.85	92.15	-.67	-.01	1.30 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L285B	Ø	95.86	92.24	-.58	.02	1.21 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L131	Ø	95.89	92.06	-.73	-.09	.76 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L354	Ø	95.90	92.20	-.60	-.03	1.60 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L328	Ø	95.90	92.40	-.42	.06	1.69 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L136	Ø	95.91	92.41	-.41	.06	.67 60H	OPACITY (WHITE BACKING), HUYGEN
L121	Ø	95.93	92.45	-.57	.06	1.12 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L213	Ø	95.93	92.44	-.3B	.05	.75 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L301	Ø	95.95	92.21	-.57	-.07	.70 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L592	Ø	95.97	91.99	-.75	-.20	.63 60W	OPACITY (WHITE BACKING), HUYGEN, DIGITAL
L352	Ø	95.98	92.40	-.39	-.01	.59 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L255	Ø	95.99	92.92	.0B	.23	.86 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L380	*	96.00	92.00	-.73	-.22	.00 60P	OPACITY (WHITE BACKING), PHOTØVOLT
L597	Ø	96.00	92.30	-.46	-.07	1.77 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L523	Ø	96.01	92.42	-.35	-.03	.55 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L211S	#	96.02	92.94	.11	.21	1.10 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L285R	Ø	96.03	91.95	-.76	-.27	.88 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L241	Ø	96.03	93.00	.16	.23	.94 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L275	Ø	96.04	92.23	-.51	-.14	.58 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L225	Ø	96.05	92.44	-.32	-.05	1.65 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L115	Ø	96.07	93.08	.25	.24	1.46 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L228	Ø	96.07	92.69	-.09	.05	.65 60H	OPACITY (WHITE BACKING), HUYGEN
L139	Ø	96.08	92.90	.10	.14	.90 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L10B	Ø	96.08	92.73	-.05	.06	.41 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L305	Ø	96.08	92.60	-.16	-.00	.54 60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L288	Ø	96.09	92.76	-.02	.07	.59 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L315	Ø	96.11	92.50	-.24	-.08	.71 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L125	Ø	96.13	92.80	.04	.05	.95 60H	OPACITY (WHITE BACKING), HUYGEN
L581	Ø	96.15	92.67	-.07	-.03	.77 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L210B	Ø	96.17	92.76	.02	-.00	.61 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L243	Ø	96.19	92.62	-.09	-.09	.93 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L206	Ø	96.19	92.76	.03	-.02	.59 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L123	Ø	96.20	92.64	-.07	-.09	.83 60W	OPACITY (WHITE BACKING), HUYGEN, DIGITAL
L210D	Ø	96.20	92.72	-.00	-.05	.77 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L599	Ø	96.20	93.15	.38	.16	1.67 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L259	Ø	96.22	93.12	.36	.12	.97 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L190R	Ø	96.24	92.73	.03	-.08	.62 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L317	Ø	96.24	92.69	-.01	-.10	1.50 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L256	*	96.24	92.01	-.60	-.43	.64 60N	OPACITY (WHITE BACKING), HUNTER
L339	Ø	96.25	93.10	.36	.09	1.53 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L230	Ø	96.26	92.53	-.14	-.19	.90 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L19CC	Ø	96.29	93.05	.33	.03	.73 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L148H	*	96.29	92.32	-.31	-.32	.87 60H	OPACITY (WHITE BACKING), HUYGEN
L318	Ø	96.30	93.15	.43	.07	.94 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L281	Ø	96.32	93.06	.36	.01	.60 60D	OPACITY (WHITE BACKING), DIANØ/BNL
L308	Ø	96.33	93.19	.47	.06	1.10 60H	OPACITY (WHITE BACKING), HUYGEN
L249	*	96.34	92.49	-.14	-.2B	.64 60P	OPACITY (WHITE BACKING), PHOTØVOLT
L152	Ø	96.34	93.06	.37	-.01	.94 60B	OPACITY (WHITE BACKING), BAUSCH * LOMB


OPACITY (89% REFLECTANCE BACKING) IN PERCENT
TAPPI STANDARD T425 6S=75, OPACITY OF PAPER (15 DEG./DIFFUSE, ILLUMINANT A) - B&L TYPE

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		E40	J57	MAJOR	MINOR	R.SDR	VAR	
L159	Ø	96.34	92.76	.10	-.15	.76	60R	OPACITY (WHITE BACKING), THWING-ALBERT (FORMERLY SRL)
L587	Ø	96.36	93.04	.36	-.04	.71	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L118	Ø	96.36	93.22	.52	.05	.64	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L390	Ø	96.40	93.30	.60	.05	1.88	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L349	Ø	96.43	93.24	.57	-.00	.32	60D	OPACITY (WHITE BACKING), DIANØ/BNL
L153	Ø	96.45	93.05	.41	-.11	1.47	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L173A	Ø	96.47	93.58	.88	.12	.62	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L105	Ø	96.48	93.56	.87	.11	.68	60H	OPACITY (WHITE BACKING), HUYGEN
L162	Ø	96.49	93.30	.65	-.03	.92	60W	OPACITY (WHITE BACKING), HUYGEN,DIGITAL
L158	Ø	96.49	93.44	.77	.04	.95	60D	OPACITY (WHITE BACKING), DIANØ/BNL
L260	*	96.50	92.60	.04	-.37	1.39	60P	OPACITY (WHITE BACKING), PHOTOVOLT
L326	Ø	96.51	93.07	.46	-.16	2.07	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L278	Ø	96.52	93.38	.73	-.02	.80	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L223B	Ø	96.52	93.28	.64	-.06	.69	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L314	*	96.53	93.34	.70	-.04	.95	60T	OPACITY (WHITE BACKING), SMALL SPHERE COLOR EYE
L157	Ø	96.60	93.40	.79	-.08	1.52	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L254	Ø	96.60	93.62	.98	.03	1.77	60E	OPACITY (WHITE BACKING), HUYGEN
L333	Ø	96.65	93.70	1.08	.02	3.14	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L261	Ø	96.70	93.17	.63	-.27	1.34	60B	OPACITY (WHITE BACKING), BAUSCH * LOMB
L236E	*	96.73	93.33	.79	-.22	.53	60E	OPACITY (WHITE BACKING), ZEISS SLRPHØ, FMY=C(10) FILTER
L608	*	97.03	94.10	1.61	-.12	.69	60D	OPACITY (WHITE BACKING), DIANØ/BNL
L323	*	97.04	93.85	1.39	-.25	1.61	60W	OPACITY (WHITE BACKING), HUYGEN,DIGITAL
GMEANS:		96.16	92.74			1.00		
		95% ELLIPSE:		1.54	.32	WITH GAMMA = 61 DEGREES		

OPACITY, B&L TYPE, 89% BACKING

SAMPLE E40 = 96.16 PERCENT

SAMPLE J57 = 92.74 PERCENT

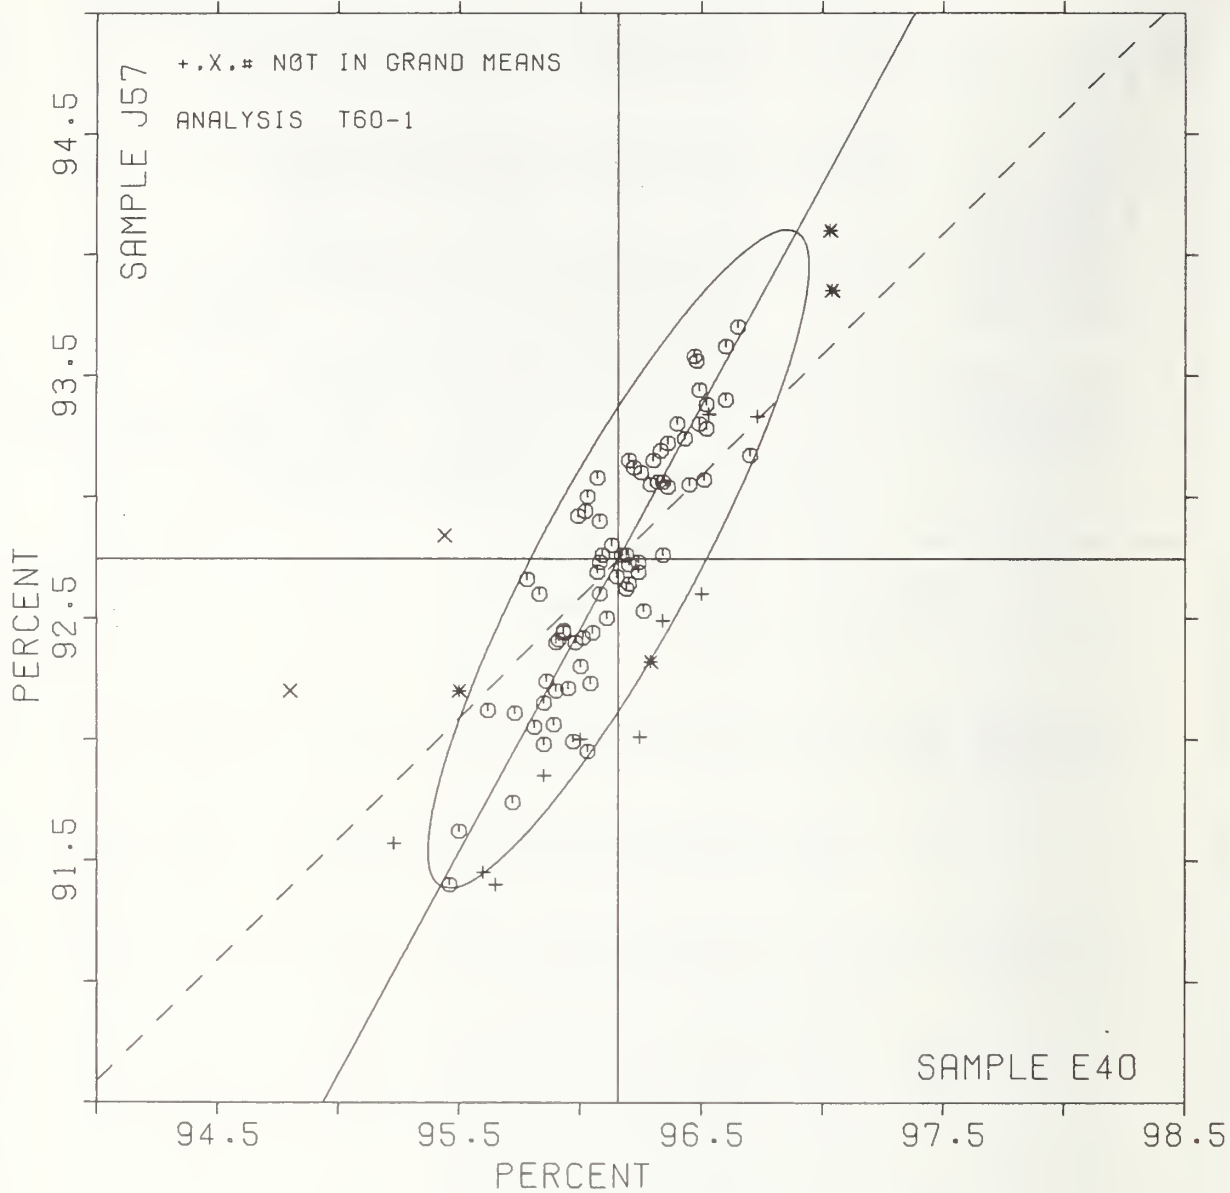

OPACITY (PAPER BACKING) IN PERCENT
TAPPI SUGGESTED METHOD T519 OS=78, DIFFUSE OPACITY OF PAPER = ILLUMINANT C, ELREPHO TYPE

LAB CODE	SAMPLE E40 MEAN	COATED DULL 117 GRAMS PER SQUARE METER				SAMPLE J57 MEAN	PRINTING 94 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L182E	96.68	-.01	-.14	.08	.78	93.73	.18	1.03	.19	1.06	60J	Ø	L182E
L233F	96.75	.06	.55	.10	.97	93.54	-.01	-.05	.15	.82	60F	Ø	L233F
L244	96.52	-.17	-1.72	.11	1.13	93.24	-.31	-1.75	.19	1.04	60F	Ø	L244
L250T	96.74	.05	.45	.12	1.17	93.66	.11	.63	.24	1.29	60J	Ø	L250T
L251	96.69	-.00	-.02	.11	1.07	93.43	-.12	-.69	.22	1.22	60F	Ø	L251
L360	96.58	-.11	-1.13	.12	1.22	93.43	-.12	-.67	.21	1.15	60F	Ø	L360
L446	96.76	.07	.67	.08	.79	93.60	.05	.28	.10	.54	60J	Ø	L446
L575	96.83	.14	1.34	.09	.87	93.76	.22	1.22	.16	.88	60J	Ø	L575

GR. MEAN = 96.69 PERCENT GRAND MEAN = 93.55 PERCENT TEST DETERMINATIONS = 10
SD MEANS = .10 PERCENT SD OF MEANS = .18 PERCENT 6 LABS IN GRAND MEANS
AVERAGE SDR = .10 PERCENT AVERAGE SDR = .18 PERCENT

L176	82.87	-13.82	-136.08	.21	2.05	83.73	-9.82	-55.59	.05	.26	60Z	Ø	L176
L626	96.77	.08	.74	.19	1.94	92.97	-.56	-3.28	.14	.77	60Q	Ø	L626

TOTAL NUMBER OF LABORATORIES REPORTING = 10

Best values: E40 96.7 percent
J57 93.6 percent

OPACITY (PAPER BACKING) IN PERCENT
TAPPI SUGGESTED METHOD T519 OS=78, DIFFUSE OPACITY OF PAPER = ILLUMINANT C, ELREPHO TYPE

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		E40	J57	MAJOR	MINOR	R.SDR	VAR	
L176	*	82.87	83.73	-15.06	7.80	1.15	60Z	OPACITY (PAPER BACKING), MARTIN SWEETS
L244	Ø	96.52	93.24	-.35	.01	1.08	60F	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) NO TRAP
L350	Ø	96.58	93.43	-.16	.05	1.19	60P	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) NO TRAP
L182E	Ø	96.68	93.73	.15	.10	.92	60J	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) FILTER
L251	Ø	96.69	93.43	-.11	-.05	1.14	60F	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) NO TRAP
L250T	Ø	96.74	93.66	.12	.01	1.23	60J	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) FILTER
L233F	Ø	96.75	93.54	.02	-.05	.89	60P	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) NO TRAP
L446	Ø	96.76	93.60	.08	-.04	.66	60J	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) FILTER
L626	*	96.77	92.97	-.48	-.33	1.35	60Q	OPACITY (PAPER BACKING), PHOTOVOLT
L575	Ø	96.83	93.76	.25	-.02	.88	60J	OPACITY (PAPER BACKING), ZEISS ELREPHO, FMY=C(10) FILTER
GMEANS:		96.69	93.55			1.00		
		95% ELLIPSE:		.68	.18	WITH GAMMA = 62 DEGREES		

ANALYSIS T65-1 TABLE 1

DIRECTIONAL BLUE REFLECTANCE IN PERCENT

TAPPI STANDARD T452 GS-77, 'BRIGHTNESS'; MARTIN SWEETS (ACBT & GE) IS STANDARD FOR THIS ANALYSIS

LAB CODE	SAMPLE J37 MEAN	PRINTING 89 GRAMS PER SQUARE METER				SAMPLE J35 MEAN	PRINTING 94 GRAMS PER SQUARE METER				TEST D. ° 8		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L108	75.59	-.20	-.48	.04	.22	84.07	.10	.22	.18	1.30	65M	Ø	L108
L122	76.06	.27	.65	.16	1.01	83.81	-.16	-.37	.08	.59	65N	Ø	L122
L132	75.76	-.03	-.07	.09	.58	83.66	-.31	-.71	.09	.65	65N	Ø	L132
L158	76.22	.43	1.03	.32	1.99	84.40	.42	.95	.33	2.37	65N	Ø	L158
L176A	72.72	-3.07	-7.30	.13	.81	79.66	-4.31	-9.72	.27	1.90	65A	#	L176A
L190C	75.06	-.73	-1.73	.12	.75	83.95	-.03	-.06	.08	.54	65A	Ø	L190C
L210M	76.04	.25	.59	.12	.75	83.81	-.16	-.37	.11	.80	65M	Ø	L210M
L210N	75.55	-.24	-.57	.12	.76	85.09	1.11	2.50	3.56	25.29	65N	*	L210N
L211	75.34	-.45	-1.08	.16	1.01	82.84	-1.14	-2.57	.40	2.84	65N	Ø	L211
L225	76.56	.77	1.84	.27	1.69	84.14	.16	.36	.18	1.31	65N	Ø	L225
L243	75.24	-.55	-1.32	.11	.67	83.59	-.39	-.88	.04	.25	65A	Ø	L243
L259	75.64	-.15	-.36	.17	1.07	83.91	-.06	-.15	.12	.89	65M	Ø	L259
L275	75.61	-.18	-.42	.16	.98	83.74	-.24	-.54	.07	.53	65M	Ø	L275
L285	76.14	.35	.83	.17	1.07	84.65	.67	1.51	.23	1.61	65N	Ø	L285
L288	75.54	-.25	-.60	.18	1.12	83.84	-.14	-.32	.07	.53	65N	Ø	L288
L308	75.91	.12	.29	.11	.71	84.29	.31	.70	.10	.70	65N	Ø	L308
L315	75.60	-.19	-.45	.35	2.24	83.94	-.04	-.09	.07	.53	65N	Ø	L315
L317	75.29	-.50	-1.20	.22	1.41	83.86	-.11	-.26	.12	.84	65M	Ø	L317
L523	76.31	.52	1.24	.10	.63	84.11	.14	.30	.06	.46	65N	Ø	L523
L543	76.47	.68	1.63	.07	.45	83.81	-.16	-.37	.19	1.34	65M	Ø	L543
L565	75.87	.08	.20	.10	.65	84.04	.06	.14	.13	.92	65A	Ø	L565
L598	76.69	.90	2.14	.35	2.20	86.02	2.05	4.61	.38	2.70	65M	Ø	L598
GR. MEAN = 75.79 PERCENT		AVERAGE SDR = .16 PERCENT				GRAND MEAN = 83.98 PERCENT				TEST DETERMINATIONS = 8			
SD MEANS = .42 PERCENT						SD OF MEANS = .44 PERCENT				20 LABS IN GRAND MEANS			
L105	75.77	-.02	-.04	.18	1.16	84.65	.67	1.51	.05	.38	65T	+	L105
L176I	75.91	.12	.29	.16	.98	84.99	1.01	2.27	.06	.46	65I	+	L176I
L213	76.06	.27	.65	.11	.67	84.62	.65	1.46	.07	.50	65T	+	L213
L223	76.87	1.08	2.58	.18	1.11	95.89	1.91	4.30	.10	.70	65G	+	L223
L241	76.54	.75	1.79	.20	1.26	85.52	1.55	3.45	.10	.74	65I	+	L241
L249	77.12	1.33	3.18	.09	.56	84.22	.25	.56	.09	.63	65P	+	L249
L256	75.74	-.05	-.13	.21	1.31	83.94	-.04	-.09	.11	.75	65H	+	L256
L260	76.14	.35	.83	.13	.82	84.19	.21	.47	.12	.89	65P	+	L260
L278	78.12	2.33	5.56	.23	1.46	86.12	2.15	4.84	.23	1.64	65P	+	L278
L301	76.40	.61	1.45	.18	1.12	84.37	.40	.90	.09	.63	65G	+	L301
L312	78.00	2.21	5.26	.27	1.69	84.37	.40	.90	.44	3.15	65P	+	L312
L321	78.81	3.02	7.19	.26	1.64	86.81	2.84	6.39	.59	4.22	65P	+	L321
L328	76.95	1.16	2.76	.09	.59	83.85	-.13	-.29	.11	.76	65P	+	L328
L339	76.37	.58	1.39	.23	1.46	83.12	-.85	-1.92	.19	1.34	65P	+	L339
L380	78.87	3.08	7.34	.35	2.24	84.62	.65	1.46	.52	3.68	65P	+	L380
L388	75.50	-.29	-.69	.00	.00	83.75	-.23	-.51	.27	1.90	65P	+	L388
L562	81.00	5.21	12.40	.00	.00	86.00	2.02	4.56	.00	.00	65P	+	L562
L587	76.07	.28	.68	.10	.65	84.66	.69	1.54	.13	.92	65I	+	L587
L591	74.96	-.83	-1.98	.17	1.05	84.13	.15	.34	.10	.73	65H	+	L591
L626	77.97	2.18	5.20	.05	.29	86.12	2.15	4.84	.07	.50	65P	+	L626

TOTAL NUMBER OF LABORATORIES REPORTING = 42

Best values: J37 75.6 ± 0.8 percent
 J35 83.8 ± 0.9 percent

The following laboratories were omitted from the grand means because of extreme test results: 176A, 598

ANALYSIS T65-1 TABLE 2

DIRECTIONAL BLUE REFLECTANCE IN PERCENT


TAPPI STANDARD T452 0S-77, 'BRIGITNESS'; MARTIN SWEETS (ACBT & GE) IS STANDARD FOR THIS ANALYSIS

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY	TEST INSTRUMENT	CONDITIONS
		J37	J35	MAJOR	MINOR	R.SDR	VAR			
L176A	#	72.72	79.66	-5.28	-.41	1.35	65A	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (ACBT),	S=2
L591	*	74.96	84.13	-.42	.73	.89	65H	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER	
L190C	0	75.06	83.95	-.49	.54	.64	65A	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (ACBT),	S=2
L243	0	75.24	83.59	-.65	.17	.46	65A	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (ACBT),	S=2
L317	0	75.29	83.86	-.41	.31	1.13	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L211	0	75.34	82.84	-1.17	-.38	1.92	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L388	*	75.50	83.75	-.36	.08	.95	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L288	0	75.54	83.84	-.27	.10	.82	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L210N	*	75.55	85.09	.70	.90	13.02	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L108	0	75.59	84.07	-.06	.22	.76	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L315	0	75.60	83.94	-.15	.12	1.39	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L275	0	75.61	83.74	-.30	-.02	.76	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L259	0	75.64	83.91	-.15	.08	.98	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L256	*	75.74	83.94	-.06	.02	1.03	65H	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER	
L132	0	75.76	83.66	-.26	-.18	.61	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L105	*	75.77	84.65	.51	.44	.77	65T	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER D25D2M	
L565	0	75.87	84.04	.10	-.03	.79	65A	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (ACBT),	S=2
L1761	*	75.91	84.99	.85	.55	.72	65I	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER D25D2A	
L308	0	75.91	84.29	.32	.11	.71	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L210M	0	76.04	83.81	.03	-.30	.78	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L122	0	76.06	83.81	.05	-.31	.80	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L213	*	76.06	84.62	.67	.21	.59	65T	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER D25D2M	
L587	*	76.07	84.66	.71	.22	.79	65I	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER D25D2A	
L260	*	76.14	84.19	.38	-.13	.85	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L285	0	76.14	84.65	.74	.16	1.34	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L158	0	76.22	84.40	.60	-.06	2.18	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L523	0	76.31	84.11	.44	-.31	.54	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L339	*	76.37	83.12	-.28	-.99	1.40	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L301	*	76.40	84.37	.70	-.21	.88	65G	BLUE REFLECTANCE (DIRECTIONAL),	GARDNER	
L543	0	76.47	83.81	.31	-.63	.89	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L241	*	76.54	85.52	1.67	.42	1.00	65I	BLUE REFLECTANCE (DIRECTIONAL),	HUNTER D25D2A	
L225	0	76.55	84.14	.62	-.49	1.50	65N	BLUE REFLECTANCE (DIRECTIONAL),	DIANCO/MARTIN SWEETS,	S=4
L598	#	76.69	86.02	2.15	.62	2.45	65M	BLUE REFLECTANCE (DIRECTIONAL),	MARTIN SWEETS (GE),	S=1
L223	*	76.87	85.89	2.16	.39	.91	65G	BLUE REFLECTANCE (DIRECTIONAL),	GARDNER	
L328	*	76.95	83.85	.65	-.97	.67	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L249	*	77.12	84.22	1.05	-.87	.59	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L626	*	77.97	86.12	3.05	-.30	.40	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L312	*	78.00	84.37	1.72	-1.44	2.42	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L278	*	78.12	86.12	3.14	-.42	1.55	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L321	*	78.81	86.81	4.11	-.50	2.93	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L380	*	78.87	84.62	2.47	-1.95	2.96	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
L562	*	81.00	86.00	4.89	-2.70	.00	65P	BLUE REFLECTANCE (DIRECTIONAL),	PHOTOVOLT	
GMEANS:		75.79	83.98			1.00				
		95% ELLIPSE:		1.36	.98			WITH GAMMA = 50 DEGREES		

BLUE REFLECTANCE, DIRECTIONAL

SAMPLE J37 = 75.8 PERCENT


SAMPLE J35 = 84.0 PERCENT

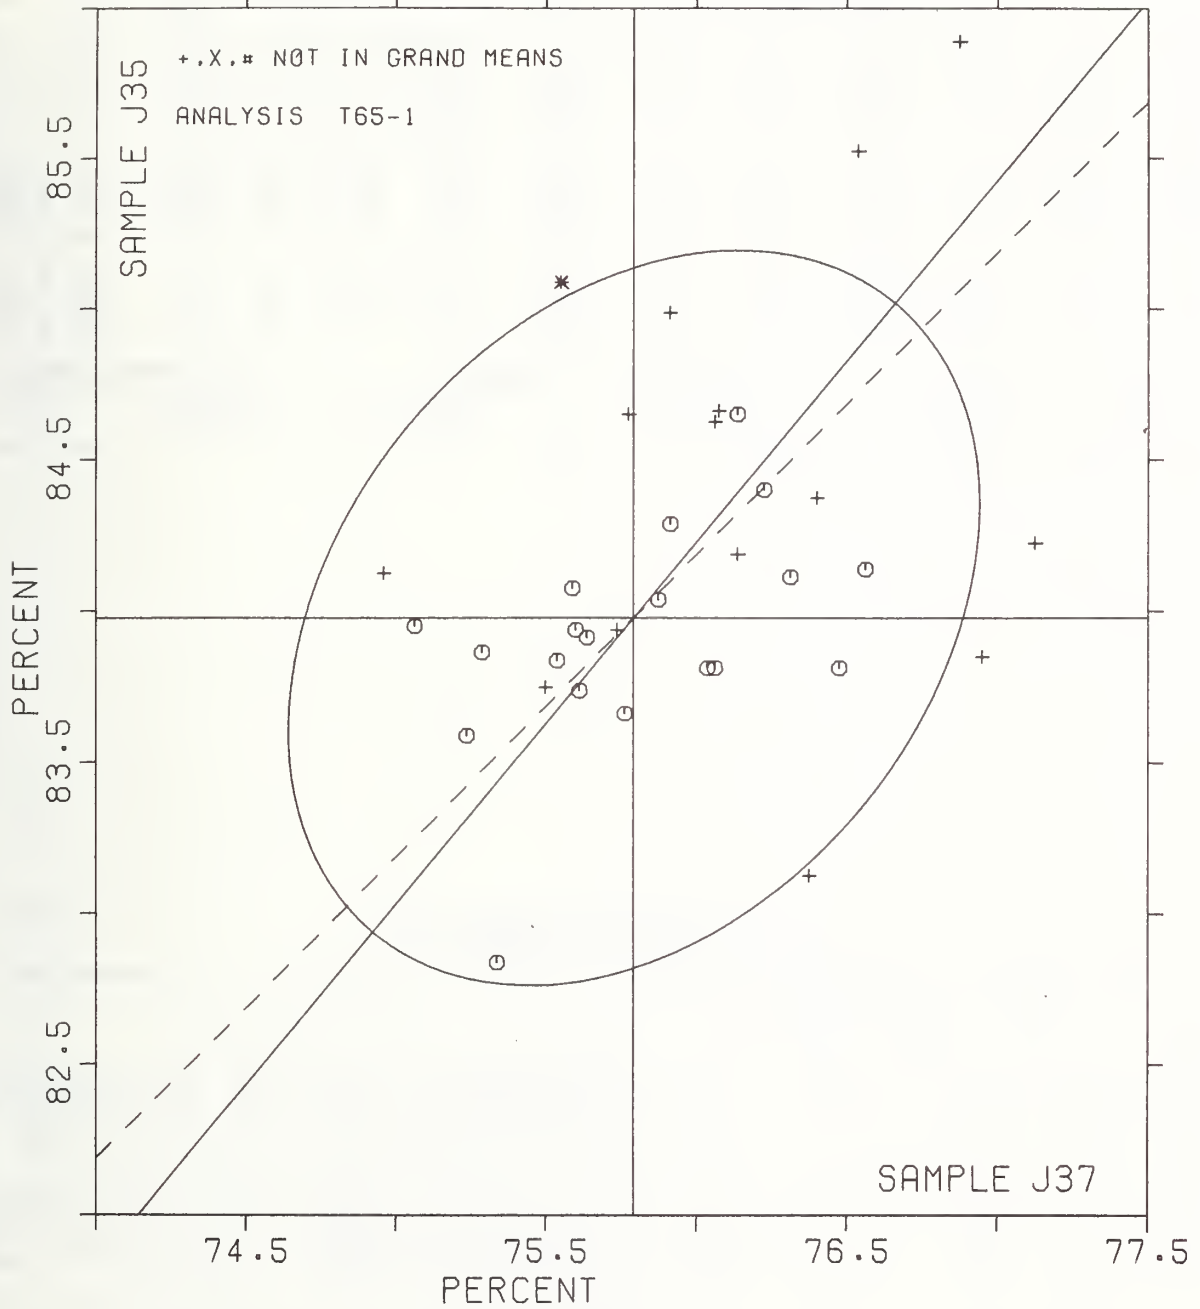

BLUE REFLECTANCE, DIFFUSE, WITH TRAP

SAMPLE J37 = 75.43 PERCENT


SAMPLE J35 = 84.43 PERCENT

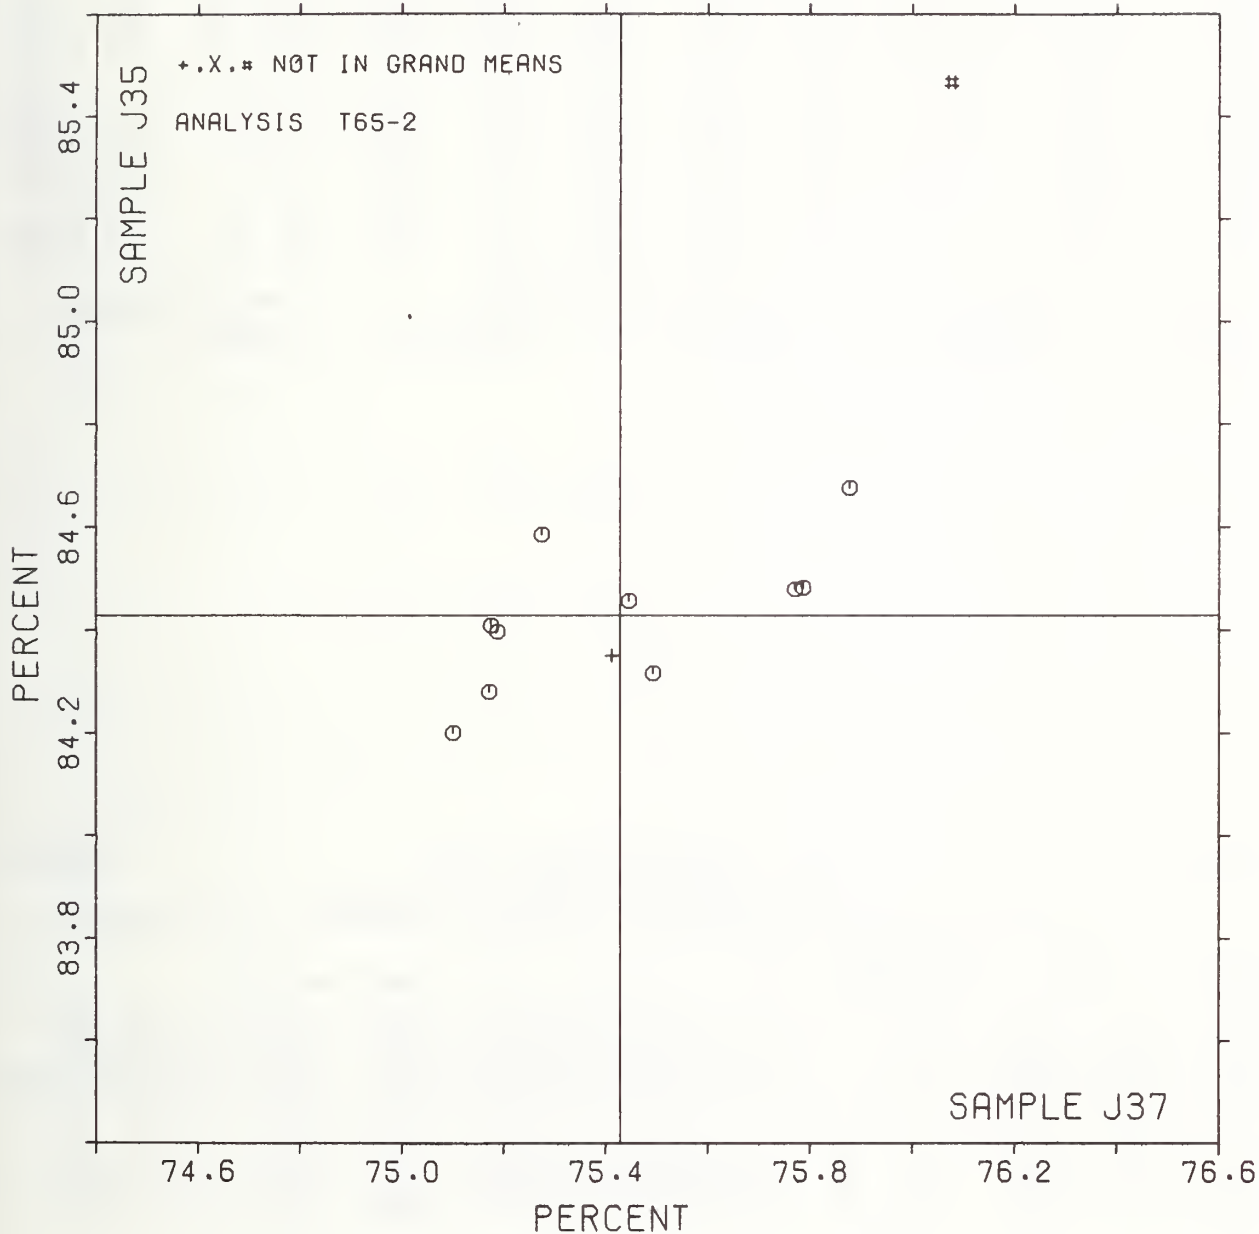

BLUE REFLECTANCE, DIFFUSE, NO TRAP

SAMPLE J37 = 76.6 PERCENT

SAMPLE J35 = 84.3 PERCENT

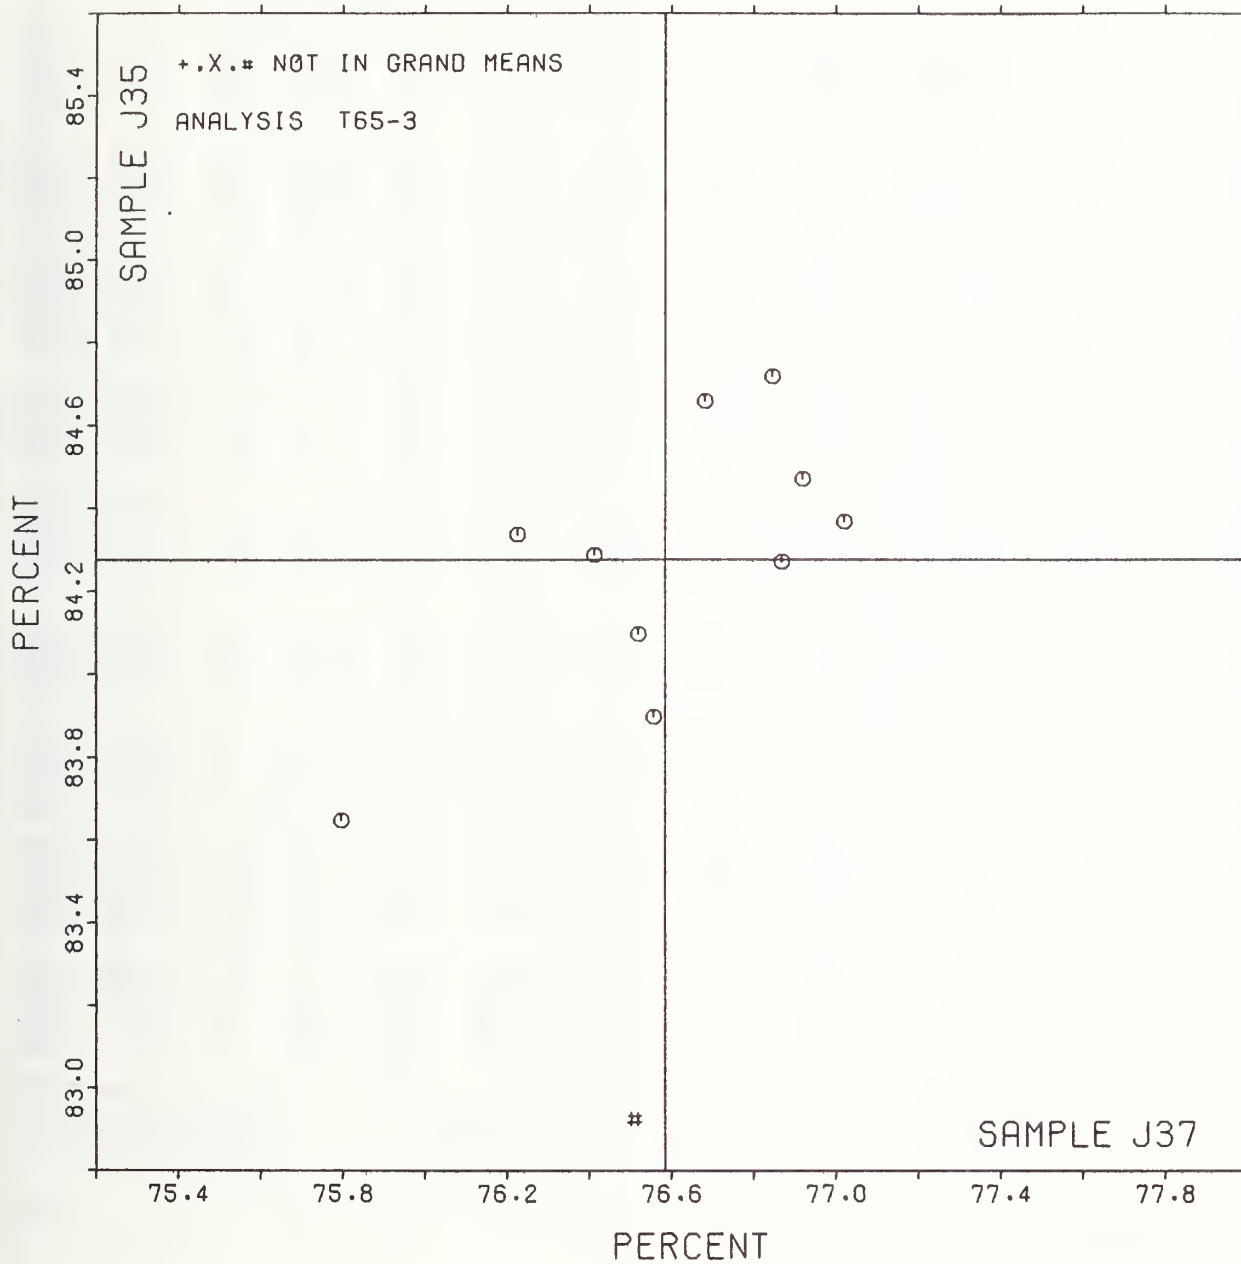

ANALYSIS T75-1 TABLE 1
SPECULAR GLOSS AT 75 DEGREES, IN GLOSS UNITS

TAPPI STANDARD T480 G8-78, SPECULAR GLOSS OF PAPER AND PAPERBOARD AT 75 DEGREES

LAB CODE	SAMPLE E58 MEAN	CAST COATED 211 GRAMS PER SQUARE METER				SAMPLE J20 MEAN	PRINTING 149 GRAMS PER SQUARE METER				TEST D. = 10			
		DEV	N. DEV	SDR	R. SDR		DEV	N. DEV	SDR	R. SDR	VAR	F	LAB	
L108	85.31	.99	.93	.27	.56	48.53	.85	.44	1.20	.87	75H	Ø	L108	
L121	83.21	-1.11	-1.04	.27	.57	46.71	-.97	-.50	.97	.70	75H	Ø	L121	
L122	83.24	-1.08	-1.01	.40	.83	46.50	-1.18	-.61	1.99	1.43	75H	Ø	L122	
L128	84.00	-.32	-.30	.47	.98	48.70	1.02	.53	1.25	.90	75G	Ø	L128	
L136	84.10	-.22	-.21	.23	.47	50.16	2.48	1.29	.93	.67	75G	Ø	L136	
L153	84.40	.08	.07	.77	1.61	50.20	2.52	1.31	1.16	.84	75G	Ø	L153	
L162	86.39	2.07	1.93	.26	.54	52.19	4.51	2.34	1.20	.87	75G	Ø	L162	
L166	88.40	4.08	3.81	1.35	2.81	51.50	3.82	1.98	1.08	.78	75B	X	L166	
L173A	86.10	1.78	1.66	.32	.66	46.90	-.78	-.41	1.60	1.15	75G	Ø	L173A	
L182	84.67	.35	.33	.49	1.02	45.84	-1.84	-.96	1.86	1.34	75H	Ø	L182	
L189	86.10	1.78	1.66	.74	1.54	50.50	2.82	1.46	.94	.68	75P	Ø	L189	
L190R	83.43	-.89	-.83	.39	.80	47.82	.14	.07	1.21	.87	75G	Ø	L190R	
L206	84.14	-.18	-.17	.29	.61	47.37	-.31	-.16	1.82	1.31	75H	Ø	L206	
L210	85.81	1.49	1.39	.40	.84	48.69	1.01	.52	1.94	1.40	75H	Ø	L210	
L211	83.48	-.84	-.78	.27	.55	48.43	.75	.39	1.60	1.16	75H	Ø	L211	
L213	83.88	-.44	-.41	.29	.61	47.20	-.48	-.25	1.83	1.32	75H	Ø	L213	
L223	84.94	.62	.58	.31	.64	47.18	-.50	-.26	1.29	.93	75H	Ø	L223	
L224	82.92	-1.40	-1.31	.32	.66	43.50	-4.18	-2.17	1.58	1.14	75H	Ø	L224	
L230	84.90	.58	.54	.32	.66	47.10	-.58	-.30	1.85	1.34	75H	Ø	L230	
L243	84.30	-.02	-.02	.48	1.01	47.00	-.68	-.35	1.49	1.07	75B	Ø	L243	
L251	83.15	-1.17	-1.09	.88	1.84	44.65	-3.03	-1.57	1.58	1.14	75G	Ø	L251	
L253P	84.54	.22	.21	.30	.62	47.97	.29	.15	1.10	.80	75G	Ø	L253P	
L255	84.60	.28	.26	.52	1.07	48.30	.62	.32	1.42	1.02	75H	Ø	L255	
L256	84.08	-.24	-.22	.36	.76	47.40	-.28	-.15	1.83	1.32	75H	Ø	L256	
L259	83.54	-.78	-.73	.34	.71	47.53	-.15	-.08	1.37	.99	75H	Ø	L259	
L262	85.20	.88	.82	.42	.88	50.50	2.82	1.46	.97	.70	75K	Ø	L262	
L278	84.41	.09	.08	.24	.50	49.88	2.20	1.14	1.57	1.13	75G	Ø	L278	
L279	83.10	-1.22	-1.14	.32	.66	46.30	-1.38	-.72	1.16	.84	75G	Ø	L279	
L291	83.27	-1.05	-.98	.21	.44	44.33	-3.35	-1.74	1.24	.89	75H	Ø	L291	
L301	83.83	-.49	-.46	.44	.91	47.03	-.65	-.34	1.39	1.00	75H	Ø	L301	
L315	85.00	.68	.64	.94	1.96	45.40	-2.28	-1.18	1.43	1.03	75G	Ø	L315	
L317	86.25	1.93	1.80	.50	1.04	46.26	-1.42	-.74	1.14	.83	75H	Ø	L317	
L321	96.65	12.33	11.52	3.24	6.75	54.10	6.42	3.33	.84	.61	75G	#	L321	
L323	83.71	-.61	-.57	.40	.84	46.64	-1.04	-.54	1.16	.84	75H	Ø	L323	
L328	88.43	4.11	3.84	.36	.75	47.46	-.22	-.12	1.96	1.41	75H	X	L328	
L339	86.30	1.98	1.85	2.00	4.17	50.65	2.97	1.54	1.00	.72	75P	Ø	L339	
L349	85.84	1.52	1.42	.58	1.20	48.52	.64	.33	1.57	1.13	75H	Ø	L349	
L388	82.90	-1.42	-1.33	1.31	2.72	50.05	2.37	1.23	1.61	1.16	75P	Ø	L388	
L396	83.40	-.92	-.86	.52	1.07	48.80	1.12	.58	1.48	1.06	75G	Ø	L396	
L456	83.93	-.39	-.36	.22	.45	46.89	-.79	-.41	1.43	1.03	75H	Ø	L456	
L483	79.33	-4.99	-4.66	1.83	3.82	45.23	-2.45	-1.27	1.87	1.35	75H	X	L483	
L574	81.90	-2.42	-2.26	.57	1.18	45.50	-2.18	-1.13	.85	.61	75G	Ø	L574	
L583	84.44	.12	.11	.36	.76	47.02	-.66	-.34	.64	.46	75H	Ø	L583	
L587	84.80	.48	.45	.63	1.32	50.70	3.02	1.57	1.49	1.08	75H	Ø	L587	
L592	83.73	-.59	-.55	.33	.69	45.08	-2.60	-1.35	1.35	.98	75H	Ø	L592	
L643	84.19	-.13	-.12	.50	1.04	46.92	-.76	-.40	1.74	1.26	75H	Ø	L643	
GR. MEAN	84.32	GLOSS UNITS				GRAND MEAN	47.68	GLOSS UNITS				TEST DETERMINATIONS = 10		
SD MEANS	1.07	GLOSS UNITS				SD OF MEANS	1.93	GLOSS UNITS				42 LABS IN GRAND MEANS		
		AVERAGE SDR = .48						AVERAGE SDR = 1.39				GLOSS UNITS		
L250	87.70	3.38	3.16	.95	1.97	47.70	.02	.01	.67	.49	75Q	Ø	L250	
L288	83.13	-1.19	-1.11	.07	.14	47.29	-.39	-.20	1.36	.98	75I	Ø	L288	
TOTAL NUMBER OF LABORATORIES REPORTING = 48														

Best values: E58 84 ± 1 gloss units
J20 47 ± 3 gloss units

The following laboratories were omitted from the grand means because of extreme test results: 321


ANALYSIS T75-1 TABLE 2
SPECULAR GLOSS AT 75 DEGREES, IN GLOSS UNITS

TAPPI STANDARD T480 68-78, SPECULAR GLOSS OF PAPER AND PAPERBOARD AT 75 DEGREES

LAB CODE	P	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		E58	J20	MAJOR	MINOR	R. SDR	VAR	
L483	X	79.33	45.23	-3.93	3.93	2.58	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L574	Ø	81.90	45.50	-2.85	1.58	.90	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L388	Ø	82.90	50.05	1.78	2.11	1.94	75P	SPECULAR GLOSS (75 DEGREE), PHOTOVOLT
L224	Ø	82.92	43.50	-4.41	-0.03	.90	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L279	Ø	83.10	46.30	-1.70	.71	.75	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L288	*	83.13	47.29	-.76	1.00	.56	75I	SPECULAR GLOSS (75 DEGREE), HUNTER, 20 C. 65% RH
L251	Ø	83.15	44.65	-3.25	.13	1.49	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L121	Ø	83.21	46.71	-1.28	.74	.63	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L122	Ø	83.24	46.50	-1.47	.64	1.13	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L291	Ø	83.27	44.33	-3.51	-.09	.67	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L396	Ø	83.40	48.80	.76	1.23	1.07	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L190R	Ø	83.43	47.82	-.16	.89	.84	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L211	Ø	83.48	48.43	.44	1.04	.85	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L259	Ø	83.54	47.53	-.40	.69	.85	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L323	Ø	83.71	46.64	-1.18	.24	.84	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L592	Ø	83.73	45.08	-2.65	-.28	.84	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L301	Ø	83.83	47.03	-.78	.25	.96	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L213	Ø	83.88	47.20	-.60	.26	.96	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L456	Ø	83.93	46.89	-.88	.11	.74	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L128	Ø	84.00	48.70	.86	.63	.54	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L256	Ø	84.08	47.40	-.34	.14	1.04	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L136	Ø	84.10	50.16	2.27	1.01	.57	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L206	Ø	84.14	47.37	-.35	.07	.96	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L643	Ø	84.19	46.92	-.76	-.12	1.15	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L243	Ø	84.30	47.00	-.65	-.20	1.04	75B	SPECULAR GLOSS (75 DEGREE), BAUSCH * LOMB
L153	Ø	84.40	50.20	2.41	.74	1.22	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L278	Ø	84.41	49.88	2.11	.62	.82	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L583	Ø	84.44	47.02	-.59	-.33	.61	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L253P	Ø	84.54	47.97	.34	-.12	.71	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L255	Ø	84.60	48.30	.68	-.07	1.05	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L182	Ø	84.67	45.84	-1.63	-.93	1.18	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L587	Ø	84.80	50.70	3.01	.52	1.20	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L230	Ø	84.90	47.10	-.36	-.74	1.00	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L223	Ø	84.94	47.18	-.27	-.75	.78	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L315	Ø	85.00	45.40	-1.94	-1.38	1.50	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L262	Ø	85.20	50.50	2.95	.08	.79	75K	SPECULAR GLOSS (75 DEGREE), GAERTNER (K-C TYPE)
L108	Ø	85.31	48.53	1.12	-.66	.71	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L210	Ø	85.81	48.69	1.44	-1.08	1.12	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L349	Ø	85.84	48.32	1.10	-1.23	1.17	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L173A	Ø	86.10	46.90	-.16	-1.94	.90	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L189	Ø	86.10	50.50	3.24	-.77	1.11	75P	SPECULAR GLOSS (75 DEGREE), PHOTOVOLT
L317	Ø	86.25	46.26	-.72	-2.29	.93	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L339	Ø	86.30	50.65	3.45	-.91	2.45	75P	SPECULAR GLOSS (75 DEGREE), PHOTOVOLT
L162	Ø	86.39	52.19	4.94	-.50	.70	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
L250	*	86.70	47.70	1.11	-3.19	1.23	75Q	SPECULAR GLOSS (75 DEGREE), PHOTOVOLT, 20 C, 65% RH
L166	X	88.40	51.50	4.93	-2.63	1.79	75B	SPECULAR GLOSS (75 DEGREE), BAUSCH * LOMB
L328	X	88.43	47.46	1.12	-3.96	1.08	75H	SPECULAR GLOSS (75 DEGREE), HUNTER
L321	#	96.65	54.10	10.06	-9.60	3.68	75G	SPECULAR GLOSS (75 DEGREE), GARDNER
GMEANS:		84.32	47.68			1.00		
		95% ELLIPSE:		5.18	2.31	WITH GAMMA * 71 DEGREES		

SPECULAR GLOSS, 75 DEGREE

SAMPLE E58 = 84.3 GLOSS UNITS SAMPLE J20 = 47.7 GLOSS UNITS

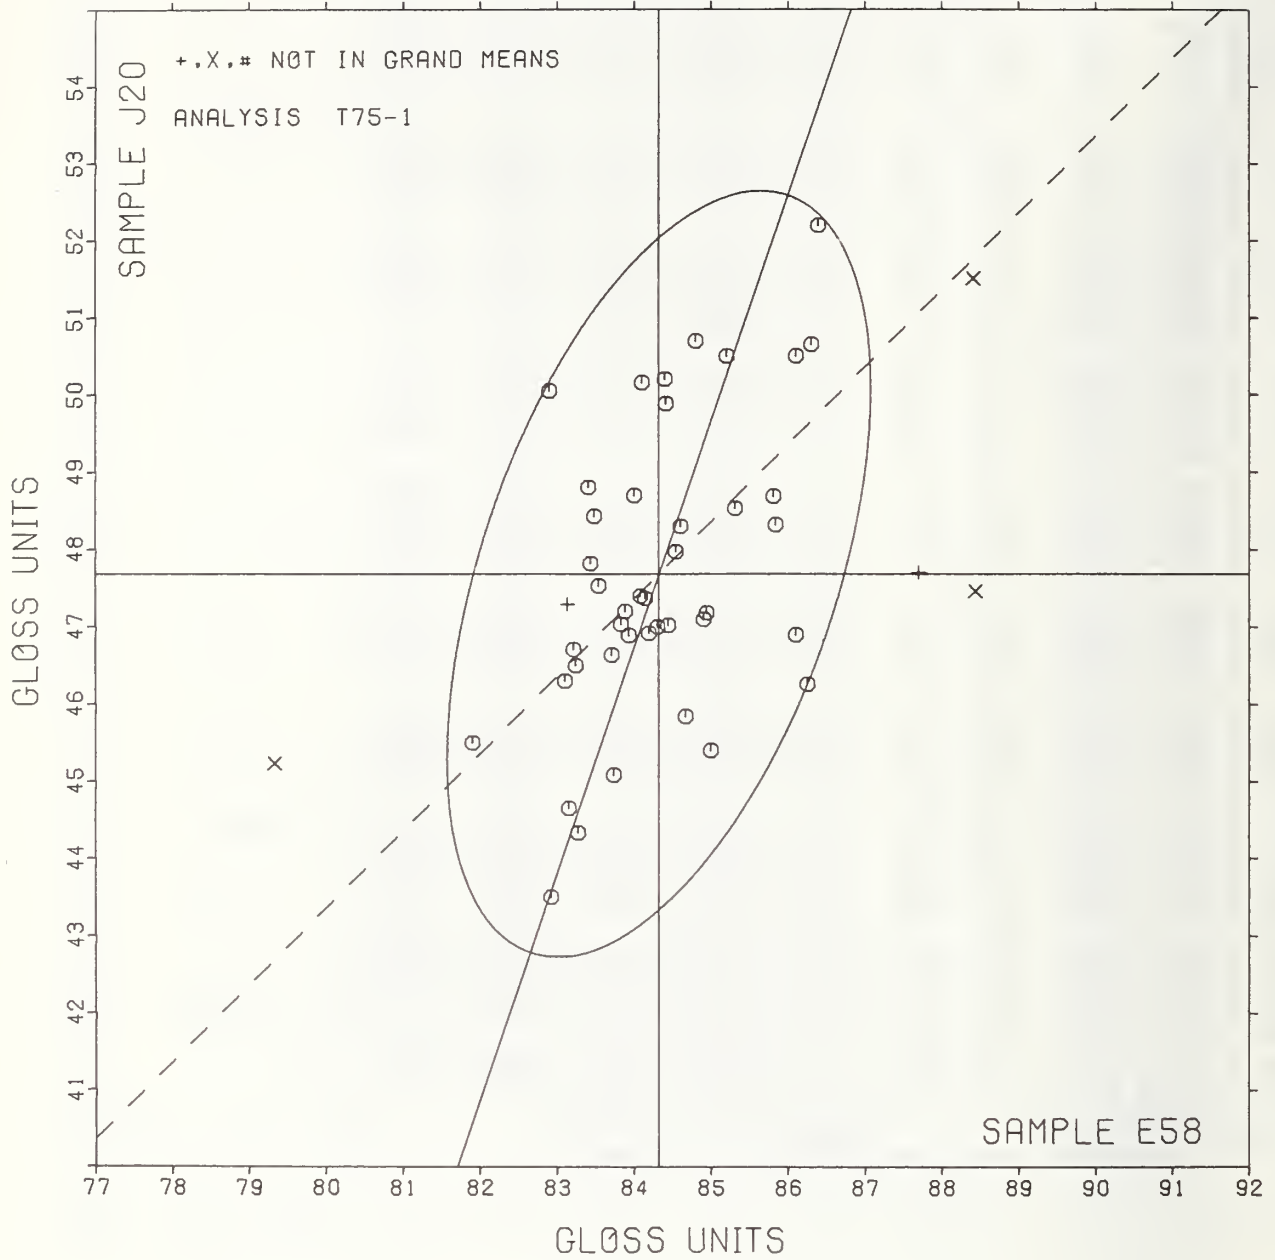

TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T90=1 TABLE 1
THICKNESS (CALIPER), THOUSANDTHS OF AN INCH
TAPPI STANDARD T411 GS=76

LAB CODE	SAMPLE J63 MEAN	PRINTING 102 GRAMS PER SQUARE METER				SAMPLE B28 MEAN	BAG 83 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N.DEV	SDR	R.SDR		DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L105	5.283	.005	.06	.038	.73	5.503	-.003	-.03	.113	1.12	90Q	0	L105
L118	5.292	.014	.17	.037	.71	5.623	.117	1.03	.059	.59	90V	0	L118
L122	5.235	-.043	-.50	.035	.68	5.565	.059	.52	.194	1.92	90V	0	L122
L123F	5.445	.167	1.96	.055	1.06	5.610	.104	.91	.122	1.21	90F	0	L123F
L125	5.302	.024	.28	.036	.70	5.618	.112	.98	.072	.71	90T	0	L125
L128	5.220	-.058	-.68	.023	.45	5.430	-.076	-.67	.088	.87	90T	0	L128
L131	5.410	.132	1.55	.032	.61	5.690	.184	1.62	.088	.87	90T	0	L131
L139	5.320	.042	.50	.048	.93	5.530	.024	.21	.134	1.32	90T	0	L139
L141	5.108	-.170	-2.00	.336	6.48	5.344	-.162	-1.43	.095	.94	90T	0	L141
L153	5.353	.075	.88	.051	.99	5.447	-.055	-.52	.101	1.00	90T	0	L153
L158	5.330	.052	.61	.035	.67	5.640	.134	1.18	.077	.77	90T	0	L158
L159	5.309	.031	.37	.047	.91	5.491	-.015	-.14	.079	.78	90T	0	L159
L162	5.258	-.020	-.23	.041	.79	5.509	.003	.02	.068	.67	90D	0	L162
L166	5.288	.010	.12	.030	.57	5.529	.023	.20	.119	1.18	90T	0	L166
L173B	5.410	.132	1.55	.032	.61	5.630	.124	1.09	.116	1.15	90F	0	L173B
L174	5.320	.042	.50	.063	1.22	5.520	.014	.12	.140	1.38	90T	0	L174
L182	5.232	-.046	-.53	.055	1.06	5.378	-.128	-1.13	.104	1.03	90L	0	L182
L190C	5.240	-.038	-.44	.052	1.00	5.420	-.086	-.76	.103	1.02	90T	0	L190C
L203A	5.250	-.028	-.33	.071	1.36	5.700	.194	1.71	.189	1.86	90T	*	L203A
L203C	5.340	.062	.73	.052	1.00	5.540	.034	.30	.117	1.16	90T	0	L203C
L213	5.330	.052	.61	.048	.93	5.570	.064	.56	.082	.81	90T	0	L213
L223	5.354	.076	.89	.035	.68	5.684	.178	1.57	.078	.77	90V	0	L223
L228	5.330	.052	.61	.048	.93	5.500	-.006	-.06	.163	1.61	90T	0	L228
L233	5.300	.022	.26	.044	.85	5.401	-.105	-.93	.109	1.08	90Q	0	L233
L238A	5.284	.006	.07	.044	.85	5.570	.064	.56	.078	.78	90T	0	L238A
L241	5.165	-.113	-1.33	.058	1.12	5.400	-.106	-.94	.158	1.56	90T	0	L241
L249	5.300	.022	.26	.050	.96	5.499	-.007	-.07	.101	1.00	90T	0	L249
L259	5.324	.046	.54	.041	.78	5.525	.019	.16	.129	1.27	90T	0	L259
L260	5.279	.001	.01	.022	.42	5.503	-.003	-.03	.100	.99	90T	0	L260
L261	5.395	.117	1.38	.064	1.24	5.570	.064	.56	.106	1.05	90T	0	L261
L262	5.265	-.013	-.15	.053	1.02	5.540	.034	.30	.070	.69	90T	0	L262
L285	5.170	-.108	-1.27	.067	1.30	5.380	-.126	-1.12	.123	1.22	90T	0	L285
L291	5.395	.117	1.38	.044	.84	5.665	.159	1.40	.075	.74	90T	0	L291
L297	5.270	-.008	-.09	.026	.50	5.585	.079	.69	.106	1.04	90T	0	L297
L305	5.175	-.103	-1.21	.082	1.59	5.180	-.326	-2.88	.193	1.91	90T	*	L305
L309	5.240	-.038	-.44	.052	1.00	5.440	-.066	-.59	.117	1.16	90T	0	L309
L318	5.210	-.068	-.80	.066	1.27	5.495	-.011	-.10	.172	1.70	90T	0	L318
L323	5.187	-.091	-1.07	.043	.82	5.474	-.032	-.29	.058	.58	90T	0	L323
L324	5.300	.022	.26	.053	1.02	5.520	.014	.12	.116	1.15	90T	0	L324
L326	5.425	.147	1.73	.049	.94	5.545	.039	.34	.086	.85	90T	0	L326
L328	5.280	.002	.03	.063	1.22	5.530	.024	.21	.116	1.15	90T	0	L328
L331	5.303	.025	.30	.046	.88	5.463	-.043	-.38	.137	1.35	90T	0	L331
L339	5.200	-.078	-.91	.047	.91	5.580	.074	.65	.079	.78	90T	0	L339
L341	5.378	.100	1.18	.024	.46	5.696	.190	1.67	.108	1.07	90T	0	L341
L352	5.332	.054	.64	.030	.58	5.602	.096	.84	.147	1.45	90Q	0	L352
L356	5.163	-.115	-1.35	.029	.55	5.418	-.088	-.78	.077	.77	90T	0	L356
L358	5.273	-.005	-.06	.059	1.13	5.497	-.009	-.08	.074	.73	90T	0	L358
L372	5.280	.002	.03	.042	.81	5.450	-.056	-.50	.071	.70	90T	0	L372
L376	5.220	-.058	-.68	.042	.81	5.480	-.026	-.23	.079	.78	90T	0	L376
L380	5.260	-.018	-.21	.039	.76	5.520	.014	.12	.103	1.02	90T	0	L380
L382	5.390	.112	1.32	.032	.61	5.640	.134	1.18	.097	.96	90T	0	L382
L390	5.170	-.108	-1.27	.116	2.24	5.280	-.226	-2.00	.092	.91	90T	0	L390
L556	5.060	-.218	-2.56	.024	.46	5.254	-.252	-2.23	.103	1.02	90T	*	L556
L557	5.265	-.013	-.15	.063	1.21	5.365	-.141	-1.25	.118	1.17	90T	0	L557
L558	5.330	.052	.61	.048	.93	5.750	.244	2.15	.097	.96	90T	*	L558
L559	5.318	.040	.47	.042	.81	5.535	.029	.25	.068	.67	90T	0	L559
L560	5.300	.022	.26	.067	1.29	5.450	-.056	-.50	.071	.70	90T	0	L560
L561	5.260	-.018	-.21	.084	1.63	5.450	-.056	-.50	.127	1.25	90T	0	L561
L567	5.376	.098	1.15	.048	.92	5.563	.057	.50	.053	.52	90V	0	L567
L574	5.154	-.124	-1.45	.049	.95	5.432	-.074	-.66	.105	1.04	90V	0	L574
L575	5.199	-.079	-.93	.047	.92	5.367	-.139	-1.23	.086	.85	90T	0	L575
L581	5.365	.087	1.02	.034	.65	5.600	.094	.83	.058	.57	90T	0	L581
L587	5.250	-.028	-.33	.053	1.02	5.440	-.066	-.59	.084	.83	90T	0	L587
L626	5.012	-.266	-3.12	.048	.93	5.288	-.218	-1.93	.090	.89	90T	*	L626

GR. MEAN = 5.278 MILS
SD MEANS = .085 MILS

GRAND MEAN = 5.506 MILS
SD OF MEANS = .113 MILS

TEST DETERMINATIONS = 10
64 LABS IN GRAND MEANS

AVERAGE SDR = .052 MILS

AVERAGE SDR = .101 MILS

GR. MEAN = 134.06 MICROMETER

GRAND MEAN = 139.86 MICROMETER

TAPPI COLLABORATIVE REFERENCE PROGRAM
 ANALYSIS T90-1 TABLE 1
 THICKNESS (CALIPER), THOUSANDTHS OF AN INCH
 TAPPI STANDARD T411 OS-76

LAB CODE	SAMPLE J63 MEAN	PRINTING 102 GRAMS PER SQUARE METER				R.SDR	SAMPLE B28 MEAN	BAG 83 GRAMS PER SQUARE METER				TEST D. = 10		
		DEV	N.DEV	SDR	R.SDR			DEV	N.DEV	SDR	R.SDR	VAR	F	LAB
L185	5.347	.069	.81	.078	1.51	5.332	-.174	-1.54	.048	.48	90B	*	L185	
L203B	5.070	-.208	-2.44	.106	2.04	5.200	-.306	-2.70	.211	2.08	90C	*	L203B	
L243	5.325	.047	.55	.049	.94	5.495	-.011	-.10	.130	1.29	90S	*	L243	
L251	5.193	-.085	-1.00	.031	.60	5.358	-.148	-1.31	.053	.52	90W	*	L251	
L322	5.170	-.108	-1.27	.149	2.88	5.550	.044	.38	.242	2.39	90U	*	L322	
L330	5.380	.102	1.20	.132	2.54	5.770	.264	2.33	.206	2.03	90U	*	L330	
L344	5.590	.112	1.32	.057	1.10	5.640	.134	1.18	.151	1.49	90U	*	L344	
L396M	5.090	-.188	-2.21	.057	1.10	4.800	-.706	-6.23	.105	1.04	90S	*	L396M	
L484	5.283	.006	.07	.045	.86	5.394	-.113	-1.00	.072	.71	90E	*	L484	
L562	5.295	.017	.20	.069	1.32	5.410	-.096	-.85	.081	.80	90C	*	L562	
L576	5.249	-.029	-.34	.058	1.12	4.878	-.628	-5.55	.071	.70	90C	*	L576	
L616	5.000	-.278	-3.26	.000	.00	5.130	-.376	-3.32	.164	1.62	90C	*	L616	
TOTAL NUMBER OF LABORATORIES REPORTING =													76	

Best values: J63 5.28 ± 0.13 mils
 B28 5.50 ± 0.19 mils

TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T90-1 TABLE 2
THICKNESS (CALIPER), THOUSANDTHS OF AN INCH
TAPPI STANDARD T411 6S-76

LAB CODE	P	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---	CONDITIONS
		J63	B28	MAJOR	MINOR	R.SDR	VAR		
L616	*	5.000	5.130	-.468	.018	.81	90C	THICKNESS (CALIPER),	CADY, HAND DRIVEN
L626	*	5.012	5.288	-.330	.097	.91	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L556	*	5.060	5.254	-.331	.038	.74	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L203B	*	5.070	5.200	-.370	-.000	2.06	90C	THICKNESS (CALIPER),	CADY, HAND DRIVEN
L396M	*	5.090	4.800	-.690	-.242	1.07	90S	THICKNESS (CALIPER),	SCHÖPPER, HAND DRIVEN
L141	Ø	5.108	5.344	-.230	.049	3.71	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L574	Ø	5.154	5.432	-.131	.061	1.00	90V	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN, DIGITIZED
L356	Ø	5.163	5.418	-.138	.045	.66	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L241	Ø	5.165	5.400	-.151	.033	1.34	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L322	*	5.170	5.550	-.025	.114	2.64	90U	THICKNESS (CALIPER),	TMI, HAND DRIVEN
L390	Ø	5.170	5.280	-.248	-.038	1.57	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L285	Ø	5.170	5.380	-.165	.018	1.26	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L305	*	5.175	5.180	-.328	-.098	1.75	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L323	Ø	5.187	5.474	-.078	.057	.70	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L251	*	5.193	5.358	-.170	-.013	.56	90W	THICKNESS (CALIPER),	L * W, MOTOR DRIVEN, 20 C, 65% RH
L575	Ø	5.199	5.367	-.160	-.013	.88	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L339	Ø	5.200	5.580	.017	.106	.84	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L318	Ø	5.210	5.495	-.048	.050	1.49	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L376	Ø	5.220	5.480	-.054	.033	.80	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L128	Ø	5.220	5.430	-.096	.005	.66	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L182	Ø	5.232	5.378	-.132	-.035	1.04	90L	THICKNESS (CALIPER),	L * W, MOTOR DRIVEN
L122	Ø	5.235	5.565	.024	.068	1.30	90V	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN, DIGITIZED
L190C	Ø	5.240	5.420	-.093	-.017	1.01	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L309	Ø	5.240	5.440	-.076	-.006	1.08	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L576	*	5.249	4.878	-.536	-.329	.91	90C	THICKNESS (CALIPER),	CADY, HAND DRIVEN
L587	Ø	5.250	5.440	-.071	-.014	.93	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L203A	*	5.250	5.700	.144	.132	1.61	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L162	Ø	5.258	5.509	-.009	.018	.73	90D	THICKNESS (CALIPER),	CADY, MOTOR DRIVEN
L561	Ø	5.260	5.450	-.057	-.017	1.44	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L380	Ø	5.260	5.520	.001	.022	.89	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L557	Ø	5.265	5.365	-.124	-.069	1.19	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L262	Ø	5.265	5.540	.021	.029	.86	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L297	Ø	5.270	5.585	.061	.051	.77	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L358	Ø	5.273	5.497	-.011	-.001	.93	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L260	Ø	5.279	5.503	-.002	-.003	.71	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L372	Ø	5.280	5.450	-.045	-.034	.76	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L328	Ø	5.280	5.530	.021	.011	1.18	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L105	Ø	5.283	5.503	.000	-.006	.92	90Q	THICKNESS (CALIPER),	EMVECO, MOTOR DRIVEN
L484	*	5.283	5.394	-.090	-.068	.79	90E	THICKNESS (CALIPER),	SCHÖPPER, HAND DRIVEN
L238A	Ø	5.284	5.570	.056	.031	.81	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L166	Ø	5.288	5.529	.024	.004	.88	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L118	Ø	5.292	5.623	.104	.054	.65	90V	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN, DIGITIZED
L562	*	5.295	5.410	-.070	-.068	1.06	90C	THICKNESS (CALIPER),	CADY, HAND DRIVEN
L249	Ø	5.300	5.499	.006	-.023	.58	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L324	Ø	5.300	5.520	.024	-.011	1.08	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L560	Ø	5.300	5.450	-.034	-.050	.99	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L233	Ø	5.300	5.401	-.075	-.078	.96	90Q	THICKNESS (CALIPER),	EMVECO, MOTOR DRIVEN
L125	Ø	5.302	5.618	.106	.043	.71	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L331	Ø	5.303	5.463	-.022	-.045	1.12	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L159	Ø	5.309	5.491	.005	-.034	.84	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L559	Ø	5.318	5.535	.046	-.017	.74	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L174	Ø	5.320	5.520	.035	-.027	1.30	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L139	Ø	5.320	5.530	.043	-.022	1.13	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L259	Ø	5.324	5.525	.041	-.028	1.03	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L243	*	5.325	5.495	.017	-.045	1.11	90S	THICKNESS (CALIPER),	SCHÖPPER, HAND DRIVEN
L228	Ø	5.330	5.500	.024	-.047	1.27	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L213	Ø	5.330	5.570	.082	-.007	.87	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L558	*	5.330	5.750	.231	.094	.95	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L158	Ø	5.330	5.640	.140	.032	.72	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L352	Ø	5.332	5.602	.109	.009	1.02	90Q	THICKNESS (CALIPER),	EMVECO, MOTOR DRIVEN
L203C	Ø	5.340	5.540	.063	-.033	1.08	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L185	*	5.347	5.332	-.105	-.155	.99	90B	THICKNESS (CALIPER),	ANTHOR, HAND DRIVEN
L153	Ø	5.353	5.447	-.007	-.096	.99	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN
L223	Ø	5.354	5.684	.190	.037	.72	90V	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN, DIGITIZED
L581	Ø	5.365	5.600	.126	-.020	.61	90T	THICKNESS (CALIPER),	TMI, MOTOR DRIVEN

TAPPI COLLABORATIVE REFERENCE PROGRAM
ANALYSIS T90-1 TABLE 2
THICKNESS (CALIPER), THOUSANDTHS OF AN INCH
TAPPI STANDARD T411 6S-76

LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		J63	B28	MAJOR	MINOR	R.SDR	VAR	
L567	Ø	5.376	5.563	.102	-.049	.72	90V	THICKNESS (CALIPER), TMI, MOTOR DRIVEN, DIGITIZED
L341	Ø	5.378	5.696	.213	.024	.76	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L330	*	5.380	5.770	.275	.064	2.29	90U	THICKNESS (CALIPER), TMI, HAND DRIVEN
L382	Ø	5.390	5.640	.174	-.018	.78	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L344	*	5.390	5.640	.174	-.018	1.29	90U	THICKNESS (CALIPER), TMI, HAND DRIVEN
L261	Ø	5.395	5.570	.118	-.061	1.14	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L291	Ø	5.395	5.665	.197	-.008	.79	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L173B	Ø	5.410	5.630	.176	-.040	.88	90F	THICKNESS (CALIPER), FEDERAL, MOTOR DRIVEN
L131	Ø	5.410	5.690	.226	-.006	.74	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L326	Ø	5.425	5.545	.115	-.100	.90	90T	THICKNESS (CALIPER), TMI, MOTOR DRIVEN
L123F	Ø	5.445	5.610	.180	-.080	1.13	90F	THICKNESS (CALIPER), FEDERAL, MOTOR DRIVEN
GMEANS:		5.278	5.506			1.00		
		95% ELLIPSE:		.336	.125			WITH GAMMA = 55 DEGREES


THICKNESS (CALIPER)

SAMPLE J63 = 5.28 MILS

SAMPLE B28 = 5.51 MILS

SAMPLE J63 = 134.1 MICRØMETER

SAMPLE B28 = 139.9 MICRØMETER

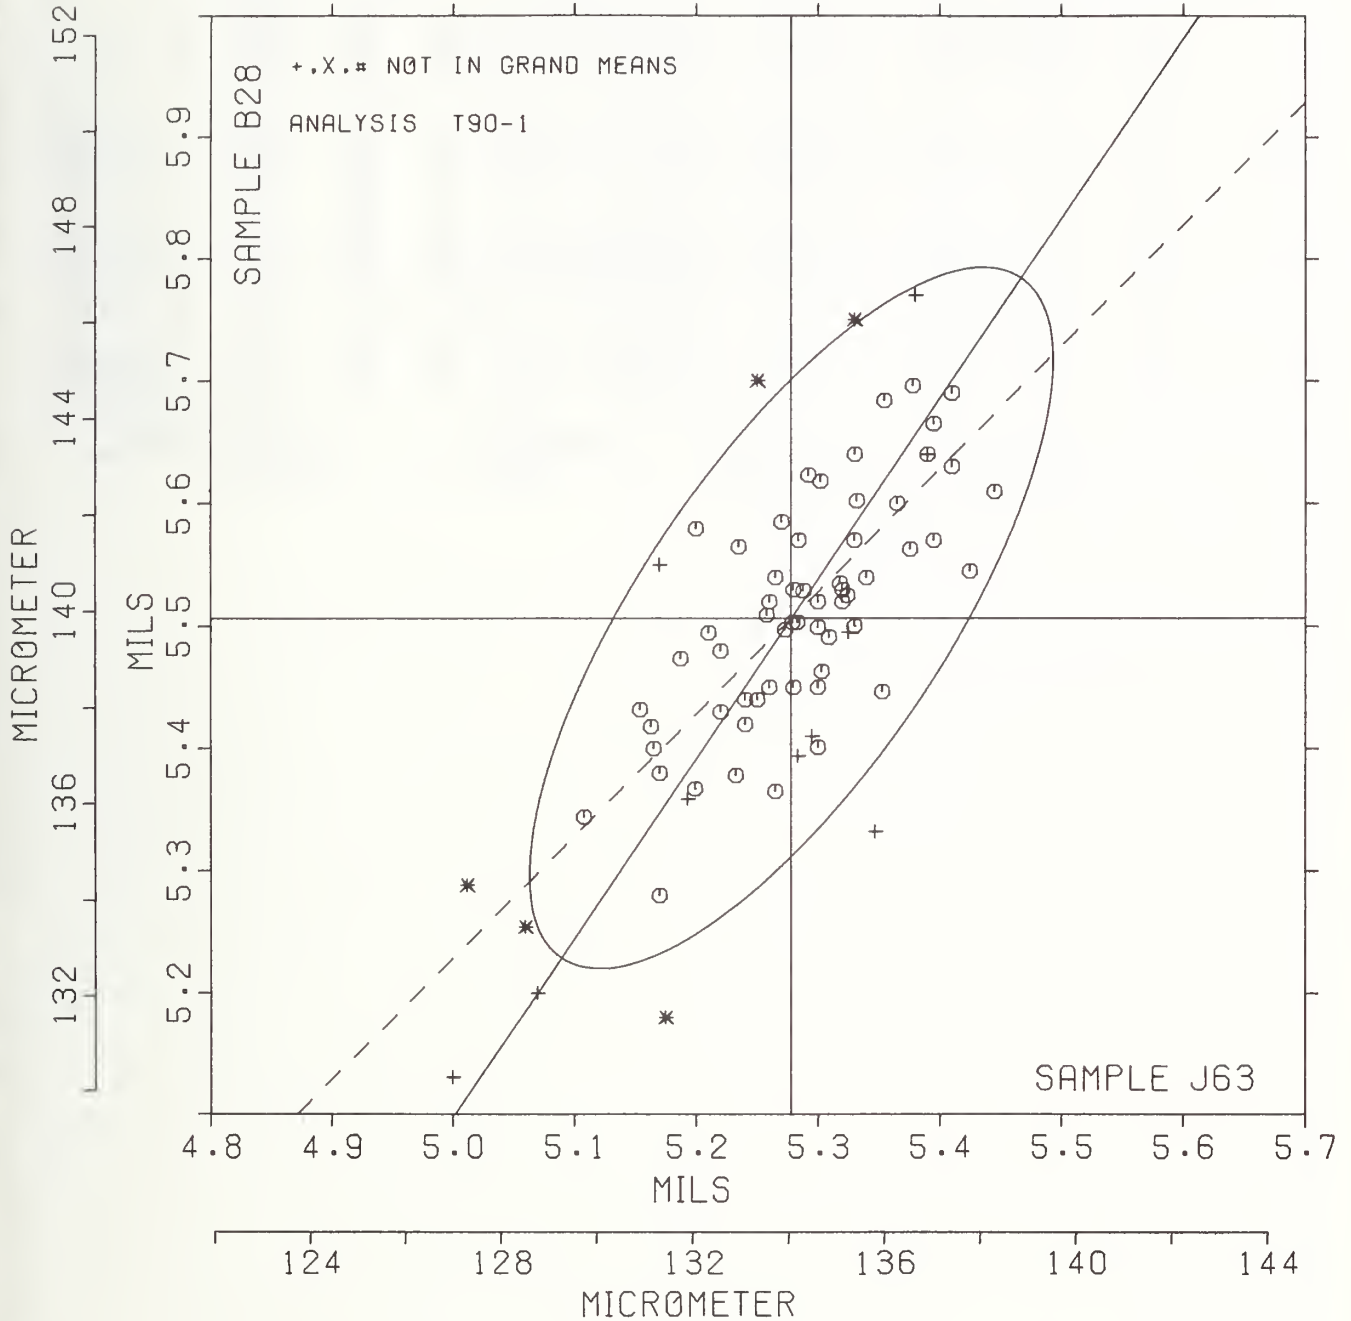


LAB CODE	F	MEANS		COORDINATES		AVG		PROPERTY---TEST INSTRUMENT---CONDITIONS
		D28	D29	MAJOR	MINOR	R. SDR	VAR	
L162	#	6.25	8.25	-143.79	-28.53	.00	95K	BASIS WEIGHT (GRAMMAGE), WEIGHED AS RECEIVED
L560	#	93.27	120.94	-4.11	-.94	.92	95A	BASIS WEIGHT (GRAMMAGE), CHANDLER * PRICE PAPER CUTTER
L297	Ø	94.63	123.67	-1.29	.21	.70	95C	BASIS WEIGHT (GRAMMAGE), CUTTING BOARD
L626	Ø	94.75	123.75	-1.15	.20	1.54	95E	BASIS WEIGHT (GRAMMAGE), GUILLOTINE TYPE CUTTER
L558	Ø	94.92	123.59	-1.13	-.03	1.35	95A	BASIS WEIGHT (GRAMMAGE), CHANDLER * PRICE PAPER CUTTER
L559	Ø	95.07	123.23	-1.25	-.40	.75	95D	BASIS WEIGHT (GRAMMAGE), DIE CUT
L213	Ø	95.61	124.10	-.27	-.10	1.16	95F	BASIS WEIGHT (GRAMMAGE), FOUR-SQUARE CUTTER
L561	Ø	95.78	125.00	.45	.46	2.06	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L280	Ø	95.82	124.78	.33	.27	1.13	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L616	Ø	95.92	124.38	.15	-.10	1.27	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L249	Ø	96.04	125.00	.64	.29	.37	95I	BASIS WEIGHT (GRAMMAGE), INGENTØ PAPER CUTTER
L344	Ø	96.04	125.03	.67	.31	.47	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L121	Ø	96.13	124.30	.25	-.30	1.05	95B	BASIS WEIGHT (GRAMMAGE), CONCORDA CUTTER
L557	#	96.30	96.23	-18.09	-21.54	1.61	95A	BASIS WEIGHT (GRAMMAGE), CHANDLER * PRICE PAPER CUTTER
L339	Ø	96.34	124.80	.74	-.06	.20	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L597	Ø	96.60	124.40	.67	-.53	.88	95C	BASIS WEIGHT (GRAMMAGE), CUTTING BOARD
L305	Ø	96.79	124.96	1.18	-.23	1.06	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
L233	#	107.04	139.81	18.67	4.20	.75	95T	BASIS WEIGHT (GRAMMAGE), TEMPLATE CUT
GMEANS:		95.75	124.36			1.00		
		95% ELLIPSE:		2.49	.87			WITH GAMMA = 41 DEGREES

GRAMMAGE (MASS PER UNIT AREA)

SAMPLE D28 = 95.7 G/SQ.METER

SAMPLE D29 = 124.4 G/SQ.METER

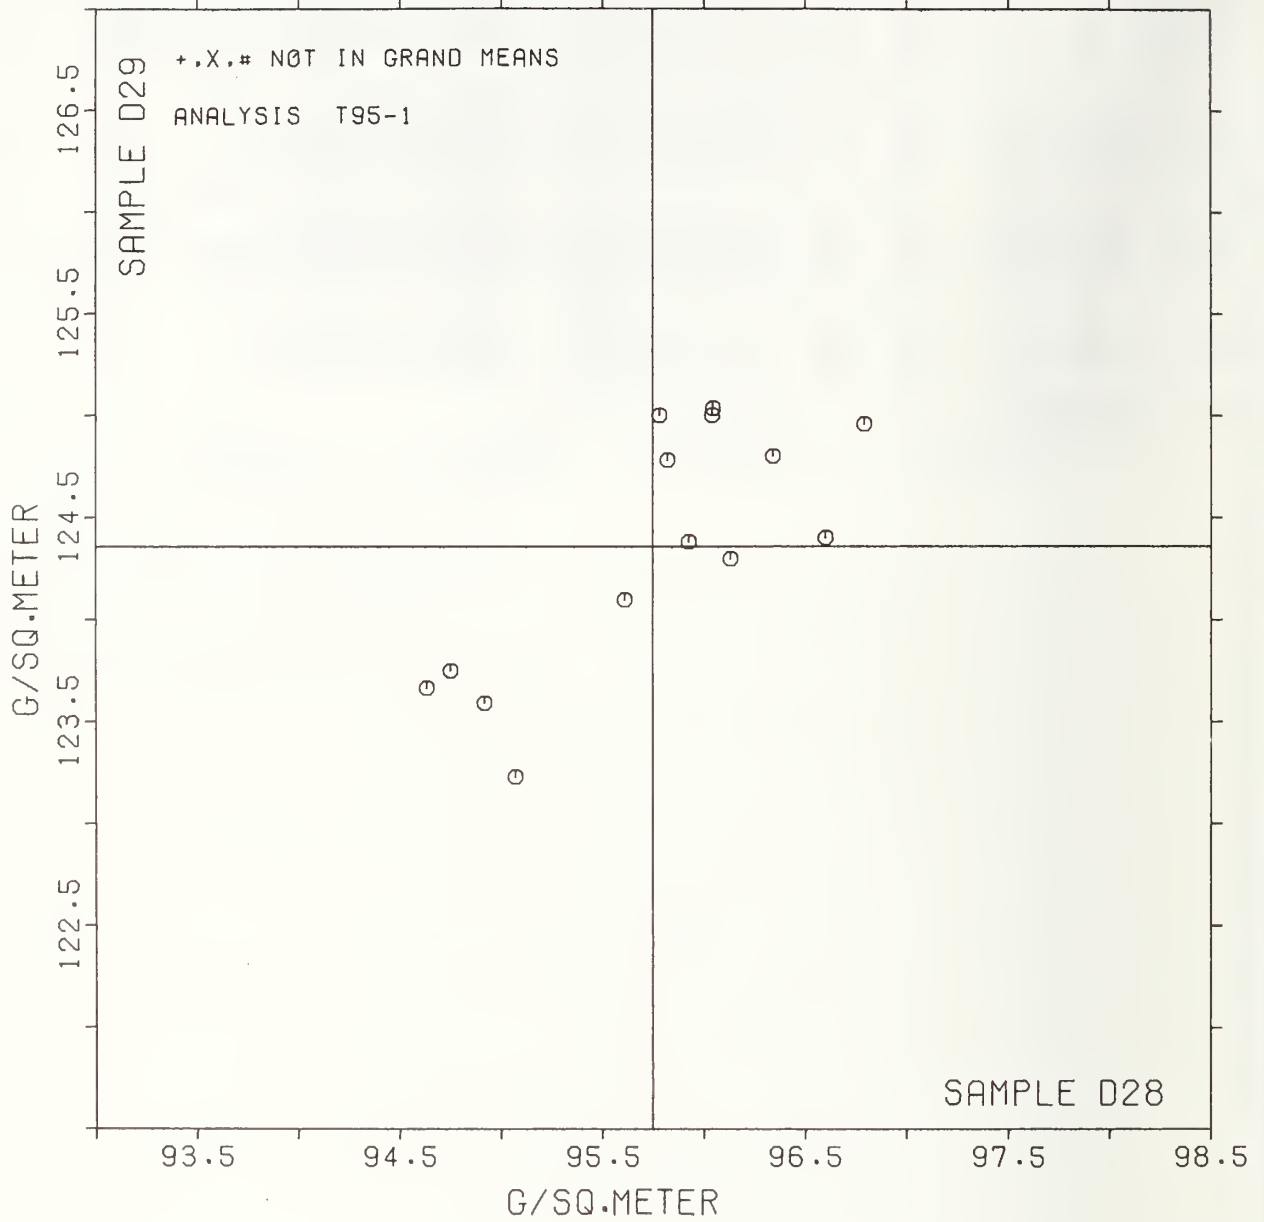

SUMMARY TABLE

TEST METHOD	SAMPLE CODE	GRAND MEAN	SD GP MEAN	AVER SDR	REPL CRP	LABS INCL	LABS PARTIC	REPL TAPPI	REPEAT	REPROD
AIR RESISTANCE, GURLEY	J47	30.0	1.1	1.5	10	50	55	10	1.3	2.9
T40-1 GURLEY UNITS	E73	17.5	1.1	1.5					1.3	3.1
AIR RESISTANCE, SHEPFIELD	J47	106.3	4.7	4.0	10	38	43	10	3.5	13.0
T40-2 SHEPP. UNITS	E73	157.9	7.1	11.1					9.7	19.6
AIR RESISTANCE, GURLEY HG PL0TATION	E37	755.	39.	79.	10	13	14	10	69.	107.
T41-1 SEC/10 CC	B73	1078.	248.	415.					363.	687.
SM00THNESS, PARKER PRINTSURF	H45	5.95	.46	.10	10	7	7	10	.09	1.27
T44-1 MICRONS	J12	5.05	.28	.23					.20	.79
SM00THNESS, SHEPFIELD	H45	262.9	9.8	9.1	15	78	86	10	7.9	27.5
T45-1 SHEPP. UNITS	J12	143.0	6.7	11.1					9.7	19.3
SM00THNESS, BEKK	H45	15.20	1.26	.80	15	7	13	10	.70	3.52
T45-2 BEKK SECONDS	J12	32.78	2.25	4.35					3.81	6.62
SM00THNESS, BENDISEN	H45	460.	120.	42.	10	9	9	10	37.	332.
T47-1 ML/MIN	J12	176.	15.	24.					21.	41.
K & N INK ABSORPTION	B80	23.20	3.05	.66	4	6	8	4	.92	8.46
T56-1 K & N UNITS	E50	64.09	4.61	.33					.46	12.76
PH, C0LD	J77	7.31	.35	.09	5	6	6	2	.18	.99
T57-1 PH UNITS	J14	7.31	.40	.05					.11	1.11
PH, H0T	J77	7.748	.127	.053	5	4	6	2	.104	.361
T57-2 PH UNITS	J14	7.756	.066	.067					.131	.210
OPACITY, B&L TYPE, 89% BACKING	E40	96.16	.31	.21	10	74	87	5	.26	.89
T60-1 PERCENT	J57	92.74	.54	.37					.46	1.53
OPACITY, B&L TYPE, PAPER BACKING	E40	96.07	.15	.24	10	7	7	5	.30	.47
T60-2 PERCENT	J57	92.97	.34	.30					.37	.97
OPACITY, ELREPH0 TYPE, PAPER BACKING	E40	96.69	.10	.10	10	8	10	5	.12	.29
T60-3 PERCENT	J57	93.55	.18	.18					.23	.51
BLUE REFLECTANCE, DIRECTIONAL	J37	75.79	.42	.16	8	20	42	6	.18	1.17
T65-1 PERCENT	J35	83.98	.44	.14					.16	1.23
BLUE REFLECTANCE, DIFFUSE, WITH TRAP	J37	75.43	.29	.15	8	10	15	6	.17	.82
T65-2 PERCENT	J35	84.43	.14	.09					.10	.40
BLUE REFLECTANCE, DIFFUSE, N0 TRAP	J37	76.58	.37	.11	8	10	13	6	.13	1.03
T65-3 PERCENT	J35	84.28	.33	.06					.07	.91
SPECULAR GLOSS, 75 DEGREE	E58	84.32	1.07	.48	10	42	48	5	.60	2.99
T75-1 GLOSS UNITS	J20	47.68	1.93	1.39					1.72	5.47
THICKNESS (CALIPER)	J63	5.278	.085	.052	10	64	76	10	.045	.236
T90-1 MILS	B28	5.506	.113	.101					.089	.314
GRAMMAGE (MASS PER UNIT AREA)	D28	95.75	.68	.73	10	14	18	3	1.17	2.11
T95-1 G/SQ.METER	D29	124.36	.61	.58					.92	1.85

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET	1. PUBLICATION OR REPORT NO. TAPPI CRP 54G	2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE Technical Association of the Pulp and Paper Industry COLLABORATIVE REFERENCE PROGRAM FOR PAPER Report #54G		5. Publication Date September 22, 1978	6. Performing Organization Code
7. AUTHOR(S) R. G. Powell, E. B. Randall, Jr., J. Horlick	8. Performing Organ. Report No. NBSIR 78-1350		
9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS DEPARTMENT OF COMMERCE WASHINGTON, D.C. 20234		10. Project/Task/Work Unit No. 7825578	11. Contract/Grant No.
12. Sponsoring Organization Name and Complete Address (Street, City, State, ZIP) Collaborative Testing Services, Inc., 9241 Wood Glade Drive, Great Falls, Virginia 22066; and Technical Association of the Pulp and Paper Industry		13. Type of Report & Period Covered Final	14. Sponsoring Agency Code
15. SUPPLEMENTARY NOTES			
16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.) Collaborative Reference Programs provide participating laboratories with the means for checking periodically the level and uniformity of their testing in comparison with that of other participating laboratories. An important by-product of the programs is the provision of realistic pictures of the state of the testing art. This is one of the periodic reports showing averages for each participant, within and between laboratory variability, and other information for participants and standards committees.			
17. KEY WORDS (six to twelve entries; alphabetical order; capitalize only the first letter of the first key word unless a proper name; separated by semicolons) Collaborative reference program; Laboratory evaluation; Paper; Precision; Reference samples, Testing calibration			
18. AVAILABILITY <input type="checkbox"/> Unlimited <input checked="" type="checkbox"/> For Official Distribution. Do Not Release to NTIS <input type="checkbox"/> Order From Sup. of Doc., U.S. Government Printing Office Washington, D.C. 20402, SD Stock No. SN003-003 <input type="checkbox"/> Order From National Technical Information Service (NTIS) Springfield, Virginia 22151		19. SECURITY CLASS (THIS REPORT) UNCLASSIFIED	21. NO. OF PAGES 56
20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED		22. Price	